

Prüfbericht-Nr.: Test report no.:	CN25BLLG 001	Auftrags-Nr.: Order no.:	180329004	Seite 1 von 29 Page 1 of 29
Kunden-Referenz-Nr.: Client reference no.:	N/A	Auftragsdatum: Order date:	2025.04.01	
Auftraggeber: Client:	Ningbo Deli tools Co., Ltd. No.128, Chezhan West Road, Huangtan Town, NingHai County, Ningbo, 315000 Zhejiang P.R. China			
Prüfgegenstand: Test item:	Impact Drill			
Bezeichnung / Typ-Nr.: Identification / Type no.:	DL-CZ13-E6			
Auftrags-Inhalt: Order content:	TÜV Rheinland – EMC Service			
Prüfgrundlage: Test specification:	EN IEC 55014-1:2021 EN IEC 55014-2:2021 EN 61000-3-3:2013+A1+A2 EN IEC 61000-3-2:2019+A1+A2			
Wareneingangsdatum: Date of sample receipt:	2025.03.19			
Prüfmuster-Nr.: Test sample no.:	A003932343-002			
Prüfzeitraum: Testing period:	2025.03.25-2025.04.03			
Ort der Prüfung: Place of testing:	Refer to section 1.1			
Prüflaboratorium: Testing laboratory:	TÜV Rheinland / CCIC (Ningbo) Co., Ltd.			
Prüfergebnis*: Test result*:	Pass			
geprüft von: tested by:	genehmigt von: authorized by:			
Datum: Date:	2025.04.14		Ausstelldatum: Issue date:	
Stellung / Position:	Shey Zheng/PE		2025.04.14	
Stellung / Position:	Shey Zheng/PE		Carrie Lei/Authorizer	
Sonstiges / Other:				
Zustand des Prüfgegenstandes bei Anlieferung: Condition of the test item at delivery:		Prüfmuster vollständig und unbeschädigt Test item complete and undamaged		
* Legende:	P(ass) = entspricht o.g. Prüfgrundlage(n)	F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	N/A = nicht anwendbar	N/T = nicht getestet
* Legend:	P(ass) = passed a.m. test specification(s)	F(ail) = failed a.m. test specification(s)	N/A = not applicable	N/T = not tested
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.				

Prüfbericht - Nr.: CN25BLLG 001

Test Report No.:

Seite 2 von 29

Page 2 of 29

Anmerkungen

Remarks

- | | |
|----------|--|
| 1 | <p>Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben.</p> <p>Detaillierte Informationen bezüglich Prüfkonditionen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden.</p> <p><i>The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system.</i></p> <p><i>Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.</i></p> |
| 2 | <p>Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben. Informationen zur Verifizierung der Authentizität unserer Dokumente erhalten Sie auf folgender Webseite: go.tuv.com/digital-signature</p> <p><i>As contractually agreed, this document has been signed digitally only. TÜV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TÜV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged. For information on verifying the authenticity of our documents, please visit the following website: go.tuv.com/digital-signature</i></p> |
| 3 | <p>Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben. Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt.</p> <p><i>Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report. Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.</i></p> |
| 4 | <p>Die Entscheidungsregel für Konformitätserklärungen basierend auf numerischen Messergebnissen in diesem Prüfbericht basiert auf der "Null-Grenzwert-Regel" und der "Einfachen Akzeptanz" gemäß ILAC G8:2019 und IEC Guide 115:2021, es sei denn, in der auf Seite 1 dieses Berichts genannten angewandten Norm ist etwas anderes festgelegt oder vom Kunden gewünscht. Dies bedeutet, dass die Messunsicherheit nicht berücksichtigt wird und daher auch nicht im Prüfbericht angegeben wird. Zu weiteren Informationen bezüglich des Risikos durch diese Entscheidungsregel siehe ILAC G8:2019.</p> <p><i>The decision rule for statements of conformity, based on numerical measurement results, in this test report is based on the "Zero Guard Band Rule" and "Simple Acceptance" in accordance with ILAC G8:2019 and IEC Guide 115:2021, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report. For additional information to the resulting risk based of this decision rule please refer to ILAC G8:2019.</i></p> |

TEST SUMMARY

5.1.1 HARMONICS ON AC MAINS

Result:

Pass

5.1.2 VOLTAGE CHANGES, VOLTAGE FLUCTUATIONS AND FLICKER ON AC MAINS

Result:

Pass

5.1.3 MAINS TERMINAL CONTINUOUS DISTURBANCE VOLTAGE

Result:

Pass

5.1.4 DISCONTINUOUS INTERFERENCE ON AC MAINS

Result:

N/A

5.2.1 DISTURBANCE POWER

Result:

Pass

5.2.2 RADIATED DISTURBANCE IN THE FREQUENCY RANGE FROM 30MHZ TO 1000MHZ

Result:

Pass

6.1.1 ELECTROSTATIC DISCHARGE

Result:

Pass

6.2.1 FAST TRANSIENTS ON AC POWER LINES

Result:

Pass

6.2.2 INJECTED CURRENT INTO AC POWER PORT

Result:

Pass

6.2.3 SURGES TO AC POWER PORT

Result:

Pass

6.2.4 VOLTAGE DIPS AND INTERRUPTIONS TO AC POWER PORT

Result:

Pass

Contents

1	TEST SITES	5
1.1	TEST FACILITIES	5
1.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS	5
1.3	MEASUREMENT UNCERTAINTY.....	6
2	GENERAL PRODUCT INFORMATION	7
2.1	PRODUCT FUNCTION AND INTENDED USE.....	7
2.2	RATINGS AND SYSTEM DETAILS	7
2.3	INDEPENDENT OPERATION MODES	7
2.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS	7
2.5	SUBMITTED DOCUMENTS.....	7
3	TEST SET-UP AND OPERATION MODES	8
3.1	PRINCIPLE OF CONFIGURATION SELECTION.....	8
3.2	PHYSICAL CONFIGURATION FOR TESTING	8
3.3	TEST OPERATION AND TEST SOFTWARE	8
3.4	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	8
3.5	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....	8
4	CONFORMITY DECISION RULE	9
5	TEST RESULTS EMISSION	10
5.1	EMISSION IN THE FREQUENCY RANGE UP TO 30 MHz	10
5.1.1	Harmonics on AC Mains	10
5.1.2	Voltage changes, voltage fluctuations and flicker on AC mains	12
5.1.3	Mains Terminal Continuous Disturbance Voltage.....	13
5.1.4	Discontinuous Interference on AC Mains	16
5.2	EMISSION IN THE FREQUENCY RANGE ABOVE 30 MHz.....	17
5.2.1	Disturbance Power.....	17
5.2.2	Radiated Disturbance in the Frequency Range from 30MHz to 1000MHz.....	19
6	TEST RESULTS IMMUNITY	20
6.1	ENCLOSURE	21
6.1.1	Electrostatic Discharge.....	21
6.2	INPUT AND OUTPUT AC POWER PORTS	22
6.2.1	Fast Transients on AC Power Lines.....	22
6.2.2	Injected Current into AC Power Port.....	23
6.2.3	Surges to AC Power Port	24
6.2.4	Voltage dips and interruptions to AC Power Port	25
7	PHOTOGRAPHS OF THE TEST SET-UP	26
8	LIST OF TABLES.....	29
9	LIST OF FIGURES.....	29
10	LIST OF PHOTOGRAPHS	29

1 Test Sites

1.1 Test Facilities

Laboratory A: TÜV Rheinland /CCIC(Ningbo) Co., Ltd.

1st Floor, Building 11, Scholar Innovation Park, No.1188 Zhongguan Road, Zhenhai District, Ningbo 315200 P.R. China.

Laboratory B: EMTEK (NINGBO) CO., LTD.

No. 8, Building 8, Lane 216, Qingyi Road, High-tech Zone, Ningbo, Zhejiang P.R. China

The used test equipment is in accordance with CISPR 16-1 series standards for measurement of radio interference.

The harmonics, voltage changes, voltage fluctuations and flicker test were performed in Laboratory B. The other test items were performed in Laboratory A.

1.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment of Laboratory A

No.	Equipment	Model	Serial no.	Cal. due date
1.	EMI test receiver	ESR3	102331	2025.10.22
2.	LISN	ENV216	102250	2025.10.22
3.	EMI test receiver	ESR3	102362	2025.10.22
4.	Absorbing clamp	MDS-21	100857	2025.10.28
5.	ESD generator	NX30.1	11744	2025.11.19
6.	CS immunity test	NSG 4070C-80	47606	2025.10.22
7.	CDN	CDN M016S	47812	2025.10.24
8.	Attenuator	JTH-SJ-100W-6dB	100145143000573	N/A
9.	EFT/Surge/PFM/Dips Immunity test system	Compact NX5 bsp-1-300-16	P1725200261	2025.10.22

Table 2: List of Test and Measurement Equipment of Laboratory B

No.	Equipment	Model	Serial no.	Cal. due date
1.	Harmonics/flicker analyzer	ECTS2-3300Z-M18012	550128	2025.11.14
2.	AC Power source	330AZX-CE	140250014	2025.11.14

Prüfbericht - Nr.: CN25BLLG 001

Test Report No.:

Seite 6 von 29

Page 6 of 29

1.3 Measurement Uncertainty

Table 3: Measurement Uncertainty of Laboratory A

Test Item	Expanded Measurement Uncertainty (k=2)
Conducted Emission (9-150kHz)	3.70dB
Conducted Emission (150k-30MHz)	3.30dB
Disturbance Power	4.27dB
Radiated Emission (30-1000MHz)	4.39dB
Radiated Emission (1-18GHz)	4.67dB
Radiated Emission (CDNE method)	4.05dB

2 General Product Information

2.1 Product Function and Intended Use

The EUT (equipment under test) is an ordinary Impact Drill for household and similar use.
For the further information, refer to the user's manual.

2.2 Ratings and System Details

Rated voltage	:	AC 220-240V
Frequency	:	50/60Hz
Rated power	:	820W
Protection class	:	II
Highest clock frequency F_x	:	< 15 MHz

Refer to the user's manual for further information.

2.3 Independent Operation Modes

The basic operation modes are: "On" or "Off", with power regulation means.
Refer to the user's manual for further information.

2.4 Noise Generating and Noise Suppressing Parts

Refer to the Circuit diagram.

2.5 Submitted Documents

Circuit diagram, label and user's manual etc.

3 Test Set-up and Operation Modes

3.1 Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test conditions were adapted accordingly in reference to the instructions for use.

Refer to the related paragraph of this report.

Immunity: The equipment under test (EUT) was configured to have its highest possible susceptibility against the tested phenomena. The test conditions were adapted accordingly in reference to the instructions for use.

Refer to the related paragraph of this report.

3.2 Physical Configuration for Testing

Refer to the related paragraph of this report.

3.3 Test Operation and Test Software

Refer to the related paragraph of this report. No software was used.

3.4 Special Accessories and Auxiliary Equipment

None.

3.5 Countermeasures to achieve EMC Compliance

The tested sample contained noise suppression components as described in the circuit diagram. No special measure is employed to achieve the requirement.

4 Conformity Decision Rule

For all EMI tests (when included in this report), as measurement uncertainties are less than the values U_{CISPR} given in CISPR 16-4-2, compliance with the limits is determined by comparing measurement results directly with corresponding limits without taking into consideration of measurement uncertainties. For all EMS tests (when included in this report), measurement uncertainties are not considered as well according to corresponding test standards.

Prüfbericht - Nr.: CN25BLLG 001

Test Report No.:

Seite 10 von 29

Page 10 of 29

5 Test Results EMISSION

5.1 Emission in the Frequency Range up to 30 MHz

5.1.1 Harmonics on AC Mains

Result:	Pass
----------------	-------------

Date of testing : 2025.04.03
Test procedure : EN IEC 61000-3-2:2019+A1+A2
Test duration : 2.5min
Harmonic order : 2 – 40th
Frequency range : 0 – 2kHz
Test voltage : 230V, 50Hz
Ambient Condition : Temperature: 21 °C; Relative Humidity: 46 %
Test conditions : EN IEC 61000-3-2:2019+A1+A2 clause B

The harmonics on AC Mains in the frequency from 0 to 2 kHz were measured in accordance with EN IEC 61000-3-2:2019+A1+A2.

The measurement was conducted with an automatic current harmonic analyzing system. This equipment is in compliance with the requirements of EN IEC 61000-3-2:2019+A1+A2.

The results indicated in the following tables and figures were those measured and recorded by an automatic measuring system.

Prüfbericht - Nr.: CN25BLLG 001

Test Report No.:

Seite 11 von 29

Page 11 of 29

Table 4: Harmonic currents measurement results

Test category: Class-B

Test Result: PASS

Vrms (Volts)/V-pk/V-CF:	229.35 / 325.6 / 1.420	Frequency (Hz):	50.0001
I _{rms} (Amps):	0.826	Power (VA)/VAR:	189.36 / 177.08
I _{fund} /I _{ref} (Amps):	0.602 / 0.6169	Power (W):	67.20
I _{peak} (Amps)/I-CF:	2.692 / 3.042	Power Factor:	0.354
V-THD (%):	0.07	I-THD (%):	92.95
POHC (A):	0.0240 (method C.3)	POHC Limit (A):	0.2514
I-THC (A):	0.558	Meas. Pwr (Min / Max)	54.05W/68.50W
Phase angle of H5 (deg):	58.97		

Harm No.	Harm. Ave.	Limit (100%)	% Of Limits	Result (Ave.)	Harm. Win.	Win. (150%)	% Of Max	Result (Max.)
2	0.1371	1.6200	8.5	PASS	0.1516	2.4300	6.2	PASS
3	0.4545	3.4500	13.2	PASS	0.4754	5.1750	9.2	PASS
4	0.0915	0.6450	14.2	PASS	0.1	0.9675	10.3	PASS
5	0.24	1.7100	14.0	PASS	0.2501	2.5650	9.8	PASS
6	0.0453	0.4500	10.1	PASS	0.0472	0.6750	7.0	PASS
7	0.0735	1.1550	6.4	PASS	0.0763	1.7325	4.4	PASS
8	0.0193	0.3450	5.6	PASS	0.022	0.5175	4.3	PASS
9	0.0325	0.6000	5.4	PASS	0.0363	0.9000	4.0	PASS
10	0.0243	0.2760	8.8	PASS	0.0255	0.4140	6.2	PASS
11	0.0195	0.4950	3.9	PASS	0.0221	0.7425	3.0	PASS
12	0.0334	0.2300	14.5	PASS	0.035	0.3449	10.1	PASS
13	0.0102	0.3150	3.2	PASS	0.0135	0.4725	2.9	PASS
14	0.0337	0.1971	17.1	PASS	0.0345	0.2957	11.7	PASS
15	0.0166	0.2250	7.4	PASS	0.0178	0.3375	5.3	PASS
16	0.0292	0.1725	16.9	PASS	0.0301	0.2588	11.6	PASS
17	0.0059	0.1986	3.0	PASS	0.0073	0.2979	2.5	PASS
18	0.0252	0.1533	16.4	PASS	0.026	0.2300	11.3	PASS
19	0.0049	0.1776	2.8	PASS	0.0057	0.2664	2.1	PASS
20	0.0208	0.1380	15.1	PASS	0.0216	0.2070	10.4	PASS
21	0.0026	0.1607	1.6	PASS	0.0035	0.2410	1.5	PASS
22	0.0171	0.1254	13.6	PASS	0.0181	0.1881	9.6	PASS
23	0.0066	0.1467	4.5	PASS	0.0075	0.2201	3.4	PASS
24	0.0145	0.1151	12.6	PASS	0.0151	0.1726	8.7	PASS
25	0.0081	0.1350	6.0	PASS	0.0088	0.2025	4.3	PASS
26	0.0112	0.1062	10.5	PASS	0.012	0.1593	7.5	PASS
27	0.0067	0.1250	5.4	PASS	0.0074	0.1874	3.9	PASS
28	0.0089	0.0986	9.0	PASS	0.0098	0.1478	6.6	PASS
29	0.0096	0.1164	8.2	PASS	0.0101	0.1746	5.8	PASS
30	0.007	0.0920	7.6	PASS	0.0075	0.1379	5.4	PASS
31	0.0086	0.1080	8.0	PASS	0.0094	0.1620	5.8	PASS
32	0.0045	0.0863	5.2	PASS	0.0052	0.1294	4.0	PASS
33	0.0081	0.1023	7.9	PASS	0.009	0.1535	5.9	PASS
34	0.0031	0.0812	3.8	PASS	0.004	0.1217	3.3	PASS
35	0.009	0.0965	9.3	PASS	0.0094	0.1447	6.5	PASS
36	0.0019	0.0767	2.5	PASS	0.0026	0.1150	2.3	PASS
37	0.0072	0.0912	7.9	PASS	0.0077	0.1368	5.6	PASS
38	0.0015	0.0726	2.1	PASS	0.0019	0.1089	1.7	PASS
39	0.0071	0.0866	8.2	PASS	0.008	0.1298	6.2	PASS
40	0.0016	0.0690	2.3	PASS	0.0019	0.1035	1.8	PASS

Prüfbericht - Nr.: CN25BLLG 001
Test Report No.:

Seite 12 von 29
Page 12 of 29

5.1.2 Voltage changes, voltage fluctuations and flicker on AC mains

Result:	Pass
----------------	-------------

Date of testing : 2025.04.03
Test procedure : EN 61000-3-3:2013+A1+A2
Ambient Condition : Temperature: 21 °C; Relative Humidity: 46%

According to the characteristics of the sample, as specified by clause 5 of the basic standard, following limits apply:

- the value of $d(t)$ during a voltage change shall not exceed 3.3% for more than 500ms;
- the relative steady-state voltage change, d_c , shall not exceed 3.3%;
- the maximum relative voltage change d_{max} , shall not exceed 7%.

Following are the measurement results obtained via an automatic testing system.

Table 5: Voltage fluctuations and flicker measurement results

	d_c	d_{max} (average)	$d(t)$	P_{st}	P_{lt}
Limits	3.3%	7%	3.3%/500ms	N/A	N/A
Result	0.428%	2.562%	0ms	N/A	N/A

Prüfbericht - Nr.: CN25BLLG 001

Test Report No.:

Seite 13 von 29

Page 13 of 29

5.1.3 Mains Terminal Continuous Disturbance Voltage

Result:	Pass
----------------	-------------

Date of testing : 2025.03.25
 Kind of test site : EMC Shielding Room
 Port : Mains
 Basic Standard : EN IEC 55014-1:2021
 Frequency Range : 150kHz – 30MHz
 Ambient Condition : Temperature:21 °C; Relative Humidity: 55%

Test Setup

Input Voltage : AC 230V, 50Hz
 Operational mode : ON
 Artificial hand : Applied
 Earthing : through artificial hand to AMN. (as class II equipment)

The measurement setup was made according to EN IEC 55014-1:2021 in an EMC shielding room.

The measurement equipment like test receiver, quasi-peak detector and Artificial Mains Network (AMN) are in compliance with CISPR 16-1 series standards and EN IEC 55014-1:2021. The tested object was operated under its rated voltage and its rated frequency. Prior to the measurements the test object operated about 15 minutes (warm-up) in order to stabilize its operating conditions and to ensure reliable measurement values.

Furthermore an internal calibration with the test receiver was conducted prior to and after each measurement.

The tested object was set-up on a wooden table and 0.8m away from the AMN. The EUT (Equipment under Test) was wrapped with artificial hand which was earthed through the Artificial Mains Network (AMN).

The Disturbance Voltage was determined according to according to clause 5 of EN IEC 55014-1:2021 while measuring the anode and cathode conductor by turns.


The following figures were those measured by an automatic measuring system. The disturbance voltage was scanned firstly with both Peak and Average detector and then a final measurement was performed with both Quasi-peak and Average detector at the frequencies which showed the Max. in a designated frequency sub-range. In the figures below, the higher curve is that of peak-value and the lower one is average-value. The symbol “♦” refers to Quasi-peak value and the Average value which were measured in the final measurement.

Prüfbericht - Nr.: CN25BLLG 001
Test Report No.:

Seite 14 von 29
Page 14 of 29

Figure 1: Spectral Diagrams, Conducted Emission, 150kHz - 30MHz, L

Full Spectrum

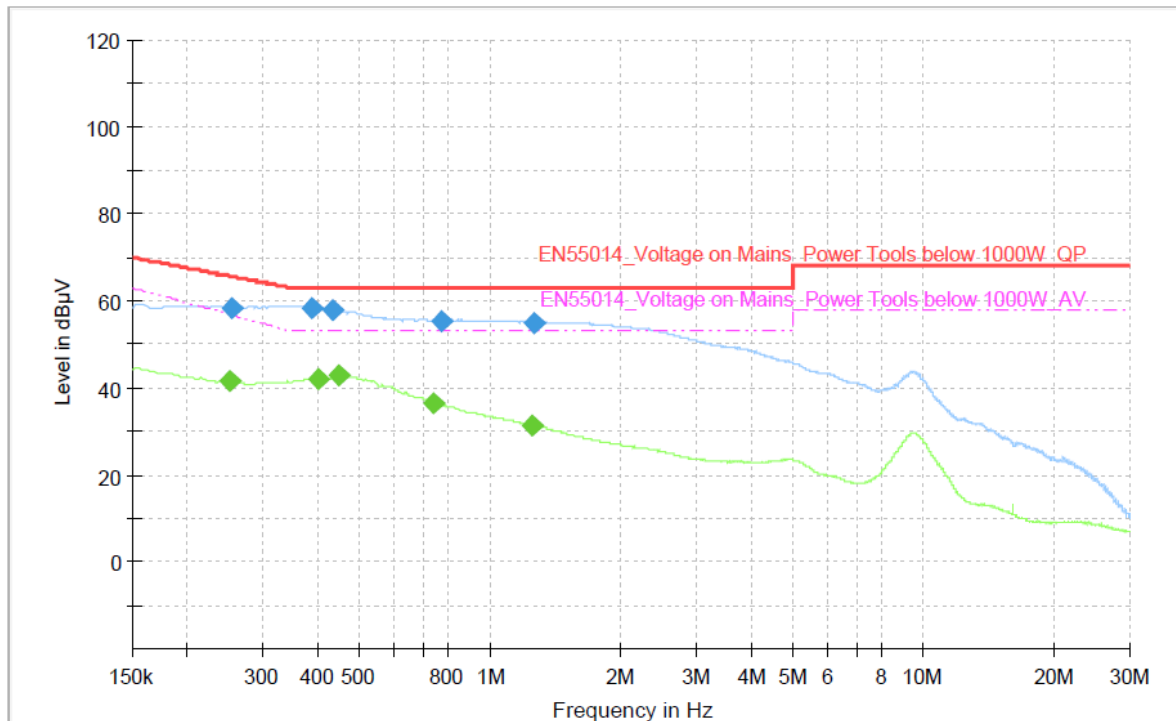

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.251250	---	41.66	56.91	15.25	1000.0	9.000	L1	ON	9.7
0.253500	58.41	---	65.67	7.26	1000.0	9.000	L1	ON	9.7
0.388500	58.42	---	63.00	4.58	1000.0	9.000	L1	ON	9.7
0.399750	---	42.18	53.00	10.82	1000.0	9.000	L1	ON	9.7
0.433500	57.94	---	63.00	5.06	1000.0	9.000	L1	ON	9.7
0.447000	---	42.80	53.00	10.20	1000.0	9.000	L1	ON	9.7
0.737250	---	36.51	53.00	16.49	1000.0	9.000	L1	ON	9.7
0.771000	55.35	---	63.00	7.65	1000.0	9.000	L1	ON	9.7
1.250250	---	31.29	53.00	21.71	1000.0	9.000	L1	ON	9.7
1.263750	54.94	---	63.00	8.06	1000.0	9.000	L1	ON	9.7

Prüfbericht - Nr.: CN25BLLG 001


Test Report No.:

Seite 15 von 29

Page 15 of 29

Figure 2: Spectral Diagrams, Conducted Emission, 150kHz - 30MHz, N

Full Spectrum

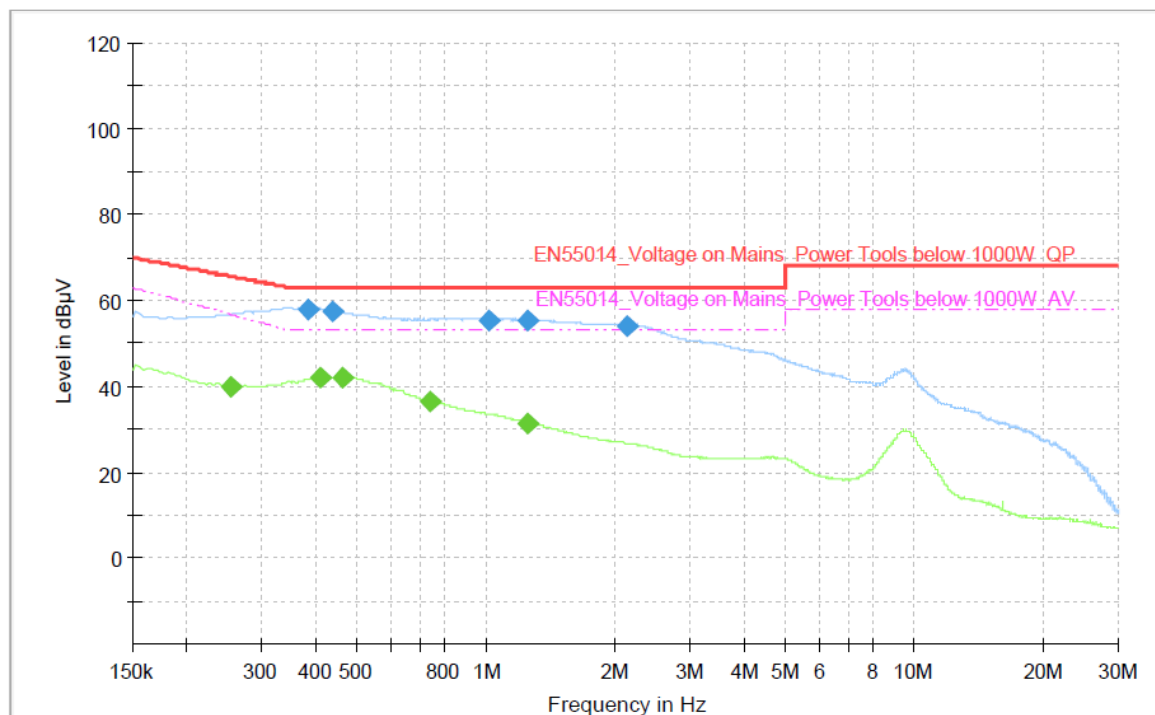

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.253500	---	39.74	56.81	17.07	1000.0	9.000	N	ON	9.6
0.381750	57.87	---	63.00	5.13	1000.0	9.000	N	ON	9.6
0.408750	---	42.03	53.00	10.97	1000.0	9.000	N	ON	9.6
0.435750	57.56	---	63.00	5.44	1000.0	9.000	N	ON	9.6
0.462750	---	42.23	53.00	10.77	1000.0	9.000	N	ON	9.6
0.737250	---	36.32	53.00	16.68	1000.0	9.000	N	ON	9.6
1.016250	55.53	---	63.00	7.47	1000.0	9.000	N	ON	9.7
1.250250	55.19	---	63.00	7.81	1000.0	9.000	N	ON	9.7
1.252500	---	31.58	53.00	21.42	1000.0	9.000	N	ON	9.7
2.127750	54.25	---	63.00	8.75	1000.0	9.000	N	ON	9.7

Prüfbericht - Nr.: CN25BLLG 001

Test Report No.:

Seite 16 von 29

Page 16 of 29

5.1.4 Discontinuous Interference on AC Mains

Result:	N/A
----------------	------------

5.2 Emission in the Frequency Range above 30 MHz

5.2.1 Disturbance Power

Result:	Pass
----------------	-------------

Date of testing : 2025.03.25
Port : Mains
Basic Standard : EN IEC 55014-1:2021
Frequency Range : 30 – 300MHz
Limit : EN IEC 55014-1:2021, clause 4.3.4.4, Table 7
Ambient Condition : Temperature: 17 °C; Relative Humidity: 56 %

Test Setup

Input Voltage : AC 230V, 50Hz
Operational mode : ON
Earthing : No

Measuring configuration and description

The measurement setup was made according to EN IEC 55014-1:2021.

The measurement equipment like test receiver and absorption clamp are in compliance with CISPR 16-1 series standards. The test object has been operated by its rated voltage. Prior to the measurements the test objects operated about 10 minutes (warm-up) in order to stabilize their operating conditions and to ensure reliable measurement values.

Furthermore an internal calibration with the test receiver was conducted prior to each measurement.

Before measurement, a survey was made to determine in which state the maximum disturbance was obtained. And the measurement was made in the state the maximum disturbance was obtained.

The tested object was set-up on a wooden table.


The Disturbance Power was determined according to clause 4.3.4 of EN IEC 55014-1:2021. The length of power cord of EUT plus that of the extension cord was 6.0m.

The measurement was performed by operating the EUT in normal operation mode. The figures and tables below were those measured in the operation mode. Both Quasi Peak and Average Value were measured. In final measurement, by moving the absorption clamp along the power supply cord and the extension-power cord from the test object, Quasi-Peak and Average Value were measured and listed respectively where they had a maximum in previous scanning survey. In the Figures, the symbol “x” with red colour means Quasi-Peak Value and the symbol “+” with blue colour means Average Value which was measured in final measurement

Prüfbericht - Nr.: CN25BLLG 001
Test Report No.:

Seite 18 von 29
Page 18 of 29

Figure 3: Spectral Diagrams, Power Disturbance, Mains, 30–300MHz

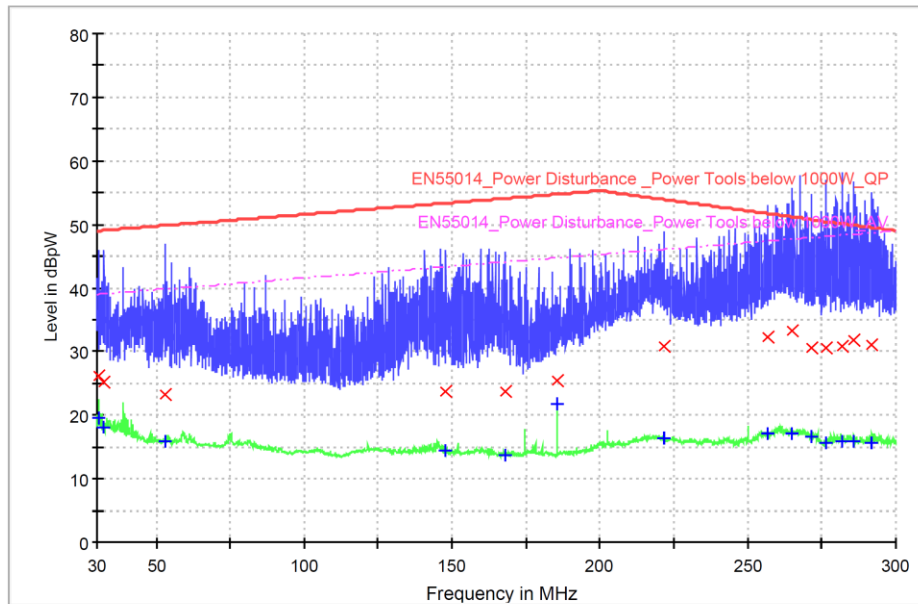

Limit and Margin-QP

Frequency (MHz)	QuasiPeak (dBpW)	Meas. Time (ms)	Bandwidth (kHz)	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBpW)
30.520000	26.3	1000.0	120.000	10.6	22.8	49.0
32.440000	25.3	1000.0	120.000	10.5	23.8	49.1
52.960000	23.2	1000.0	120.000	9.4	26.7	49.9
148.000000	23.8	1000.0	120.000	6.1	29.6	53.4
167.800000	23.6	1000.0	120.000	5.5	30.5	54.1
185.640000	25.4	1000.0	120.000	5.2	29.4	54.8
221.560000	30.7	1000.0	120.000	5.8	23.2	53.9
256.560000	32.3	1000.0	120.000	5.7	19.4	51.7
264.760000	33.2	1000.0	120.000	5.7	18.1	51.2
271.440000	30.7	1000.0	120.000	5.7	20.1	50.8
276.680000	30.7	1000.0	120.000	5.3	19.8	50.5
281.720000	30.9	1000.0	120.000	5.6	19.3	50.2
285.920000	31.8	1000.0	120.000	5.8	18.1	49.9
292.040000	31.1	1000.0	120.000	5.6	18.4	49.5

Limit and Margin-AV

Frequency (MHz)	Average (dBpW)	Meas. Time (ms)	Bandwidth (kHz)	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBpW)
30.520000	19.5	1000.0	120.000	10.6	19.6	39.0
32.440000	18.2	1000.0	120.000	10.5	20.9	39.1
52.960000	16.0	1000.0	120.000	9.4	23.9	39.9
148.000000	14.4	1000.0	120.000	6.1	29.0	43.4
167.800000	13.7	1000.0	120.000	5.5	30.4	44.1
185.640000	21.7	1000.0	120.000	5.2	23.0	44.8
221.560000	16.5	1000.0	120.000	5.8	29.6	46.1
256.560000	17.2	1000.0	120.000	5.7	30.2	47.4
264.760000	17.2	1000.0	120.000	5.7	30.5	47.7
271.440000	16.5	1000.0	120.000	5.7	31.4	47.9
276.680000	15.8	1000.0	120.000	5.3	32.4	48.1
281.720000	15.8	1000.0	120.000	5.6	32.5	48.3
285.920000	16.0	1000.0	120.000	5.8	32.5	48.5
292.040000	15.7	1000.0	120.000	5.6	33.0	48.7

Prüfbericht - Nr.: CN25BLLG 001
Test Report No.:

Seite 19 von 29
Page 19 of 29

5.2.2 Radiated Disturbance in the Frequency Range from 30MHz to 1000MHz

Result:

Pass

Port : Enclosure
Basic Standard : EN IEC 55014-1:2021 and CISPR16-2-3
Frequency Range : 30 –1000MHz
Limit : EN IEC 55014-1:2021, clause 4.3.4.5, Table 9.

According to a) of clause 4.3.4.2 of EN IEC 55014-1:2021:

“Appliances are deemed to comply in the frequency range from 300MHz to 1000MHz if both of the following conditions (1) and (2) are fulfilled:”

- 1): the disturbance power emission from the EUT is lower than the limits of Table 7 reduced by the values of Table 8;
- 2): the maximum clock frequency shall be less than 30MHz.

Because the EUT meets the two conditions mentioned above, the EUT is deemed to meet the radiated requirements without actual testing.

6 Test Results I M M U N I T Y

According to the electrical characteristics above and EN IEC 55014-2:2021, the EUT belongs to category II equipment.

“Category II: mains operated equipment containing electronic control circuitry with no clock frequency higher than 15 MHz.”

During the immunity tests, the EUT was operated under conditions specified by clause 3.1 of this report.

Performance criterion A: The apparatus shall continue to operate as intended during the test. No degradation of performance or loss of function is allowed below a performance level (or permissible loss of performance) specified by the manufacturer, when the apparatus is used as intended.

Performance criterion B: The apparatus shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level (or permissible loss of performance) specified by the manufacturer, when the apparatus is used as intended. During the test, degradation of performance is allowed.

Performance criterion C: Temporary loss of function is allowed, provided the function is self-recoverable or can be restored by the operation of the controls, or by any operation specified in the instructions for use.

Date of testing: 2025.03.27-2025.03.28

Room temperature	:	17-21°C
Relative humidity	:	45-58%
Atmospheric pressure	:	102.1kPa

6.1 Enclosure

6.1.1 Electrostatic Discharge

Result:	Pass
----------------	-------------

The immunity against electrostatic discharge was tested in accordance with EN IEC 55014-2:2021. Test setup and ESD-Generator are according to EN 61000-4-2 which is specified by EN IEC 55014-2:2021.

The EUT is placed on 0,1m wood table above the ground plane. And the minimum distance between the EUT and all other conductive structures except the ground plane beneath the EUT is more than 0,5m.

The reference ground plane is an aluminium sheet of 0.25mm minimum thickness. The reference ground plane is connected to the protective earth. The size of the ground plane is 2m × 2m.

A horizontal coupling plane (HCP), 1.6m × 0.8m, is placed on the table and isolated from the EUT and cables by an insulating support 0.5mm thick. Vertical coupling plane (VCP) of dimensions 0.5m × 0.5m is placed parallel to and positioned at a distance of 0.1m from the EUT.

Charge voltage : ±4.0kV (Contact Discharge), ±8.0kV (Air Discharge)
Polarity : positive / negative
Number of discharges : ≥10
Performance criteria : B

Table 6: ESD, Positive / Negative Polarity

Position	Kind of Discharge	Result	Remarks
Nonmetal Enclosure	Air discharge ±8kV	Pass	No disturbance of function
Button	Air discharge ±8kV	Pass	No disturbance of function
Metal Enclosure	Contact discharge ±4kV	Pass	No disturbance of function
Coupling plane (Both HCP and VCP)	Contact discharge ±4kV	Pass	No disturbance of function

6.2 Input and Output AC Power Ports

6.2.1 Fast Transients on AC Power Lines

Result:	Pass
----------------	-------------

The immunity against fast transients on AC power lines was tested in accordance to EN IEC 55014-2:2021. Test setup and the fast transient noise generator are according to EN 61000-4-4 which is specified by EN IEC 55014-2:2021.

The EUT is placed on 0.1m wood table above the ground plane. And the minimum distance between the EUT and all other conductive structures except the ground reference plane is more than 0.5m.

The length between the coupling device and the EUT is less than 1m. The cord length more than 1m, the excess length of the cable shall gathered into a flat coil with a 0,4m diameter, and situated at a distance of 0,1m above the ground reference plane.

The reference ground plane is an aluminium sheet of 0.25mm minimum thickness. The reference ground plane is connected to the protective earth. The size of the ground plane is 2m × 2m.

Test Voltage	: 1kV
Polarity	: negative/positive
Repetition frequency	: 5kHz
Test duration	: ≥120sec
Tr/Tn	: 5ns/50ns
Performance criteria	: B

Table 7: Burst, AC Power lines, Positive and Negative Polarity

Coupling Method: Direct Injection		
Coupling Port	Test Voltage / Result	Remark
AC mains: L1 (L), L2 (N), --	±1000V Pass	No disturbance of function

6.2.2 Injected Current into AC Power Port

Result:	Pass
----------------	-------------

The immunity against injected current into AC power port was tested according to EN IEC 55014-2:2021 in a shielded room. The Test setup and the test generator are according to EN 61000-4-6 which is specified by EN IEC 55014-2:2021.

The EUT is placed on 0,1m wood table above the ground plane. And the minimum distance between the EUT and all other conductive structures except the reference ground plane is more than 0.5m.

The EUT comprised a single unit. The coupling and decoupling networks were inserted on the power supply connection. The coupling and decoupling networks was placed on the ground reference plane, making direct contact with it at about 0.1-0.3 meter from EUT. The cable between EUT and CDN is as short as possible and not bundled nor wrapped. The height of cable between the EUT and the coupling and decoupling networks above the ground reference plane was 50mm.

Voltage Level	: 3V(rms)(unmodulated)
Environmental phenomena	: r.f. current, common mode, 1kHz, 80%AM
Source impedance	: 150 Ω
Frequency range	: 0.15 - 230 MHz
Sweeping rate	: $\leq 1,5 \times 10^{-3}$ decades/s
Performance criteria	: A

Table 8: Injected current, AC Power Port

Coupling Port	Coupling Method:	Result	Remark
AC mains: L1 (L), L2 (N), --	CDN M-2	Pass	No disturbance of function

Prüfbericht - Nr.: CN25BLLG 001
Test Report No.:

Seite 24 von 29
Page 24 of 29

6.2.3 Surges to AC Power Port

Result:

Pass

The immunity against surges to AC power port was tested in accordance to EN IEC 55014-2:2021. Test setup and the Combination Wave Generator (CWG) are according to EN 61000-4-5 which is specified by EN IEC 55014-2:2021.

Open-circuit Test Voltage : 1kV (phase to neutral)
Tr/Tn : 1.2/50µs (open-circuit voltage)
8/20µs (short-circuit current)
Test numbers : 5 positive and 5 negative pulses
Test angle : 90° and 270°
Repetition rate : 1 surge/min
Performance criteria : B

Table 9: Surges to AC Power lines, positive/negative

Line	Tested voltage/coupling phase	Result	Remarks
Phase to neutral	+1.0kV, $+\pi/2$ (5 times)	Pass	No disturbance of function
	-1.0kV, $-\pi/2$ (5 times)	Pass	No disturbance of function

Prüfbericht - Nr.: CN25BLLG 001

Test Report No.:

Seite 25 von 29

Page 25 of 29

6.2.4 Voltage dips and interruptions to AC Power Port

Result:	Pass
----------------	-------------

The immunity against voltage dips and interruptions to AC power port was tested in accordance to EN IEC 55014-2:2021. Test setup and the test generator are according to EN 61000-4-11 which is specified by EN IEC 55014-2:2021. The EUT was placed directly on the table of aluminum.

Performance criteria	: C	
Test level (in % UT) and	: 0	0.5 periods(50Hz)
duration (in periods of the	40	10 periods(50Hz)
rated frequency)	70	25 periods(50Hz)

Table 10: Test condition and Test Result for Voltage dips and Short interruptions

Test level (in % UT)	Duration	Performance criteria	Result	Remarks
0	0.5	C	Pass	No disturbance of function
40	10	C	Pass	During the test, the speed of EUT was changed. After the disturbance ceased, it could be restored.
70	25	C	Pass	

Prüfbericht - Nr.: CN25BLLG 001
Test Report No.:

Seite 26 von 29
Page 26 of 29

7 Photographs of the Test Set-Up

Photograph 1: Set-up for Disturbance Voltage



Photograph 2: Set-up for Disturbance Power




Prüfbericht - Nr.: CN25BLLG 001
Test Report No.:

Seite 27 von 29
Page 27 of 29

Photograph 3: Set-up for ESD




Photograph 4: Set-up for Fast Transient Burst, Surges and Voltage Dips

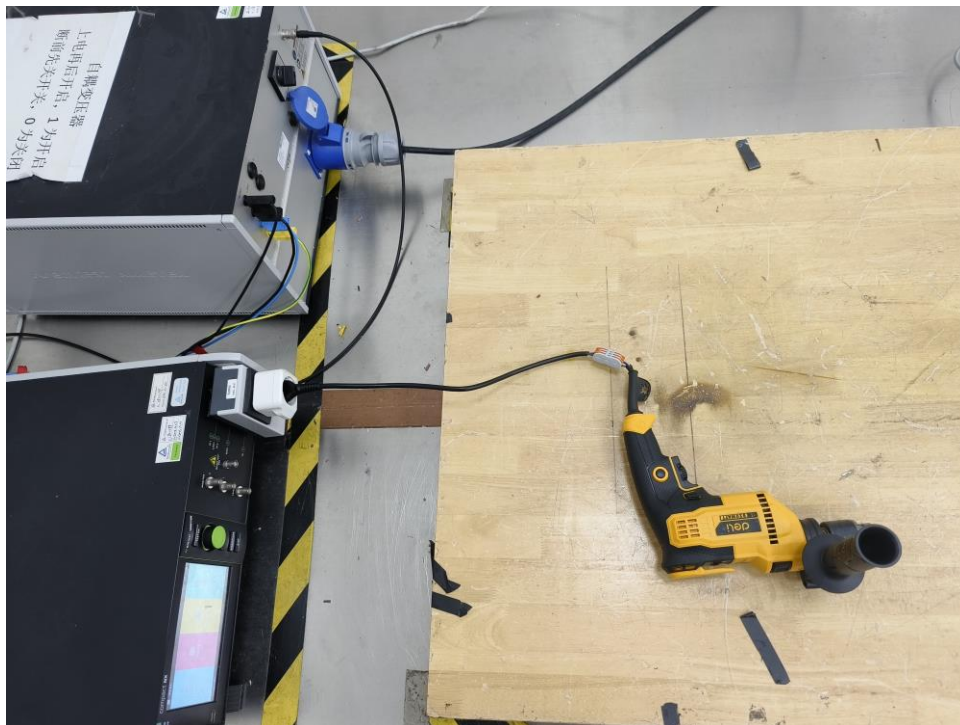

Prüfbericht - Nr.: CN25BLLG 001
Test Report No.:

Seite 28 von 29
Page 28 of 29

Photograph 5: Set-up for Injected Current

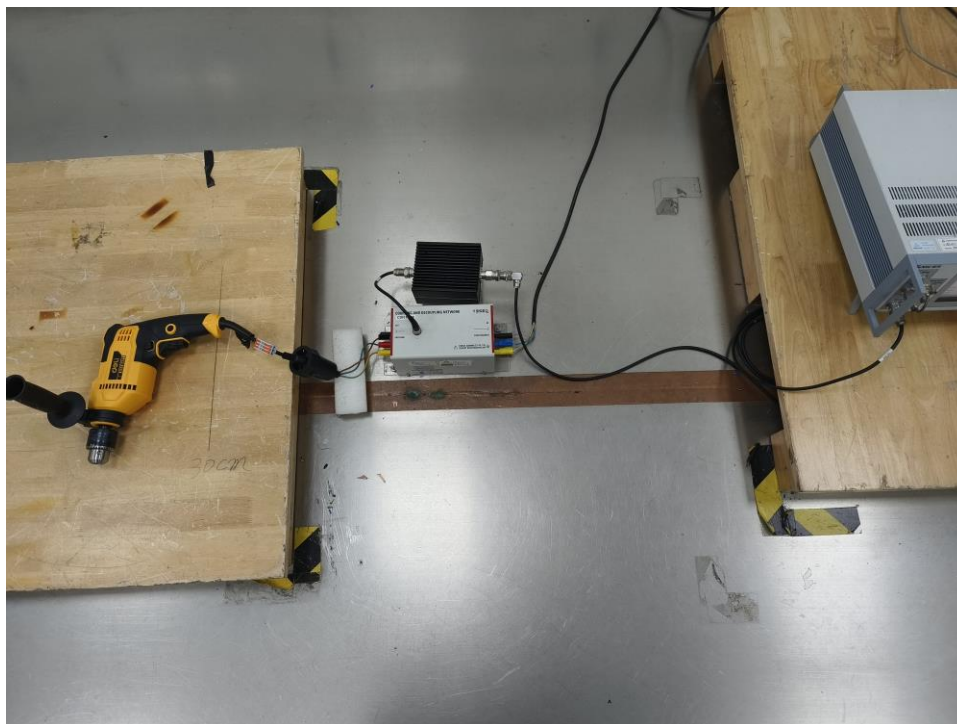

Photograph 6: Set-up for Harmonics, Voltage Fluctuation and flicker



8 List of Tables

Table 1: List of Test and Measurement Equipment of Laboratory A	5
Table 2: List of Test and Measurement Equipment of Laboratory B	5
Table 3: Measurement Uncertainty of Laboratory A	6
Table 4: Harmonic currents measurement results	11
Table 5: Voltage fluctuations and flicker measurement results	12
Table 6: ESD, Positive / Negative Polarity	21
Table 7: Burst, AC Power lines, Positive and Negative Polarity	22
Table 8: Injected current, AC Power Port	23
Table 9: Surges to AC Power lines, positive/negative	24
Table 10: Test condition and Test Result for Voltage dips and Short interruptions	25

9 List of Figures

Figure 1: Spectral Diagrams, Conducted Emission, 150kHz - 30MHz, L	14
Figure 2: Spectral Diagrams, Conducted Emission, 150kHz - 30MHz, N	15
Figure 3: Spectral Diagrams, Power Disturbance, Mains, 30-300MHz	18

10 List of Photographs

Photograph 1: Set-up for Disturbance Voltage	26
Photograph 2: Set-up for Disturbance Power	26
Photograph 3: Set-up for ESD	27
Photograph 4: Set-up for Fast Transient Burst, Surges and Voltage Dips	27
Photograph 5: Set-up for Injected Current	28
Photograph 6: Set-up for Harmonics, Voltage Fluctuation and flicker	28

-- The END --