

<b>Prüfbericht-Nr.:</b> <i>Test report no.:</i>	<b>CN24DJEO 001</b>	<b>Auftrags-Nr.:</b> <i>Order no.:</i>	180291372	Seite 1 von 121 <i>Page 1 of 121</i>			
<b>Kunden-Referenz-Nr.:</b> <i>Client reference no.:</i>	N/A	<b>Auftragsdatum:</b> <i>Order date:</i>	2024.04.15				
<b>Auftraggeber:</b> <i>Client:</i>	Ningbo Deli tools Co., Ltd. No.128, Chezhan West Road, Huangtan Town, NingHai County, Ningbo, 315000 Zhejiang P.R. China						
<b>Prüfgegenstand:</b> <i>Test item:</i>	Electric hammer						
<b>Bezeichnung / Typ-Nr.:</b> <i>Identification / Type no.:</i>	DL-DC26-E1, DL-DC26-E2, DL-DC28-E2, DL-DC28-E3						
<b>Auftrags-Inhalt:</b> <i>Order content:</i>	Type test						
<b>Prüfgrundlage:</b> <i>Test specification:</i>	EN 62841-1:2015+A11 EN IEC 62841-2-6:2020+A11						
<b>Wareneingangsdatum:</b> <i>Date of sample receipt:</i>	2024.04.12						
<b>Prüfmuster-Nr.:</b> <i>Test sample no.:</i>	A003696599-001-008						
<b>Prüfzeitraum:</b> <i>Testing period:</i>	2024.04.17 – 2024.04.29						
<b>Ort der Prüfung:</b> <i>Place of testing:</i>	TÜV Rheinland / CCIC (Ningbo) Co., Ltd.						
<b>Prüflaboratorium:</b> <i>Testing laboratory:</i>	TÜV Rheinland / CCIC (Ningbo) Co., Ltd.						
<b>Prüfergebnis*:</b> <i>Test result*:</i>	Pass						
<b>geprüft von:</b> <i>tested by:</i>	X 		<b>genehmigt von:</b> <i>authorized by:</i>	X 			
<b>Datum:</b> <i>Date:</i>	2024.06.05	Signed by: xustepheng		<b>Ausstellungsdatum:</b> <i>Issue date:</i>	2024.06.05	Signed by: Heqing Huang	
<b>Stellung / Position:</b>	PE			<b>Stellung / Position:</b>	Authorizer		
<b>Sonstiges /</b> <i>Other:</i>	Requirements of EN 62841-1:2015/AC were considered.						
<b>Zustand des Prüfgegenstandes bei Anlieferung:</b> <i>Condition of the test item at delivery:</i>	Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>						
* Legende:	P(ass) = entspricht o.g. Prüfgrundlage(n)	F(ail) = entspricht nicht o.g.	N/A = nicht anwendbar	N/T = nicht			
* Legend:	P(ass) = passed a.m. test	F(ail) = failed a.m. test specification(s)	N/A = not applicable	N/T = not tested			
<b>Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.</b> <i>This test report only relates to the above mentioned test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>							


**Rubberish-Nr.:** CN24DJEO 001  
**Test report no.:**

Absatz Clause	Anforderungen - Prüfungen / Requirements - Tests	Messergebnisse – Bemerkungen/ Measuring results - Remarks	Ergebnis Result
1	<p>Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben.</p> <p>Detaillierte Informationen bezüglich Prüfkonditionen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden.</p> <p><i>The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system.</i></p> <p><i>Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.</i></p>		
2	<p>Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben. Informationen zur Verifizierung der Authentizität unserer Dokumente erhalten Sie auf folgender Webseite: <a href="http://go.tuv.com/digital-signature">go.tuv.com/digital-signature</a></p> <p><i>As contractually agreed, this document has been signed digitally only. TÜV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TÜV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged. For information on verifying the authenticity of our documents, please visit the following website: <a href="http://go.tuv.com/digital-signature">go.tuv.com/digital-signature</a></i></p>		
3	<p>Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben.</p> <p>Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt.</p> <p><i>Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report.</i></p> <p><i>Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.</i></p>		
4	<p>Die Entscheidungsregel für Konformitätserklärungen basierend auf numerischen Messergebnissen in diesem Prüfbericht basiert auf der "Null-Grenzwert-Regel" und der "Einfachen Akzeptanz" gemäß ILAC G8:2019 und IEC Guide 115:2021, es sei denn, in der auf Seite 1 dieses Berichts genannten angewandten Norm ist etwas anderes festgelegt oder vom Kunden gewünscht. Dies bedeutet, dass die Messunsicherheit nicht berücksichtigt wird und daher auch nicht im Prüfbericht angegeben wird. Zu weiteren Informationen bezüglich des Risikos durch diese Entscheidungsregel siehe ILAC G8:2019.</p> <p><i>The decision rule for statements of conformity, based on numerical measurement results, in this test report is based on the "Zero Guard Band Rule" and "Simple Acceptance" in accordance with ILAC G8:2019 and IEC Guide 115:2021, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report. For additional information to the resulting risk based of this decision rule please refer to ILAC G8:2019.</i></p>		

Test Report issued under the responsibility of:



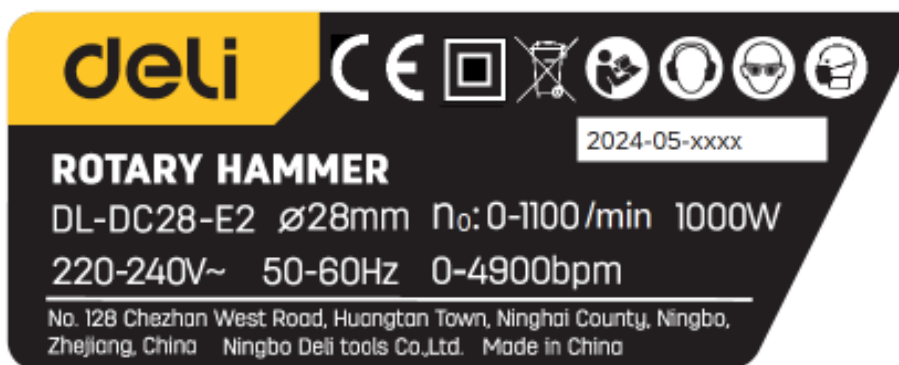
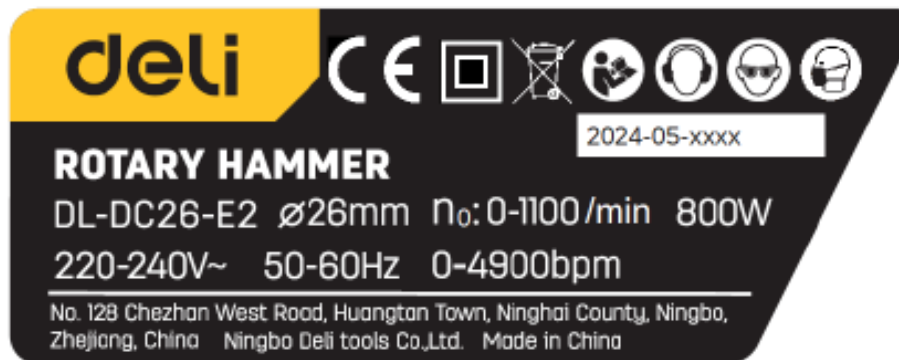
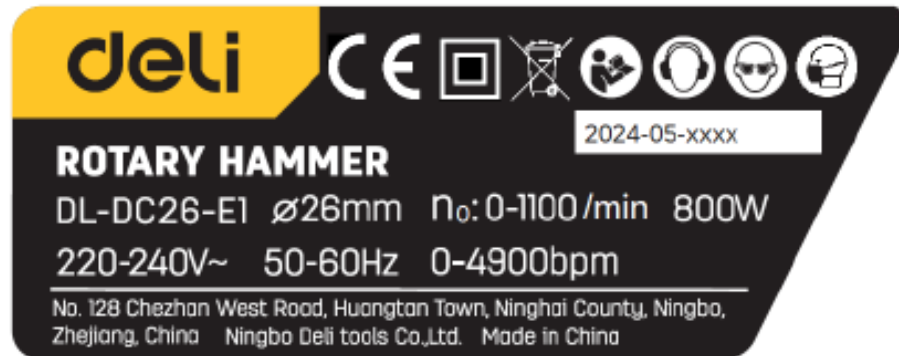
<b>TEST REPORT</b> <b>IEC 62841-2-6</b> <b>Electric motor-operated hand-held tools, transportable tools and lawn and garden machinery</b> <b>- Safety -</b> <b>Part 2-6: Particular requirements for hand-held hammers</b>	
Report Number..... :	See cover page
Date of issue..... :	See cover page
Total number of pages..... :	See cover page
Name of Testing Laboratory preparing the Report..... :	TÜV Rheinland / CCIC (Ningbo) Co., Ltd.
Applicant's name..... :	Ningbo Deli tools Co., Ltd.
Address..... :	No.128, Chezhan West Road, Huangtan Town, Ninghai County, Ningbo, 315000 Zhejiang P.R. China
<b>Test specification:</b>	
Standard..... :	IEC 62841-2-6:2020 for use in conjunction with IEC 62841-1:2014
Test procedure..... :	Type test
Non-standard test method .....	N/A
Test template used..... :	IECEE OD-2020-F1:2021, Ed.1.4
Test Report Form No. .... :	IEC62841_2_6B
Test Report Form(s) Originator.... :	DEKRA Certification B.V.
Master TRF .....	2021-11-18
<b>Copyright © 2021 IEC System of Conformity Assessment Schemes for Electrotechnical Equipment and Components (IECEE System). All rights reserved.</b> This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context. If this Test Report Form is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed. <b>This report is not valid as a CB Test Report unless signed by an approved IECEE Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.</b>	
<b>General disclaimer:</b> The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Issuing NCB. The authenticity of this Test Report and its contents can be verified by contacting the NCB, responsible for this Test Report.	

<b>Test item description..... :</b>	Electric hammer	
<b>Trade Mark..... :</b>		
<b>Manufacturer..... :</b>	Ningbo Deli tools Co., Ltd. No.128, Chezhan West Road, Huangtan Town, Ninghai County, Ningbo, 315000 Zhejiang P.R. China	
<b>Model/Type reference..... :</b>	1) DL-DC26-E1, DL-DC26-E2; 2) DL-DC28-E2, DL-DC28-E3	
<b>Ratings..... :</b>	1) 220-240V~, 50-60Hz, 800W; 2) 220-240V~, 50-60Hz, 1000W	
<b>Responsible Testing Laboratory (as applicable), testing procedure and testing location(s):</b>		
<input checked="" type="checkbox"/>	<b>Testing Laboratory:</b>	TÜV Rheinland / CCIC (Ningbo) Co., Ltd. 3F Building C13, R&D Park, No. 32, Lane 299 Guanghua Road, National Hi-Tech Zone, Ningbo, 315048, P.R. China
	<b>Testing location/ address .....</b>	TÜV Rheinland / CCIC (Ningbo) Co., Ltd. 3F Building C13, R&D Park, No. 32, Lane 299 Guanghua Road, National Hi-Tech Zone, Ningbo, 315048, P.R. China
	<b>Tested by (name, function, signature)..... :</b>	See cover page
	<b>Approved by (name, function, signature):</b>	See cover page
<input type="checkbox"/>	<b>Testing procedure: CTF Stage 1:</b>	
	<b>Testing location/ address .....</b>	
	<b>Tested by (name, function, signature)..... :</b>	
	<b>Approved by (name, function, signature):</b>	
<input type="checkbox"/>	<b>Testing procedure: CTF Stage 2:</b>	
	<b>Testing location/ address .....</b>	
	<b>Tested by (name + signature) .....</b>	
	<b>Witnessed by (name, function, signature):</b>	
	<b>Approved by (name, function, signature):</b>	
<input type="checkbox"/>	<b>Testing procedure: CTF Stage 3:</b>	
<input type="checkbox"/>	<b>Testing procedure: CTF Stage 4:</b>	
	<b>Testing location/ address .....</b>	
	<b>Tested by (name, function, signature)..... :</b>	
	<b>Witnessed by (name, function, signature):</b>	
	<b>Approved by (name, function, signature):</b>	
	<b>Supervised by (name, function, signature):</b>	

<b>List of Attachments (including a total number of pages in each attachment):</b> Attachment 1: Critical component list (3 pages)	
<b>Summary of testing:</b>	
<b>Tests performed (name of test and test clause):</b> All tests were performed on model DL-DC28-E2. Additional tests of clause 10, clause 11, clause 12, clause 14.1, clause 17, clause 18.5.1, clause 19.102, Annex C, Annex D and Annex I were performed on model DL-DC26-E1.	<b>Testing location:</b> TÜV Rheinland / CCIC (Ningbo) Co., Ltd. 3F Building C13, R&D Park, No. 32, Lane 299 Guanghua Road, National Hi-Tech Zone, Ningbo, 315048, P.R. China.
<b>Summary of compliance with National Differences (List of countries addressed):</b> EU Group Differences were additional considered.	
<b>Use of uncertainty of measurement for decisions on conformity (decision rule):</b> See page 2.	
<input type="checkbox"/> No decision rule is specified by the IEC standard, when comparing the measurement result with the applicable limit according to the specification in that standard. The decisions on conformity are made without applying the measurement uncertainty ("simple acceptance" decision rule, previously known as "accuracy method").	
<input type="checkbox"/> Other:... (to be specified, for example when required by the standard or client, or if national accreditation requirements apply)	
<b>Information on uncertainty of measurement:</b> The uncertainties of measurement are calculated by the laboratory based on application of criteria given by OD-5014 for test equipment and application of test methods, decision sheets and operational procedures of IECEE. IEC Guide 115 provides guidance on the application of measurement uncertainty principles and applying the decision rule when reporting test results within IECEE scheme, noting that the reporting of the measurement uncertainty for measurements is not necessary unless required by the test standard or customer. Calculations leading to the reported values are on file with the NCB and testing laboratory that conducted the testing.	

**Copy of marking plate:**

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.



<b>Test item particulars.....:</b>	
<b>Category of equipment .....</b>	Hand held
<b>Protection Class of tool .....</b>	Class II
<b>Method of supply cord attachment .....</b>	Type X
<b>Duty conditions .....</b>	Normal
<b>Type of operation .....</b>	Normal
<b>Degree of protection .....</b>	IPX0
<b>Accessories and detachable parts included .....</b>	Auxiliary handle
<b>Other options included .....</b>	N/A
<b>Classification of installation and use.....:</b>	
<b>Supply Connection.....:</b>	Fixed power cord
<b>Possible test case verdicts:</b>	
- test case does not apply to the test object..... : N/A	
- test object does meet the requirement..... : P (Pass)	
- test object does not meet the requirement..... : F (Fail)	
<b>Testing .....</b>	
<b>Date of receipt of test item .....</b>	See cover page
<b>Date (s) of performance of tests .....</b>	See cover page
<b>General remarks:</b>	
"(See Enclosure #)" refers to additional information appended to the report. "(See appended table)" refers to a table appended to the report.  Throughout this report a <input type="checkbox"/> comma / <input checked="" type="checkbox"/> point is used as the decimal separator.	
<b>Manufacturer's Declaration per sub-clause 4.2.5 of IEC 60335-1:</b>	
The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided.....	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> Not applicable
<b>When differences exist, they shall be identified in the General product information section.</b>	
<b>Name and address of factory (ies).....:</b> Zhejiang Hangbo Power Tools Co., Ltd. No.1255, East Tiayuchang Road, Bantan Industrial Zone, Jiaojiang District Taizhou City, 318000 Zhejiang P.R. China	

**General product information and other remarks:**

This product is designed to be used for drill, hammer drilling or chiselling concrete, rock, brick walls and other similar materials. There are three working modes for this product: drill, rotary hammer and chiselling. Models DL-DC26-E1 and DL-DC26-E2 are same as each other except for the model number. Models DL-DC28-E2 and DL-DC28-E3 are same as each other except for the model number. Models DL-DC26-E1 and DL-DC28-E2 are same except for the motor and TPE covered area of handle.

**Description of Safety Critical Functions (SCF), if any:**

N/A



IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
<b>5</b>	<b>GENERAL CONDITIONS FOR THE TESTS</b>		P
5.1	General test conditions in this clause apply unless otherwise specified in this standard		P
5.2	Tests made on separate samples		P
	At manufacturer's discretion, fewer samples used		N/A
	Cumulative stress from successive tests on electronic circuits avoided		P
	Several tests conducted on a single sample, results not affected by previous tests.		P
5.3	Evident from construction of the tool that a particular test(s) not applicable, test(s) not made..... :		N/A
5.4	Tests carried out with the tool and/or any movable part of it		P
	Tool placed in the most unfavourable position that may occur in normal use.		P
5.5	Tools provided with controls or switching devices and setting can be altered by the user, controls or devices adjusted to their most unfavourable settings		P
	Electronic speed control devices set at their highest speed..... :	Switch with adjusting speed function	P
	Adjusting means accessible without the aid of a tool, this subclause applies whether the setting can be altered by hand or with the aid of a tool		P
	Adjusting means not accessible without the aid of a tool and setting is not intended to be altered by the user, this subclause does not apply		N/A
	Adequate sealing prevents alteration of setting by user		N/A
5.6	Tests conducted in a draught-free location, and unless otherwise specified, in $(20 \pm 5) ^\circ\text{C}$		P
	Tests conducted at $(23 \pm 2) ^\circ\text{C}$ due to temperature limited temperature sensitive device		N/A
5.7.1	Tools for a.c. only, tested with a.c. at rated frequency, if marked		N/A
	Tools marked for a.c./d.c., tested with the most unfavourable supply..... :		N/A
	Tools for a.c. not marked with rated frequency, or marked 50-60 Hz or 50/60 Hz, tested with either 50 Hz or 60 Hz, whichever is the most unfavourable	50-60Hz	P
	Tools with series motors only, either frequency may be used		N/A

IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
5.7.2	Tool rated for more than one rated voltage or a voltage range, tested at the highest voltage (V).... :	220-240V~	P
5.7.3	Tools where there is no marked rated current , tests that require a value for rated current conducted at current measured rated input at the lowest rated voltage or the lower value of the rated voltage range		N/A
5.8	Alternative heating elements or attachments which are made available for the tool by manufacturer, tool is tested with those heating elements or attachments which give the most unfavourable results		N/A
5.9	Tools are tested with the specified flexible supply cord connected to the tool.		P
5.10	Parts of class I tool having accessible parts not connected to an earthing terminal or earthing contact, and not separated from live parts by an intermediate metal part connected to an earthing terminal/contact, were checked on class II construction requirements.		N/A
5.11	Class I tool or class II tool having parts operating at safety extra-low voltage, such parts on requirements specified for class III tools		N/A
5.12	When testing electronic circuits, supply is free from perturbations from external sources that can influence the results of the tests		N/A
5.13	Heating element, if any, cannot be operated unless the motor is running, element is tested with the motor running		N/A
	Heating element, if any, can be operated without the motor running, element is tested with or without the motor running, whichever is the more unfavourable		N/A
	Heating elements incorporated in the tool connected to a separate supply unless otherwise specified		N/A
5.14 M	For attachments performing a function within the scope of IEC 62841-2-6, tests made in accordance with IEC 62841-2-6		P
5.15	Method of torque loading chosen so as to avoid additional stresses, such as by side thrust.		P
	Additional loads necessary for the correct operation of the tool considered..... :	Considered	P
	Brake used for loading, load applied gradually		P
	Modification of output means for purpose of loading permitted to allow connection to brake		P
5.16	Tools intended for SELV tested using a supply transformer intended to be used with the tool.		N/A

IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
5.17	For requirements based on the mass of the tool, the mass is determined without supply cord and without tool bits or accessories, but with all equipment and attachments needed for normal use		P
M	Required accessories, equipment and attachments as given in the IEC 62841-2-6		P
	If tool has more accessories, equipment or attachments heaviest configuration shall be used to determine mass.		P
A	Mass of the tool includes auxiliary handle and all parts of any non-detachable dust extraction device		P
A	A detachable dust extraction device is not included in the mass of the tool		N/A
5.18	For linear and angular dimensions, ISO 2768-1, class "c" applicable, unless tolerances are specified		P
5.19	All electrical measurements made with a maximum measurement error of 5 %.		P
	Instruments for measuring voltage have input resistance $\geq 1 \text{ M}\Omega$ and parallel capacitance $\leq 150 \text{ pF}$ .		P
5.20	Thermal equilibrium considered achieved when the total deviation of three successive temperature readings, taken at 3 min intervals, is $\leq 4 \text{ K}$		P
	Induction motor, measurement time of 1 hour is considered sufficient.		N/A

<b>6</b>	<b>RADIATION, TOXICITY AND SIMILAR HAZARDS</b>		P
6.1	No harmful radiation, no toxic or similar hazard		P
6.2	For tool with laser to indicate a cutting line or the like, laser class 2M or lower according to IEC 60825-1:2007.		N/A
	Tool marked with symbol(s) as in of IEC 60825-1:2007 for the relevant laser class.		N/A
6.3	Tool fitted with non-coherent light sources, users of tools are cautioned as to the risk of potential photo-biological harm, if such harm exist..... :		N/A
6.3.1	Visible light indicators (pilot lamps) and Infrared sources used for signalling and communication considered to have no risk of photo-biological harm, no marking required.		N/A

IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
6.3.2	Tools emitting visible light from electroluminescent, incandescent or LED sources, considered to be for short term, non-general light services use where exposure is both incidental and intermittent		N/A
	Marked with either: – “CAUTION Do not stare at operating lamp”, or – symbol 60417-6041(2010-08)		N/A
	If no reasonable risk of harm, markings may be omitted		N/A
	No reasonable risk of harm considered, as either a) light emission at a distance of 200 mm along any direction of the tool < 500 Lux; or b) luminance light emission < 10 000 cd/m <sup>2</sup> in the range of visible light; or c) light source (if not focused by external optics) is in Risk Group 1 or lower evaluated by the methods of IEC 62471; or d) tool itself evaluated by the methods of IEC 62471 and found to be in Risk Group 1 or lower.		N/A
6.3.3	For light derived by sources other than those mentioned in 6.3.2, product evaluated by the methods of IEC 62471, markings guided by 5.4 of IEC/TR 62471-2:2009.		N/A

<b>7</b>	<b>CLASSIFICATION</b>		P
7.1	Tool is Class I, II, or III with respect to protection against electric shock .....	Class II	P
7.2	Degree of protection against harmful ingress of water per IEC 60529 .....	IPX0	N/A
M	No degree of protection other than IPX0 specified in IEC 62841-2-6		N/A

<b>8</b>	<b>MARKINGS AND INSTRUCTIONS</b>		P
8.1	Tool marked with rated voltage(s) or rated voltage range(s) (V).....	220-240V~	P
	Tool for star-delta connection clearly marked with the two rated voltages (e.g. 230 Δ / 400 Y V) .....	Single phase	N/A
	Tool complying with this standard for a voltage range, may be marked with any single voltage or smaller voltage range within that range (V).....		N/A

IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
	Symbol for nature of supply or rated frequency or frequency range. The symbol for nature of supply placed next to rated voltage (Hz)..... :	~, 50-60Hz	P
	Rated input or current marked (W or A) ..... :	See marking plate	P
	Tool has alternative components to be selected by a control device, rated input or rated current is that corresponding to the highest rated input or rated current		N/A
	Class II symbol for class II tools ..... :	See marking plate	P
	IP number other than IPX0..... :	IPX0	N/A
8.1.1	Tools with range of rated values (e.g. voltage, frequency) can be operated without adjustment over the range, marked with the lower and upper limits of the range separated by a hyphen, e.g. 115-230 V :	See marking plate	P
	Different rated values to be adjusted by the user / installer, tool marked with the these values separated by an oblique stroke, e.g. 115/230 V.... :		N/A
8.1.2	Upper and lower limits of rated power input marked,		N/A
	unless difference between upper and lower limits of rated voltage range do not exceed 20 % of the mean value, in which case the rated input is related to mean value of voltage range.		P
8.2	Tool marked with - "WARNING – To reduce the risk of injury, user must read instruction manual", or - sign M002 of ISO 7010, or - appropriate symbol, see relevant part of IEC 62841-2, IEC 62841-3 or IEC 62841-4	Sign M002 of ISO 7010 used	P
	"WARNING" in capital letters not less than 2,4 mm high, not separated from either the cautionary statement or the symbol ISO 7000-0434A or ISO 7000-0434B		N/A
	Statement verbatim except that "operator's manual" or "user guide" may replace "instruction manual".		N/A
	Additional symbols in accordance with ISO 7010 or designed in accordance with ISO 3864-2/3864-3. :	See marking plate	P
	Cautionary statements having the same signal word such as "WARNING" may be combined into one paragraph under one signal word		N/A
M	Order of statements: markings required by Part 1, markings required by IEC 62841-2-6 and then any optional markings		P

IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
8.3	Business name and address of manufacturer, at least country or state, city and postal code..... :	See marking plate	P
	Business name and address of authorized representative, at least country or state, city and postal code .....	See marking plate	P
	Designation of the tool (may be coded)..... :	See marking plate	P
	Designation coded, code explained in the instructions		N/A
	Designation of series or type .....	See marking plate	P
	Year of manufacture and a date code identifying at least the month of manufacture..... :	See marking plate	P
	Tools parts shipped separately for assembly by the end user, each part marked for identification on the part or the package		N/A
	"> 25 kg" if the mass of the tool is over 25 kg		N/A
	No misunderstanding through additional markings		P
8.4	Markings of 8.1 to 8.3 not on detachable part of the tool		P
	Markings of 8.2 and 8.3 clearly discernible from outside the tool		P
	Markings other than symbols, fold-over label on power cords used (Y or Z attachments only)		N/A
	Other markings may be visible after removing cover		N/A
	Indications for switches and controls placed on or in vicinity of components		P
	Not placed on parts which can be repositioned		P
	Not positioned such that the marking is misleading		P
8.5	Tool can be adjusted to suit different rated voltages, change in voltage clearly discernible		
	Correct Wiring diagram fixed to tool, may be on inside of a cover but not on a label loosely attached to the tool		
8.6	Use of correct units		P
	Use of correct symbols		P
	Additional symbols explained in the instructions, no misunderstanding		P
	Other units and their symbols belong to the international standardized system.		P
	Other units and their symbols same as international standardised system..... :		N/A

IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
8.7	Connection diagram affixed to tool with more than two supply conductors, unless terminals clearly identified		N/A
	The earthing conductor not a supply conductor		N/A
	Wiring diagram indicates how the windings are to be connected for tools for star-delta connection		N/A
8.8	Terminals, except for type Z attachments, marked on non-removable part with specified symbols:		—
	- Terminal exclusively for neutral connection marked with "N"		N/A
	- Earthing terminal marked with symbol IEC 60417-5019 (2006-08)		N/A
	The markings not placed on screws, removable washers or other parts which might be removed		N/A
8.9	Switches which may result in a hazard marked or placed to indicate which part of tool they control... :	Switch is obvious to user	P
8.10	"Off" position of multi stable power switch indicated by figure O (symbol of IEC 60417-5008 [2002-10])		N/A
	A momentary power switch which can be locked in the "on" position is not considered as a multi -stable switch.		P
	Push-buttons for "off" function only, figure O used, button coloured red or black ..... :		N/A
	Figure O not used for any other indication		N/A
	Transportable tools, power switch actuator or cover not coloured yellow and red as specified for emergency stop according to ISO 13850.		N/A
	Flap/cover covers only the start button, colour of the flap/cover not black, red or yellow..... :		N/A
	Flap/cover covers only the stop button, colour of the flap/cover red or yellow..... :		N/A
8.11	Control devices adjusted during operation and the like provided with markings as specified, unless...		N/A
	... fully "on" position opposite to "off" position	Switch with adjusting speed function	P
	Figures used for different positions with O for "off" position, and figures reflecting greater output for other positions ..... :		N/A
	Indication for different positions placed on the device itself, or adjacent to the operating means		N/A
8.12	Markings easily legible		P

IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
	Markings withstood durability test: - 15 s with water soaked cloth - 15 s with petroleum spirit soaked cloth		P
	Signs are in contrast to their background, clearly legible from a distance of not less than 500 mm		P
	Effect of normal use taken into account		P
	Adhesive backing durable, meets requirements of UL 969 or...		P
	... withstands specified tests	See tables 8.12 A - D	N/A
8.13	Thermal link or fuse-link, reference number or other means for identifying the link marked		N/A
8.14	Instruction manual and safety instructions: - are provided together with the tool		P
	- are noticed by the user when the tool is removed from the packaging		P
	- include an explanation of the symbols		P
	- are written in the official language(s) of the country in which the tool is sold.....:	English	P
	- are legible and contrast with the background.		P
	- include business name and address of the manufacturer and, where applicable, his authorised representative.....:	Considered in manual	P
M	- include the designation of the tool and series or type as required by 8.3, including description of machine such as "rotary hammer", "percussion hammer" etc. ....:	Considered in manual	P
8.14.1	Safety instructions in English are verbatim and in any other official language are equivalent .....		P
	The general power tool safety warnings may be separate from the instruction manual.	The general power tool safety warnings included in manual	N/A
	Term "tool" or "power tool" not used for garden machinery; use term such as "machine"		N/A
	Format of all Safety Warnings differentiate the context of all clauses by font or similar means and as illustrated in 8.14.1.1		P
8.14.1 A	Additional safety instructions as specified in 8.14.1.101 are given		P
	Additional safety instructions printed together with or separately from the "General Power Tool Safety Warnings" .....	Additional safety instructions printed together with "General Power Tool Safety Warnings"	P
8.14.1.1	General Power Tool Safety Warnings		P



IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
	1) Work Area Safety		P
	2) Electrical Safety		P
	3) Personal Safety		P
	4) Power Tool Use and Care		P
	5) Service		P
8.14.1.101 A	Hammer safety warnings complete		P
	1) Safety instructions for all operations		P
	2) Safety instructions when using long drill bits with rotary hammers		P
8.14.1.2 M	Order of the Safety Instructions in accordance with A): Part 1 warnings are followed by the relevant part of IEC 62841-2-6 warnings, or ...		P
M	B): IEC 62841-1 warnings and IEC 62841-2-6 warnings divided into the sections defined by the numbered subtitles and the associated warnings below the numbered subtitle		N/A
M	Format of instruction manual section titles for IEC 62841-2-6 warnings		N/A
M	C): Any additional warnings deemed necessary by the manufacturer, not inserted within any of the IEC 62841-2-6 warnings		P
8.14.1.3	Instruction manual and safety instructions in one common document, or		P
	Warning as specified included in manual		P
8.14.2	Additional instructions and information		P
	a) Instructions for putting into use		P
	b) Operating instructions		P
	c) Maintenance and servicing instructions		P
	d) Warnings and instructions for tools with a liquid system	No liquid system	N/A
101) A	For tools with a maximum output torque > 100 Nm as per clause 19.102: instructions on how to brace the tool		N/A
102) A	Instructions for assembling any attachments supplied with the tool		P
103) A	For tools provided with a dust extraction device: instruction on how to collect the dust		N/A

IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
104) A	For tools with detachable dust collection device: information on which dust collection device may be used		N/A
8.14.3	Information about the mass or weight of the tool, if any, is the mass specified in 5.17.		P

<b>9</b>	<b>PROTECTION AGAINST ACCESS TO LIVE PARTS</b>		P
9.1	Tools so constructed and enclosed that there is adequate protection against accidental contact with live parts, even after removal of detachable parts and soft materials		P
9.2	Accessible part not considered live if it is:		N/A
	- supplied with SELV		N/A
	- or separated from live parts by protective impedance, d.c. current not exceeding 2 mA		N/A
	- or separated from live parts by protective impedance, a.c. peak value not exceeding 0.7 mA		N/A
	- for peak value 42.4 V up to and including 450 V capacitance not exceeding 0.1 $\mu$ F		N/A
	- for peak value 450 V up to and including 15 kV discharge not exceeding 45 $\mu$ F		N/A
9.3	Lamps located behind a detachable cover are not removed		N/A
	Protection against contact with live parts of the lamp cap ensured during insertion or removal of lamps located behind a detachable cover		N/A
	Test probe B of IEC 61032:1997 applied with a force of $\leq 5$ N		P
	Opening does not allow entry of test probe B of IEC 61032:1997, rigid test probe applied with a force of 20 N		P
	Test with probe B of IEC 61032:1997 repeated		P
	Test probe does not touch live parts or live parts protected only by lacquer, enamel, ordinary paper, cotton, oxide film, beads or sealing compound		P
9.4	Test probe 13 of IEC 61032:1997 applied with a force $\leq 5$ N through openings in class II tools and class II constructions		P
	Exception: openings giving access to lamp caps and live parts in socket-outlets		N/A

IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
	Test probe is also applied through openings in earthed metal enclosures having a non-conductive coating such as enamel or lacquer.		N/A
	Not be possible to touch live parts with the test probe		P
9.5	Class II tools and class II constructions, adequate protection against accidental contact with basic insulation and metal parts separated from live parts by basic insulation only		P
	Parts not separated from live parts by double or reinforced insulation are not accessible		P
	Probe B of IEC 61032:1997 cannot contact basic insulation through openings in Class II tools or Class II constructions		P

<b>10</b>	<b>STARTING</b>		P
10.1	Motors start under normal voltage conditions		P
	Starting ten times at 0.85 times rated voltage without load (V) .....	187.0V	P
	Starting ten times at 1.1 times rated voltage without load (V) .....	264.0V	P
	Tool operated and overload protection devices incorporated in the tool did not activate.		P
	Centrifugal and other automatic starting switches operate reliably and without contact chattering	No such device	N/A
10.2	Input current drawn at (2,0 ±0,2) s after starting does not exceed 30 A...	For DL-DC26-E1: 2.68A For DL-DC28-E2: 3.94A	P
	... or 4 times the rated current of the tool		N/A

<b>11</b>	<b>INPUT AND CURRENT</b>		P
	Marked power input or current is at least 110% of measured no-load input or current .....	See Table 11	P
	Tool marked with more than one rated voltage, test made at each rated voltage .....		N/A
	Tools marked with one or more rated voltage ranges, test made at both the upper and lower limits of the ranges .....	220-240V~, 50-60Hz	P
	Marking of the rated input is related to the mean value of the relevant voltage range, test is made at a voltage equal to the mean value of that range.....	Considered	P

IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
<b>12</b>	<b>HEATING</b>		P
12.1	No excessive temperatures attained at rated input or rated current..... :	See Table 12	P
	Temperature rise determined according to Clauses 12.2 to 12.5		P
	Test of Clause C.3 at 1,06 times the rated voltage under heated conditions	See Table C.3A	P
12.2	Tool is operated at each rated voltage; load conditions as specified in 12.2.1; torque applied is measured and maintained; voltage is then adjusted to 0,94 times and 1,06 times the rated voltage		N/A
	Tool with a rated voltage range is operated at - the lower limit of the rated voltage range; conditions as specified in 12.2.1; torque applied is measured and maintained; voltage is then adjusted to 0,94 times the lower limit of the rated voltage range - the upper limit of the rated voltage range; conditions as specified in 12.2.1; torque applied is measured and maintained; voltage is then adjusted to 1,06 times the upper limit of the rated voltage range		P
	Temperatures are measured at the most unfavourable of the voltage settings used		P
	Temperatures measured by means of thermocouples are taken while the tool is operating		P
12.2.1 R	The tool is operated intermittently for 30 cycles or ...	Operated for 30 cycles	P
R	... until thermal equilibrium is reached, whichever is achieved first		N/A
R	Cycles of 30 s continuous operation of and 90 s rest period		P
R	Tool loaded to attain rated input or rated current		P
12.3.1	Heating elements, if any, are operated under the conditions specified in Clause 11 of IEC 60335-1:2010; tool was operated at 1,06 times the rated voltage		N/A
12.3.2	Tool provided with automatic cord reel, one third of the total length of the cord was unreeled		N/A
12.3.2	Temperature rise was determined near to the hub of the reel and between the two outermost layers of the cord on the reel		N/A

IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
	Cord storage devices, other than automatic cord reels, intended to accommodate the supply cord partially while the tool is in operation, 50 cm of the cord is unwound		N/A
	The temperature rise of the stored part of the cord is determined at the most unfavourable place.		N/A
12.4	Temperature rises, other than those of windings, determined using thermocouples chosen and positioned to have the minimum effect on the temperature of the part tested		P
	Temperature rise of electrical insulation, other than windings, measured on surface of insulation		P
	When possible, temperature rises of windings determined by resistance method		P
	For handles, knobs, grips and the like, all parts considered which are gripped in normal use, and, if of insulating material, to those parts in contact with hot metal		P
12.5	Temperature rises did not exceed values in Tables 1a and 1b, except as allowed by 12.6		P
	Protective devices did not operate		N/A
	Sealing compounds did not flow		N/A
A	Temperature-rise limit for the external enclosure applicable to the enclosure of the impact mechanism		P
12.6	When winding temperatures exceeded values in Table 1, three additional samples successfully subjected to following tests:		N/A
	a) Heat treatment for 240 h at the specified cabinet temperature (°C): ..... :		N/A
	b) No interturn short circuit after oven treatment		N/A
	c) Humidity treatment in accordance with 14.1		N/A
	d) Tests of Annex D ..... :	See Table D.2	N/A

<b>13</b>	<b>RESISTANCE TO HEAT AND FIRE</b>		<b>P</b>
13.1	Relevant parts sufficiently resistant to distortion due to heat		P
	Parts of thermoplastic material: - provided as enclosure to comply with Clause 9, - supporting current carrying parts, - providing supplementary or reinforced insulation, sufficiently resistant to distortion due to heat		P

IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
	Relevant parts subjected to ball-pressure test acc. to IEC 60695-10-2	See Table 13.1	P
13.2	Part of non-metallic material, except as listed in this clause, resistant to ignition and spread of fire		P
	Parts of non-metallic material other than - material classified at least HB40 per IEC 60695-11-10:2013, provided test sample not thicker than relevant part, - material with a glow wire ignition temperature of at least 575 °C per IEC 60695-2-13:2010, provided that the test sample was no thicker than the relevant part, comply with glow-wire test of IEC 60695-2-11:2000 at 550 °C	See Table 13.2	P
	Soft, foamy, and similar materials which cannot be subjected to glow wire test complies with ISO 9772:2012 for category HBF material with test sample not thicker than relevant part		N/A

<b>14</b>	<b>MOISTURE RESISTANCE</b>		P
14.1	Tools are proof against likely humid conditions		P
	Tool subjected to humidity treatment test for 48 h		P
	Relative humidity (93 ± 2) %..... :	91-94%	P
	Temperature (20...30 °C) maintained at ± 1K..... :	21.5~23.8°C	P
	Samples pre-conditioned to between t and t + 4 °C:		P
	No excessive leakage after humidity treatment .... :	See Table C.2A	P
	No flashover or breakdown occurred during test of Annex D after humidity treatment ..... :	See Table D.2	P
	No flashover or breakdown occurred during additional test of D.2 between accessible metal parts and supply cord wrapped with metal foil..... :	See Table D.2	P
14.2	Degree of protection for tool enclosure according to tool classification (IP Code)..... :		N/A
14.2.1	Tool not connected to the supply and turned continuously through most unfavourable positions		N/A
	Removable parts are removed and subjected to the relevant treatment with the main part..... :		N/A
14.2.2	Tool rated IPX1 through IPX7 subjected to applicable tests of IEC 60529:2013		N/A
	For IPX7 test, tool immersed in water containing 1,0 % NaCl		N/A
	Tool withstood electric strength test of Annex D after moisture treatment	See Table D.2	N/A

IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
	No trace of water on insulation causing reduction of creepage and clearance below values in 28.1		N/A
14.3	No increased risk of electrical shock from liquid systems or spillage of liquid		N/A
	Residual current device is disabled		N/A
	Removable parts, except those fulfilling the test of 21.22., are removed		N/A
	Tool prepared as described in 8.14.2		N/A
	Liquid container filled, then 15% or 0,25 l added.....:		N/A
	Detachable liquid container mounted and dismantled 10 times		N/A
	No excessive leakage .....:	See Table C.3B	N/A
	No flashover or breakdown occurred during test of D.2 between live parts and accessible parts after drying for 24 h at ambient temperature.....:	See Table D.2A	N/A
14.4	No increased risk of electrical shock from liquid systems under pressure during operation		N/A
	Residual current device is disabled		N/A
	Liquid system is subject to a hydrostatic pressure equal to twice the pressure stated in 8.14.2 d) 1) is applied for 1 h with 1,0 % NaCl solution		N/A
	Tool did not exceed maximum allowable leakage current during pressure application	See Table C.2B	N/A
	No flashover or breakdown occurred during test of D.2 between live parts and accessible parts after drying for 24 h at ambient temperature.....:	See Table D.2	N/A
14.5	Residual current devices complied with IEC 61540:1999 and met requirements a) to c)		N/A
	a) RCD disconnected only both mains conductors when leakage exceeded 10 mA with a maximum response of 300 ms		N/A
	Test conducted according to 9.9.2 of IEC 61540:1999, and earthing conductor stayed connected		N/A
	b) RCD operated correctly for all 50 cycles		N/A
	c) RCD cannot be removed during use or routine normal maintenance (i.e., residual current device fixed to tool or power supply cord connected to tool)		N/A
	RCD fitted in supply cord provided with Type Y or Z attachment for connection to supply cord and interconnection cord		N/A

IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
<b>15</b>	<b>RESISTANCE TO RUSTING</b>		P
15.1	Ferrous parts adequately protected against rusting		P
	Parts used to conduct electricity subjected to test. :		—
M	Any mechanical parts mechanical parts subjected to test..... :		—
	All grease removed from the parts to be tested by immersing them in a degreasing agent for 10 min		N/A
	Parts were immersed for 10 min in a 10 % solution of ammonium chloride in water at $(20 \pm 5) ^\circ\text{C}$		N/A
	Without drying, all drops shaken off, and parts placed for 10 min in a box containing air saturated with moisture at $(20 \pm 5) ^\circ\text{C}$		N/A
	After parts dried for 10 min in a heating cabinet at $(100 \pm 5) ^\circ\text{C}$ , no evidence of rust on surfaces		N/A
	Small helical springs and the like and parts exposed to abrasion covered by a layer of grease		N/A

<b>16</b>	<b>OVERLOAD PROTECTION OF TRANSFORMERS AND ASSOCIATED CIRCUITS</b>		N/A
16.1	No excessive temperatures occurred during short circuit in transformer or circuits associated with it for a tool supplied from a transformer ..... :	See Table 16.1	N/A
	Insulation on conductors of SELV circuits was within 15 K of Table 1		N/A
	Temperature of transformer windings did not exceed values in Table 3		N/A
	Transformer complies with IEC 61558-1		N/A
	Power limited by (short-circuit protective device) .. :		—

<b>17</b>	<b>ENDURANCE</b>		P
17.1	Construction prevents electrical or mechanical failures that might impair compliance with this standard.		P
	Insulation not damaged		P
	Connections did not work loose		P
	Overload protection devices did not activate	No such device	N/A
	No flashover or breakdown occurred during test of Annex D, test voltages reduced to 75 per cent, after tests of 17.2 and 17.3	See Table D.2	P



IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
17.2	Rotary hammers with "drill only mode" are operated with no load for 12 h at 1,1 times (highest) rated voltage and for 12 h at 0,9 times (lowest) rated voltage		P
R	Speed is adjusted to the highest value of the highest range		P
R	100s "on" and 20s "off"		P
R	Three different positions		P
R	4h for each position		P
R	All hammers are mounted vertically in a test apparatus (Figure 101), and are operated for four periods of 6 h each at rated voltage		P
R	For rotary hammers with drill only mode, the impact mechanism is engaged		P
R	The hammers are operated intermittently 30s "on" and 90s "off"		P
R	Servicing of carbon brushes and lubricant		P
R	Replacement of impact mechanism is allowed		N/A
R	Forced cooling is allowed if temperature rise of any part of the tool exceeds the temperature rise determined during the test of 12.1		N/A
R	No operation of overload protection devices		N/A
17.3	Tools with Centrifugal switches operated for 10,000 cycles	No such switch	N/A
	Number of operations under normal load .....		N/A
	Rate of operations (s "on", s "off") .....		N/A
	Test voltage 0.9 x rated Voltage (V) .....		N/A

<b>18</b>	<b>ABNORMAL OPERATION</b>		P
18.1	Risk of fire and mechanical damage impairing - safety and - the protection against electric shock as a result of abnormal operation is obviated as far as is practicable.		P
18.1.1	Tool did not emit flames or molten metal		P
	Compliance with Clause 9 maintained		P
	No flashover or breakdown occurred during test of Annex D between live parts and accessible parts after tests of clause 18	See Table D.2	P

IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
	Tool still operable and continues to comply with 19.1 but without repeating the tests of Clause 20		P
18.2	Fuses, thermal cut-outs, overcurrent protection devices used to provide the necessary protection		N/A
	Electronic circuits relied upon for protection evaluated for this safety critical function as in clause 18.8.		N/A
18.3	Tool with series motor operated without accessories at no load for 1 min at 1,3 times rated voltage, or upper limit of voltage range (V) .....	312.0V~	—
	No parts were ejected from the tool		P
	Speed limiting device operated	No such device	—
18.4	Tools with multiphase motor tested, started from cold, with one phase disconnected, and under the torque produced while operated at rated voltage or the mean value of the rated voltage range with rated input or rated current - for 30 s tests for tool kept switched on by hand or continuously loaded by hand - for 5 min test for other tools .....		N/A
	30 s tests for tool kept switched on by hand or continuously loaded by hand		N/A
	5 min test for other tools .....		N/A
	After the test, or at the instant of operation of fuses, thermal cut-outs, motor protection devices and the like, the temperature of the windings complied with the limits in Table 3		N/A
	Max winding temperature recorded (°C).....		—
18.5	Class I tool with class II construction and class II tool subjected to running overload conditions		P
	Tools with series motor, test of 18.5.1		P
	Class I tool with class II armature test of 18.5.2 instead of 18.5.1		N/A
	Tool with electronically commutated stator windings, test 18.5.4		N/A
	Tool with other motor, test of 18.5.3		N/A
	Lawn and garden machinery, test as specified in relevant part of IEC 62841-4.....		N/A
18.5.1	All fuses, thermal cut-outs, overload protectors and the like that are accessible or can be reset by the user without the aid of a tool and any self-resetting protective devices were shorted		N/A

IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
	Functions of electronic circuits that prevent the tool from operating at 160 % rated current disabled ... :		N/A
	Functions of electronic circuits that prevent the tool from operating at 160 % rated evaluated as safety critical functions as in 18.8. .... :		N/A
	Test circuit minimum 12 kVA ..... :	Considered	P
	Leakage current between live parts and accessible parts measured as in Clause C.3 did not exceed 2 mA throughout the test and until stabilization afterwards..... :	See Table C.3C	P
	Tool operated for 15 min, or until the tool open-circuited, or flame appeared ..... :	Until the tool open-circuited	P
	160% rated test current (A) ..... :	For DL-DC26-E1: 6.221A For DL-DC28-E2: 7.883A	—
	Tool operated at rated voltage (V) ..... :	240.0V~	—
	Overload condition existed for (_min, _sec)..... :	For DL-DC26-E1: 8min, 23sec. For DL-DC28-E2: 7min, 14sec.	—
	Condition continued until the tool open-circuited, or flame appeared or 15 minutes expired..... :	Until the tool open-circuited	P
	Elements that opened in case an open circuit occurred ..... :	Open-circuited for stator winding	P
	When flames appeared, extinguished by CO <sub>2</sub> extinguisher	No flame appeared	N/A
	Tool did not operate after 15 min, cooled to ambient temperature and subjected to test of D.2 at 1500 V between live parts and accessible parts	See Table D.2	P
	Tool still operated after 15 min, cooled to ambient temperature and subjected to test of D.2 at 2500 V between live parts and accessible parts	See Table D.2	N/A
	Tool permanently open-circuited due to over temperature condition (except opening of a motor winding), test repeated.		N/A
	Non-self-resetting thermal limit function of an electronic circuit bypassed or evaluated as a safety critical function in 18.8.		N/A
	Tool permanently open-circuited for reasons other than above, the cause is determined and bypassed in a new sample, test repeated		N/A
18.5.2	Test circuit minimum 12 kVA applied to armature. :		N/A

IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
	Leakage current between commutator segments and the armature shaft measured did not exceed 2 mA throughout the test and until stabilization afterwards..... :		N/A
	1,06 times rated voltage (V) applied between opposite commutator segments ..... :		—
	160% rated test current (A) ..... :		—
	Current applied for 15 min, or until the armature open-circuited, or flame appeared ..... :		N/A
	When flames appeared, extinguished by CO <sub>2</sub> extinguisher		N/A
	Armature cooled to ambient temperature and subjected to test of D.2 at 1500 V between commutator segments and the armature shaft	See Table D.2	N/A
18.5.3	Test circuit minimum 12 kVA ..... :		N/A
	Tool stalled, capacitors in circuit of auxiliary windings are open-circuited		N/A
	Test repeated with capacitors short-circuited one at a time unless they are of class P2 of IEC 60252-1		N/A
	Operated at rated voltage (V)..... :		—
	Test duration (min, s) ..... :		—
	Temperature of the windings did not exceed the relevant value specified in Table 3		N/A
	Conditions of 18.1.1 fulfilled		N/A
18.5.4	Motors with electronically commutated stator windings, all possible static faults of the outputs of the motor drive circuitry considered		N/A
	Protective function prevent these faults evaluated as an SCF according to 18.8 with minimum PL = a... :		N/A
	All fuses, thermal cut-outs, overload protectors and the like that are accessible or can be reset by the user without the aid of a tool and any self-resetting protective devices were shorted		N/A
	Leakage current between live parts and accessible parts measured as in Clause C.3 did not exceed 2 mA throughout the test and until stabilization afterwards..... :	See Table C.3D	N/A
	Voltage applied for 15 min, or until the armature open-circuited, or flame appeared ..... :		N/A
	Source voltage of the motor drive circuitry ..... :		N/A
	When flames appeared, extinguished by CO <sub>2</sub> extinguisher		N/A

IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
	Any motor windings open-circuited after 15 min, motor cooled to ambient temperature and subjected to test of D.2 at 1500 V between live parts and accessible parts	See Table D.2	N/A
	No motor windings open-circuited after 15 min, motor cooled to ambient temperature and subjected to test of D.2 at 2500 V between live parts and accessible parts	See Table D.2	N/A
18.6	No hazards from electric shock, fire or accessible moving parts occurred under fault conditions of 18.6.1		N/A
	Tool operated at rated voltage (V) ..... :		—
	No charring or burning of the gauze or tissue paper occurred		N/A
	Protection against electric shock as in Clause 9 maintained		N/A
	Protection against accessibility to moving parts as in 19.1 maintained		N/A
	Evaluation not performed for low power circuits as in Annex H if no SCF can be lost ..... :		N/A
	Circuit encapsulated with an insulating material with a minimum thickness of 0,5 mm and no SCF can be lost, circuit evaluated by open-circuiting and short-circuiting within the encapsulated circuit..... :		N/A
	Fuses, thermal cut-outs, thermal links, temperature limiters, electronic devices or any components or conductors operated, and		N/A
	– test repeated twice, using two more samples; or		N/A
	– tool withstands test of 18.6.1 with the fuse, thermal cut-out or thermal link bridged; or		N/A
	–miniature fuse link complying with IEC 60127 operates and tool withstands test of 18.6.2		N/A
	Tool withstood the particular test as a conductor of a PCB open-circuited, and		N/A
	– creepage or clearances between live parts and accessible metal parts not reduced below values in 28 due to loosened conductors, and		N/A
	– tool withstood repeated tests with the open-circuited conductor bridged, or		N/A
	– test repeated twice, using two more samples		N/A
18.6.1	Fault conditions a) to f) conducted as applicable	See Table 18.6.1	N/A

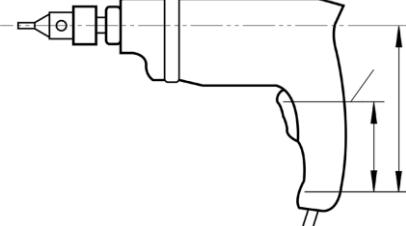
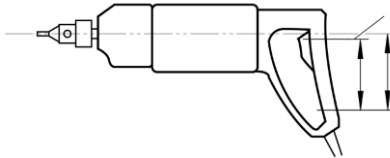
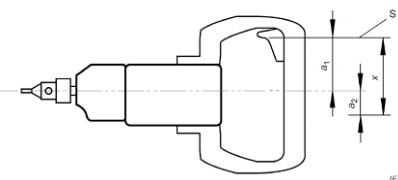
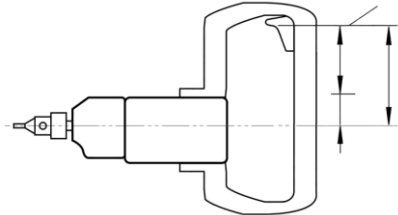
IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
18.6.2	Tests repeated with fuse-link replaced by an ammeter when during fault conditions of 18.6.1, safety of the tool depended on operation of a miniature fuse-link complying with IEC 60127-3,		N/A
	– Circuit not considered to be adequately protected when current measured was $\leq 2.1$ times the rated current of fuse-link, and test conducted with fuse-link short-circuited (A)..... :		N/A
	– Circuit considered adequately protected when current measured was $\geq 2.75$ times the rated current of fuse-link (A) ..... :		N/A
	– Fuse-link short-circuited when current measured was 2.1-2.75 times the rated current of fuse-link, and test conducted as follows (A)..... :		N/A
18.7	Switches and devices for motor reversal withstood stresses occurring when rotation reversed 25 times under running conditions at rated voltage at no-load (V)..... :	240.0V~	P
18.8	<b>Electronic circuits providing safety critical functions (SCF)</b>		—
18.8.1	Electronic circuits providing SCF are reliable and not susceptible to loss of SCF due to electro-magnetic environmental stresses		N/A
	No SCF lost after tests of 18.8.2 to 18.8.6 for circuits with no internal clock frequency or oscillator frequency > 15 MHz		N/A
	No SCF lost after tests of 18.8.2 to 18.8.7 for other electronic circuits		N/A
	Test voltage was rated voltage or the mean value of the rated voltage range..... :		N/A
	Difference between upper and lower limit of rated voltage range > 20 % of its mean value, test at both upper and lower limits of the rated voltage range.. :		N/A
	After evaluation using 18.6.1, no loss of any SCF or tool in a safe state under any present fault condition.		N/A
	Concept of 18.6.1 not appropriate, reliability evaluated using ISO 13849-1.		N/A
	Required performance levels ..... :	See Table 18.8.1A	N/A
	If only MTTF <sub>d</sub> is applied to achieve the required PL: MTTF <sub>d</sub> is 5/20/50 years for PL = a/b/c		N/A
	Software used in circuits of programmable devices whose failure would create loss of safety critical function, complied with software class B requirements as in H.11.12.3 of IEC 60730-1:2010	See Table 18.8.1B	N/A

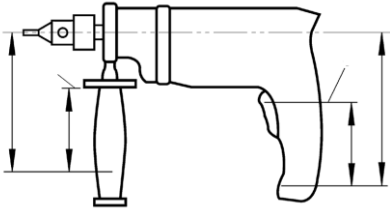
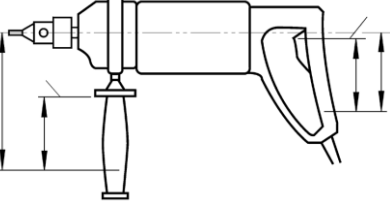
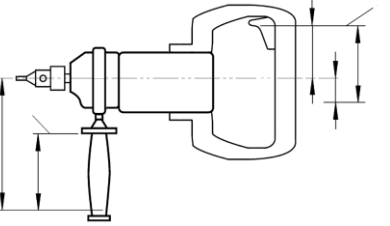
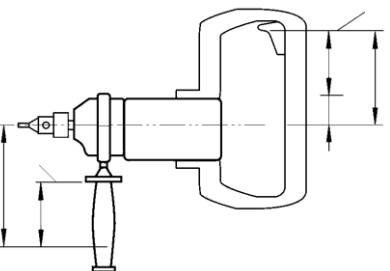
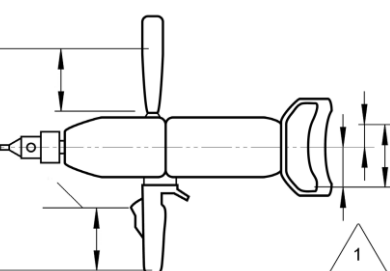
IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
	In the case where software class B is realized by single channel with periodic self-test, an acceptable period is regarded as either after each activation of the power switch or a maximum of 5 min.		N/A
	Class B realized by single channel, periodic self-test either after each activation of the power switch or at least every maximum 5 min		N/A
	H.11.12.3.4.1 applicable for SCF with a $PL \geq c$		N/A
18.8.2	Electrostatic discharges as in IEC 61000-4-2:2008 applied to tool, test level 4 used for air discharge and test level 3 for contact discharge, ten / ten discharges having a positive / negative polarity applied		N/A
18.8.3	Fast transient bursts as in IEC 61000-4-4:2012 applied to tool, test level 3 used. Repetition frequency 5 kHz for 2 min / 2 min with a positive / negative polarity		N/A
18.8.4	Voltage surges as in IEC 61000-4-5:2005 applied to power supply terminals, five positive impulses and five negative impulses applied at the selected points		N/A
	Test level 3 applied for line-to-line coupling mode, a generator with 2 $\Omega$ source impedance being		N/A
	Test level 4 applied for line-to-earth coupling mode, a generator with 12 $\Omega$ source impedance being		N/A
	Tools has surge arresters incorporating spark gaps, test was repeated at 95 % of the flashover voltage		N/A
18.8.5	Injected currents as in IEC 61000-4-6:2008 applied to tool, test level 3 applicable, all frequencies between 0,15 MHz to 230 MHz covered		N/A
18.8.6	Class 3 voltage dips and interruptions in accordance with IEC 61000-4-11:2004 applied to tool		N/A
	Values of Tables 1 and 2 of IEC 61000-4-11:2004 were applied at zero crossing of the supply voltage		N/A
18.8.7	Radiated fields in accordance with IEC 61000-4-3:2010 applied to tool, test level 3 applicable		N/A
	Frequency ranges 80 MHz to 1 000 MHz tested		N/A

<b>19</b>	<b>MECHANICAL HAZARDS</b>		P
19.1	Adequate protection against injury provided against moving and other dangerous parts		P
	Protective enclosures, covers, and the like have adequate mechanical strength and cannot be removed without the aid of a tool		P

IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
	Adjustable guard used as protection of the working element has easily accessible means of accurate adjustment		N/A
	No dangers from adjusting the guards		N/A
	No contact with dangerous moving parts using probe B of IEC 61032:1997, test force $\leq 5\text{N}$		P
	Any soft materials removed prior to the test		N/A
A	Test with probe B of IEC 61032:1997 not applicable to chuck and any accessory that may be inserted		P
19.2	No hazardous ragged or sharp edges, other than necessary for the functioning of the tool		P
19.3	No contact with dangerous moving parts through dust collection openings, using probe B of IEC 61032:1997, test force $\leq 5\text{N}$		N/A
19.4	Hand-held tool has at least one handle or grasping surface for safe handling during use		P
	Transportable tools provided with at least one handle, grasping surface or the like for safe transportation		N/A
	Lawn and garden machinery has adequate grasping surfaces for safe handling during use		N/A
19.5	Tool allows visual check of the contact of cutting tool with workpiece		P
19.6	R This subclause of Part 1 is not applicable		N/A
19.7	Transportable tool or lawn and garden machinery intended to be used on a surface such as the floor or a table has adequate stability		N/A
	10° tilting test, tool or machinery did not tip over		N/A
	Tested with doors open and closed		N/A
	Filled with most unfavourable quantity of water or the recommended liquid		N/A
19.8	Transportable tool provided with wheels identified in the relevant part of IEC 62841-3 has adequate stability during transportation		N/A
	10° tilting test, tool did not tip over		N/A
19.9	Fixed guards to be removed to convert the tool or to change the accessory, fastenings remains attached to the guard or to the machinery		N/A
	Fastening not completely removed and considered as still attached		N/A



IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
19.101	Chuck keys so designed that they drop out of position when released	No chuck key	N/A
A	Metal clips are not fixed to the flexible cable or cord		N/A
A	The key fell out when inserted into the chuck, without tightening, and 2 s after the tool was turned such that the key was facing down		N/A
19.102.....	Handles		P
19.102.1 A	General		P
A	The design of the handle(s) is such that the operator can control the static stalling torque during the operation of the tool. (Fig 104-107)		P
A	Single handle tool		N/A
			N/A
			N/A
			N/A
			N/A
	Multi handle tool		P

IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
		For DL-DC26-E1: $M_{R,max}=400N \times 0.140m=56Nm$ $M_{meas.}=35.64Nm$ For DL-DC28-E2: $M_{R,max}=400N \times 0.140m=56Nm$ $M_{meas.}=37.60Nm$	P
			N/A
			N/A
			N/A
			N/A
19.102.2 A	Test equipment		—
A	a) The torque transducer and the rotational angle sensor continuously monitors the torque and the rotation produced by the output spindle of the tool during the test of 19.102.3.		P
A	b) The output of the torque transducer is connected to an oscilloscope or other data acquisition equipment capable of displaying the torque vs. time graph of the tool's output during the test of 19.102.3.		P

IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
A	c) The torque transducer is rated to measure a torque of at least 150 % of the static stalling torque of the tool or slip torque of an overload clutch (MR) with a measurement accuracy of $\pm 1$ %.		P
A	d) The rotational angle is measured with an accuracy of $\pm 2^\circ$ .		P
A	e) The data acquisition equipment used for measuring the torque signal during the test has a sampling rate of at least 15 kHz, but the bandwidth is limited by a first order low pass filter with a cut-off frequency of $(1 \pm 0,1)$ kHz.		P
A	f) The joint that is connected to the tool during the test is capable of stalling the tool over a rotational angle of $30^\circ$ to $60^\circ$ . The joint that fulfils this requirement is a torsional element or other such device that remains in equilibrium during the test.		P
A	g) A regulated power supply that is connected to the tool during the test is capable of providing the rated voltage and rated frequency provided on the tool's nameplate (e.g. 120 V AC, 60 Hz). It is also suitably sized such that the voltage drop during the test is not deviate from the rated voltage or the upper limit of the rated voltage range by more than 7 %.		P
A	Test procedure		—
A	The measurement is conducted by using seven trial measurements of the same sample, each trial conducted as follows: 1) Energize the tool to the full "on" position as quickly as possible and allow the joint to be tightened until it comes to a complete stop.		P
A	2) Record the measured output torque.		P
A	a) For tools without a mechanical overload clutch, the output torque is determined by either i) or ii):		N/A
A	i) For signals that are stable for a minimum of 2 ms after the initial peak, the output torque value is determined by measuring over the stable region for an interval T not exceeding 100 ms. (Fig 108)		N/A
A	ii) For signals that are not stable for a minimum of 2 ms after the initial peak, the output torque value shall be the r.m.s. value of the signal over the rotation from off until peak torque is achieved. (Fig 109)		N/A
A	The tool employs an electric circuit(s), the output torque is either:		—

IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
A	- all functions affecting the output torque are considered SCFs and are evaluated according to 18.8, the applicable value of i) or ii) above with all functions affecting the output torque enabled; or		N/A
A	- all functions affecting the output torque are not evaluated as SCFs according to 18.8, the greatest applicable value of i) or ii) above with:		N/A
A	• all functions affecting the output torque enabled;		N/A
A	• each function affecting the output torque disabled, tested for one trial. If the output torque is greater than the value with all functions enabled, the test resulting in the greatest output torque value is conducted for an additional two trials, where each trial may use a new sample.		N/A
A	b) For tools with a mechanical overload clutch: The output torque is determined by the peak value of the first peak that occurs after starting the trial. Later peaks, even if they appear to have greater values, are not taken into account. (Fig 110)		P
A	3) Before the next trial, disconnect the spindle from the test fixture and operate the tool under no-load for a minimum of 3 s. Allow the tool to cool for a minimum of 2 min before the next trial.		P
A	MR is computed as the average of five of the measurements from each of the seven trials, with the highest and lowest measurement eliminated. The standard deviation of the five measurements shall also be computed and shall be less than 5 %.		P
A	If it is not, then the fixture shall be adjusted to achieve the required repeatability. In cases where an electronic circuit that affects the torque is disabled, MR is computed as an average of the three trials in 19.102.3, item 2) a), last bullet.		N/A

<b>20</b>	<b>MECHANICAL STRENGTH</b>		P
20.1	Adequate mechanical strength to withstand rough handling		P
	No flashover or breakdown occurred during test of Annex D between live parts and accessible parts after tests of clause 20.2-20.4	See Table D.2	P
	No live parts became accessible		P
	No creepage distances or clearances below the values of 28.1		P
	Mechanical safety of the tool as required by this standard not impaired		P

IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
	Inner cover withstood test after removal of the decorative cover		N/A
20.2	Three blows applied to every weak point of enclosure by spring-operated impact test apparatus in Clause 5 of IEC 60068-2-75:1997		P
	Brush cap impact energy (Nm)..... :	No brush cap	—
	Other part impact energy (Nm)..... :	1J	—
	Blows applied each point of the enclosure likely to be weak..... :	Applied to enclosure	P
	Blows applied to guards, covers, handles, levers, knobs and the like as necessary..... :	Applied to switch button and handle	P
20.3	Test of 20.3.1, 20.3.2 or the relevant part of IEC 62841-4 applied, as applicable		P
20.3.1	Hand-held tool withstood impact of 3 varied drops on a concrete surface from 1 m		P
	Separable accessories were not mounted		P
	Any attachments provided as specified in instructions, test repeated with each attachment or combination of attachments mounted to a separate tool sample		P
A	Tip test with hammers up to 10kg		N/A
	Tip the tool in three different directions on to the concrete surface		N/A
	Use the longest accessory recommended by the manufacturer except when the overall height of the tool including the accessory is greater than 1,5 m		N/A
	The tool was tested with an accessory such that the overall height of the tool including the accessory is $(1,5 \pm 0,1)$ m		N/A
20.3.2	Transportable tool withstood impact with $\varnothing (50 \pm 2)$ mm, $(0,55 \pm 0,03)$ kg steel sphere, travelling vertically by $(1,3 \pm 0,1)$ m.		N/A
	Drop test applied to part of the tool that can be impacted from above		N/A
	Pendulum test applied to part of the tool that cannot be impacted from above		N/A
	Guard became disassembled but could be reassembled to function properly.		N/A
	Guard became deformed but could be restored to its original shape		N/A
	Other damage, except to guard, accepted, as tool was incapable of normal operation		N/A

IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
20.4	Adequate mechanical strength of brush holder and their caps		N/A
	Brush cap removed and replace 10 times applying specified tightening torque		N/A
	Tightening torque (Nm)..... :		—
	No damage to brush holders impairing its further use, thread not damaged, cap shows no cracks		N/A
20.5	Handles and grasping surfaces have adequate mechanical strength to provide insulation between grasping area and output shaft		P
	A separate sample subjected to a single impact from 1m onto a concrete surface on each handle and each recommended grasping surface		P
A	Tip test with hammers up to 10kg		N/A
	Tip the tool in three different directions on to the concrete surface		N/A
	Use the longest accessory recommended by the manufacturer except when the overall height of the tool including the accessory is greater than 1,5 m		N/A
	The tool was tested with an accessory such that the overall height of the tool including the accessory is $(1,5 \pm 0,1)$ m		N/A
	No flashover or breakdown occurred during test of D.2 at 1250 V a.c. between handles and grasping surfaces in contact with foil and the output shaft of the tool	See Table D.2	N/A

<b>21</b>	<b>CONSTRUCTION</b>		P
21.1	Hazardous accidental changing of settings to suit different voltages or speeds unlikely to occur		P
21.2	Accidental changing of settings of control devices unlikely to occur		P
21.3	Removal of parts ensuring required degree of protection against moisture not possible without aid of a tool		N/A
21.4	Fixing of handles, knobs and the like, used to indicate position of switches or similar components in a hazardous wrong position, was not possible		P
21.5	Replacement of a flexible cable or cord requiring displacement of a switch was possible without subjecting internal wiring to undue stress		P

IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
	After repositioning of the switch and before reassembling the tool, verification of correct positioning of internal wiring was possible		P
21.6	Wood, cotton, silk, paper and similar fibrous or hygroscopic material not used as insulation, unless impregnated or chemically rendered non-fibrous		P
21.7	Ordinary driving belts not relied upon to provide required insulation	No driving belt used	N/A
	Special belt design employed to allow use as electrical insulation		N/A
21.8	Insulating barriers of Class II tools, and parts of Class II tools serving as supplementary or reinforced insulation are:		P
	- fixed such that they cannot be removed without being seriously damaged; or		P
	- so designed that they cannot be replaced in an incorrect position, and when omitted, the tool will be inoperable or manifestly incomplete		P
21.9	Inner conductors of a flexible cable or cord are used as wiring within class II construction and insulated from accessible metal parts by:		P
	- the sheath of the supply cord itself, this sheath not being exposed to undue thermal stress, clamping against accessible metal or other mechanical stress that could cause damage to it; or		P
	- a sleeve, tubing or barrier complying with the requirements of supplementary insulation.		P
21.10	Air-intake of motor enclosures not excessively large		P
	6 mm steel ball test applied to air-intake openings other than those adjacent to fan		P
21.11	No hazards from parts of Class I tool such as wire, screw, nut, washer or spring becoming loose or falling out of position, and accessible metal not made live		N/A
	Clearance and creepage distances of Class II tool or class II construction not reduced to less than 50% of values shown specified in 28.1		P
	Class II tool or Class II construction, other than those of the all-insulated type, provided with an insulating barrier between accessible metal and motor parts and other live parts		P
	Class I tool with adequately fixed parts, barriers, and sufficiently large creepage and clearances		N/A

IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
	All wires secured in place independent of terminal connection or solder		P
21.12	Supplementary and reinforced insulation not impaired by deposition of dirt, or dust resulting from wear of parts within the tool to the extent that creepage and clearances would be reduced		P
	Ceramic material not tightly sintered and similar materials, and beads alone, not used as supplementary or reinforced insulation		N/A
	Parts of Elastomer, natural or synthetic rubber used as supplementary insulation are resistant to aging		N/A
	Rubber parts so arranged and dimensioned that creepage distances not reduced below values in 28.1, even when cracks occurred		N/A
	Insulated material for embedded heating conductors serves only as basic insulation		N/A
	Ageing test for Elastomer and rubber parts for 70 h at 100±2°C		N/A
	No flashover or breakdown occurred during test of D.2, test voltages reduced to 75 per cent..... :	See Table D.2	N/A
	Rubber parts tested..... :		—
	Immersion test for ceramic material on tight sintering in specified fuchsine solution under no less than 15 MPa		N/A
	Test pressure applied (MPa)..... :		N/A
	Test duration (h)..... :		N/A
	After the test, freshly broken surfaces did not show any trace of dye visible with normal vision		N/A
	Ceramic parts tested..... :		—
21.13	Internal wiring, windings, commutators, slip rings and the like, and insulation in general, not exposed to oil, grease, and similar substances		P
	Adequate insulation properties of oil, grease, and similar substances used for lubrication of gears and the like with no effect on insulation		N/A
21.14	No access to brushes without aid of a tool		P
	When tightening screw-type brush-caps, two surfaces clamped together		N/A
	Locking device retaining brushes in position do not depend upon brush spring tension		P



IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
	Screw-type brush-caps accessible from the outside of the tool made of or covered with insulating material of adequate strength, and not projecting beyond surrounding surface of the tool		N/A
21.15	Tool employing a liquid system protects the user against increased risk of shock due to presence of liquid under normal use and faults of liquid system	No liquid system	N/A
	Tools employing liquid system constructed as Class III tools, or		N/A
	- class I or II and provided with a residual current device, and complying with 14.3-14.5, or		N/A
	- class I or class II and designed for use in combination with an isolating transformer and complying with 14.3 and 14.4		N/A
21.16	Tool with compartment accessible without the aid of a tool and likely to be cleaned in normal use, the electrical connections are not subject to pulling during cleaning		N/A
21.17	Tool is fitted with a power switch to control the motor		P
	Switch actuator easily visible and accessible		P
21.17.1	For tools incorporating a switch with a lock-off device, and switch trigger is operated by squeezing action closing the fingers towards the palm of the hand, lock-off system designed to ensure sufficient durability against abuse and environmental conditions to prevent start by the switch trigger alone	No lock-off device.	N/A
21.17.1.1	Relevant tool housing is kept for 1 h in a heating cabinet at 80 °C .....		N/A
21.17.1.2	Additional test of 21.17.1.2 for lock-off devices that are self-restoring to the lock-off position		N/A
	Number of cycles as per 23.1.10.2.....		N/A
21.17.1.3	Push force of Table 7 applied to most unfavourable point of the switch actuating member .....		N/A
	The switch did not actuate		N/A
	The switch and its lock-off system operated as designed after the applied force was terminated		N/A
21.18	Requirements of 21.18.1, 21.18.2 or the relevant part of IEC 62841-4 observed, as applicable		P
21.18.1	Hand-held tool fitted with momentary power switch, unless without a relevant part of IEC 62841-2 and without a substantial risk from continued operation		P

IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
	Switch can be switched on and off by the user without releasing any of the required handle(s) or grasping surface(s)		P
A	Power switch other than momentary power switch are permitted		N/A
21.18.1.1	A momentary switch locking in “on” position unlocks automatically upon a single actuation motion without releasing the grasp on the tool	Switch with lock-on device	P
	More than one switch, the lock-on switch(es), if any, is (are) within the grasping zone necessary to control the tool		N/A
	Any one of these switches automatically unlocks or makes ineffective all remaining lock-on devices with a single actuation motion without releasing the grasp on the tool		N/A
	Switch cannot be locked in “on” position when a risk with continued operation is defined by the relevant part of IEC 62841-2		N/A
21.18.1.1 A	Tools with a maximum output torque greater than 100 Nm are not provided with a lock-on device.		N/A
	For tools with a maximum output torque of 100 Nm or less, a power switch lock-on device, if any, is located outside the grasping area, or so designed that it is not likely to be unintentionally locked on by the user's hand during intended left- or right-handed operation.		P
	This grasping area is the contact area between either hand and the tool while the index finger of that hand is resting on the power switch actuator of the tool.		P
	With the power switch in the “on” position, the lock-on device is actuated by a straight edge 25 mm long when the straight edge is pushed down on the lock-on device.		P
	The straight edge is oriented in any direction and is applied to bridge the surface of the lock-on device and any surface adjacent to the lock-on device.		P
21.18.1.2	Power switch triggers and lock-off devices so located, designed or guarded that inadvertent operation is unlikely to occur	No lock-off device	N/A
	Tool did not start when 100 mm sphere is applied to the power switch, or		N/A
	Two separate and dissimilar actions necessary before the motor is switched		N/A

IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
21.18.2	Transportable tool fitted with power switch easily actuated "on" or "off" without any reasonably foreseeable hazard		N/A
21.18.2.1	Power switch in transportable tools is of momentary type, or		N/A
	Voltage recovery following an interruption of the supply gives rise to a hazard		N/A
	Relevant part of IEC 62841-3..... :		—
21.18.2.2	"On"/"off" control capable of being turned off by the operator with a single straight-line motion		N/A
	Flap cover covers the stop button so that pushing the flap actuates the stop		N/A
21.18.2.3	Power switch so located, designed or guarded that unintentional movement to the "on" position is unlikely		N/A
	Tool did not start when 100 mm sphere is applied to the power switch, or		N/A
	Two separate and dissimilar actions necessary before the motor is switched		N/A
21.18.2.4	Push-pull switch is turned off by an inward push		N/A
21.19	Protection against electric shock not affected when screws removed during user maintenance are incorrectly replaced during reassembly		P
	Creepage and clearances between live parts and accessible metal parts not reduced below values in 28.1 when screws are installed at improper screw locations		P
21.20	Tool marked with the first numeral of IP system complies with IEC 60529:2013..... :	IPX0	N/A
21.21	No risk of electrical shock from charged capacitors when touching pins of the plug		P
	Max. voltage measured between pins of the plug is $\leq 34$ V after 1 s after each disconnection (V) ..... :	Measured max. 4.4V	P
	Capacitors rated $\leq 0.1 \mu\text{F}$		N/A
	Capacitors complying with the requirements for protective impedance specified in 9.2 and 21.34		N/A
21.22	Non-detachable protective parts either removable with the aid of a tool or reliably fixed		P
	Snap-in devices have an obvious locked position and have fixing properties that do not deteriorate		N/A
	Parts disassembled and assembled 10 times prior to test		P

IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
	Parts affected by temperature tested immediately after conditions of Clause 12		N/A
	Test applied to all parts likely to be detached, whether or not fixed by screws, rivets, or similar parts		P
	Weak areas of the covers or parts subjected during 10 s to - 50 N push force		P
	- 50 N pull force if the shape of the part prevents easy slippage of fingertips		P
	- 30 N pull force if projection of the gripped part is less than 10 mm in the direction of removal		P
	Test fingernail of Fig. 1 inserted in apertures and joints with a force of 10 N and then slid sideways with a force of 10 N		P
	Axial pull unlikely, test fingernail of Fig. 1 inserted in apertures and joints with a force of 10 N to enable a force of 30 N for 10 s by means of a loop		P
	A torque of 2 Nm applied at the same time as pull or push force on parts 50 mm or smaller and likely to be subjected to twisting		P
	A torque of 4 Nm applied at the same time as pull or push force on parts larger than 50 mm and likely to be subjected to twisting		P
	Projection was less than 10 mm and required a torque of (Nm), test torque reduced ..... :		N/A
	Parts not detached, and remained in locked position		P
21.23	Handles, knobs, grips, levers etc., withstood axial force of 30 N for 1 minute		P
21.24	Storage hooks and similar devices for flexible cords are smooth and well rounded		N/A
21.25	Current-carrying parts and other parts resistant to corrosion under normal use		P
	After tests of Clause 15, no sign of corrosion on relevant parts		N/A
	Stainless steel and similar corrosion-resistant alloys and plated steel considered satisfactory		N/A
21.26	Insulation between parts operating at SELV and other live parts complies with the requirements for double insulation or reinforced insulation		N/A
21.27	Insulation between parts separated by protective impedance comply with requirements for double or reinforced insulation		N/A

IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
21.28	Shafts of operating knobs, handles, levers etc. not live unless their removal does not make the shaft accessible to test probe B of IEC 61032:1997		P
21.29	Handles, levers, and knobs of non-class III tool held or actuated in normal use do not become live during an insulation fault		P
	Metallic handles, levers, and knobs with shaft or fixings likely to become live due to basic insulation fault, either adequately covered by insulating material or their accessible parts separated from their shafts or fixings by insulation		N/A
	Exception for handles, levers, and knobs of transportable tools and lawn and garden machinery of class I..... :		N/A
	Covering or insulating material complies with Electric Strength test in D.2 at 1250 V	See Table D.2	N/A
21.30	Tool likely to cut into concealed wiring or own cord, handles and grasping surfaces - made of insulating material, or		P
	- metal covered by insulating material, or		N/A
	- their accessible parts are separated by insulating barrier(s) from accessible metal parts that may become live by the output shaft		N/A
R	Insulated, stick type, auxiliary handle is provided with a flange $\geq 12$ mm high above grasping surface between grasping area and accessible parts that may become live by the output shaft		P
	This insulated area shall extend by at least 25 mm around all of the cross-section of the handle near the tool surface		P
	Insulated, stick type, auxiliary handle is provided with a flange $\geq 12$ mm high above grasping surface between grasping area and accessible parts that may become live by the output shaft		N/A
	21.30 not applicable as per relevant part of IEC 62841-2, IEC 62841-3 or IEC 62841-4..... :	Considered	P
21.31	Capacitors in class II tools not connected to accessible metal parts, and their metallic casings are separated from accessible metal parts by supplementary insulation		P
	Capacitors tied to accessible metal parts comply with Clauses 9.2 and 21.34		N/A
21.32	Capacitors not connected between contacts of the thermal cut-outs		N/A

IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
21.33	Lamp holders used only for connection of lamps		N/A
21.34	Protective impedance consists of at least two separate components with impedance unlikely to change significantly during lifetime of tool		N/A
	When a component short or open-circuited, values in Clause 9.2 were not exceeded ..... :		N/A
	Resistors comply with 14.1 of IEC 60065:2011 and capacitors comply with 14.2 of IEC 60065:2011... :		N/A
	Single Y1 capacitor acc. to IEC 60384-14 used instead of two separate components..... :		N/A
21.35	Tools is identified in the relevant part of IEC 62841-2 or IEC 62841-3 to produce a considerable amount of dust and has either integral dust collection/suction device or dust outlet(s)		N/A
	Dust discharge directed away from the operator		N/A
	Dust outlet with external suction device(s) does not impede the normal use of the tool		N/A

<b>22</b>	<b>INTERNAL WIRING</b>		P
22.1	Wireways smooth and free from sharp edges, cooling fins, etc		P
	Holes in metal through which insulated wires pass provided with bushings or, except as required by relevant part of IEC 62841-2, IEC 62841-3 or IEC 62841-4, have smooth edges with radius $\geq 1,5$ mm		N/A
	Wiring prevented from coming into contact with moving parts		P
22.2	Internal wiring adequately rigid, fixed or insulated such that creepage and clearances cannot be reduced below values in 28.1		P
	Sleeving used as supplementary insulation on internal wiring, retained in position by positive means (removable only by breaking or cutting, or clamped at both ends)		P
22.3	Use of green or green/yellow conductors for earthing terminals only	Class II	N/A
22.4	Aluminium wires not used for internal wiring		P
22.5	Stranded conductors with lead-tin soldering are only used with spring terminals with constant contact pressure, except when clamping means pose no risk of bad contact	No soldering of conductor	N/A

IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
22.6	No undue stress to electrical connections and internal conductors from tool parts movable to each other in normal use, during adjustment or user maintenance		N/A
	Flexible metallic tubes do not damage insulation of the conductors contained within them		N/A
	Open-coil springs not used to protect the wiring		N/A
	Adequate additional insulating lining when coiled spring is used		N/A
	Flexing test at a rate of $\leq 6/\text{min}$ , through the largest angle allowed by the construction		N/A
	Number of flexings 10 000 for conductors/connections flexed during normal use; 2 000 for those flexed during adjustments; 100, for those flexed during user maintenance .....		—
	Tool withstands test of Annex D between live parts and accessible parts	See Table D.2	N/A
	Live parts not accessible after test		N/A

<b>23</b>	<b>COMPONENTS</b>		P
23.1	Components comply with relevant IEC standards	See Table 23.1	P
	Batteries are regarded as part of the tool and comply with Annexes K and/or L		N/A
	Components used in accordance with their markings		P
	Applied exceptions .....		N/A
	Components not previously tested and found to comply with the relevant IEC standard for the number of cycles specified, tested to 23.1.1 ... 23.1.11.....	Considered	P
23.1.1	Capacitors in auxiliary windings of motors marked with their rated voltage and rated capacitance.....		N/A
23.1.2	Fixed capacitors for radio interference suppression comply with IEC 60384-14		P
23.1.3	Small lamp holders similar to E10 lamp holders meet requirements for E10 lamp holders in IEC 60238		N/A
23.1.4	Isolating and safety isolating transformers comply with IEC 61558-1 and IEC 61558-2-4 or IEC 61558-2-6, as applicable		N/A
	Switch mode power supply units and transformers for such units comply with IEC 61558-2-16		N/A
23.1.5	Appliance couplers comply with IEC 60320, or		N/A

IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
	Instructions provided to inform user to connect the tool with non-IEC appliance couplers		N/A
23.1.6	Automatic temperature controls with electromechanical contacts that cycle in normal use have suitable endurance		N/A
	Tests to IEC 60730-1:2010, Cl. 17, conducted under conditions occurring in the tool		N/A
	Type of controls used and number of cycles per Cl. 17 of IEC 60730-1:2010 (cycles) ..... :		N/A
	Automatic controls comply with IEC 60730-1:2010, and are used in accordance with their marking		N/A
	Tests of Clause 17 of IEC 60730-1:2010 were not conducted on automatic controls because tool complies with this standard when protective device short-circuited		N/A
	Thermostats and temperature limiters tested in accordance with a specific exception in Note b) of Table 1 of Clause 12		N/A
23.1.7	Unless otherwise specified, tests on components per other standards conducted separately according to the relevant standard		N/A
	Component, marked and used per its markings		N/A
	Components not mentioned in Table 1 of Clause 12 tested as part of the tool		P
23.1.8	Components not separately tested and found to comply with the component standards as references in 23.1 or components not marked or not used in accordance with their marking, tested in accordance with the referenced relevant standard under the conditions occurring in the tool		P
	No IEC standard referenced in 23.1, no additional tests		P
23.1.9	Tool operated at 1,1 times rated voltage at no-load, capacitor voltage did not exceed 1.1 times its rated voltage (V) ..... :		N/A
23.1.10	Switches constructed to prevent failure that might impair compliance with this standard		P
	Switches, separately tested and found to comply with IEC 61058-1:2008, comply with 23.1.10.1		P
	Switches, not separately tested and found to comply with IEC 61058-1:2008, or not complying with 23.1.10.1, tested as in 23.1.10.2 to 23.1.10.3		N/A
23.1.10.1	Power switches rated for a voltage and current not less than respective ratings of the tool		P



IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
	Power switches rated for a.c. in a.c. tools and d.c. in d.c. tools		P
	Electronic power switches are at least classified for Continuous Duty as in IEC 61058-1:2008		N/A
	Switches for motor-operated tools and lawn and garden machinery classified for resistive and motor load as in 7.1.2.2 of IEC 61058-1:2008, if this load occurs in normal use		P
	Switches for magnetically driven tools and lawn and garden machinery classified for inductive load as in 7.1.2.8 of IEC 61058-1:2008, if this load occurs in normal use		N/A
	Switches alternatively regarded as switches for a declared specific load as in 7.1.2.5 of IEC 61058-1:2008 and classified based on the load conditions of the tool in normal use		N/A
	Ratings and load classifications for switches other than power switches are based on the conditions encountered in the tool		P
	Power switches for hand-held tools classified for min. 50K operating cycles .....	Approved switch, 5E4	P
	Power switches for transportable tools and lawn and garden machinery classified for min. 10K operating cycles .....		N/A
	Power switches with series electronics also endure 1000 operating cycles, electronics bypassed .....		N/A
	Switches other than power switches, if likely to be switched under electrical load, endure 1 000 operating cycles, unless the requirements of this standard are met with the switch short-circuited		N/A
	Exception for switches other than power switches that cannot be operated under electrical load		N/A
	Exception for motor reversing switches		N/A
	Exception for switches other than power switches, classified for 20 mA load as in 7.1.2.6 of IEC 61058-1:2008		N/A
23.1.10.2	Adequate endurance properties of switches	Approved switch, 5E4	N/A
	Test of 17.2.4.4 of IEC 61058-1:2008 conducted at load specified in 23.1.10.2.1 or 23.1.10.2.2 .....		N/A
	Power switches for hand-held tools tested for 50K cycles.		N/A
	Power switches for transportable tools and lawn and garden machinery tested for 10K cycles		N/A

IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
	Power switch contains mechanical contacts in series with electronic circuitry with one or more SSD and circuitry provides a protective function by reducing the current during switch operation, then test repeated on 3 samples for $\geq 1000$ cycles with the electronics bypassed; or		N/A
	Protective function considered SCF and complies with the greater PL levels for power switches in 18.8		N/A
	Switches other than power switches, if likely to be switched while energized, tested for 1000 cycles under load conditions of normal use		N/A
	After tests all switches were able to be turned on and off and complied with the insulating compliance (TE3) of 17.2.5.3 of IEC 61058-1:2008 for basic insulation		N/A
23.1.10.2.1	Power switches for motor-operated tools and lawn and garden machinery classified to 7.1.2.2 of IEC 61058-1:2008 and tested with external load as specified		N/A
	Power switches for magnetically driven tools and lawn and garden machinery classified to 7.1.2.8 of IEC 61058-1:2008 and tested with external load as specified		N/A
	Switches other than power switches, but which would encounter the same load conditions as power switches in normal use, tested as specified		N/A
23.1.10.2.2	For switches tested using the motor or magnetic load encountered in the tool, tested at rated voltage for the required number of cycles; tool is switched on at no-load and switched off at rated current or rated input		N/A
23.1.10.3	Power switches of motor-operated tools and lawn and garden machinery have adequate breaking capacity		P
	Locked-rotor test (TC9) of 17.2.4.9 of IEC 61058-1:2008 at 6 times I-M or with locked motor, each period $\leq 0,5$ s "on" and $\geq 10$ s "off"	Locking motor, 50 cycles	P
	Power switch showed no electrical or mechanical failure after test		P
23.1.11	Electronic power switches comply with 18.6 and 18.8		N/A
23.2	Tool not fitted with switches or automatic controls in flexible cords, except for protective devices such as RCDs		P
	Tool not fitted with devices causing the protection device in the fixed wiring to operate		P

IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
	Tool not fitted with thermal cut-outs which can be reset by a soldering operation		P
23.3	Protection devices or circuits that switch off the tool are non-self-resetting where a risk associated with inadvertent starting is specified		N/A
A	unless the tool is not equipped with a momentary power switch with a provision for being locked in the "on" position		N/A
23.4	Plugs and socket-outlets for ELV circuits and those used as terminal devices for heating elements not interchangeable with mains plugs and socket-outlets in IEC 60884, IEC/TR 60083 or IEC 60906-1 or with connectors and appliance inlets complying with IEC 60320-1		N/A
23.5	Motors connected to the supply mains with insulation inadequate for the rated voltage comply with Annex B		N/A

<b>24</b>	<b>SUPPLY CONNECTION AND EXTERNAL FLEXIBLE CORDS</b>		P
24.1	Tool provided with a supply cord $\geq 1,8$ m and with a plug; cord length (m)..... :	See Table 24.1	P
	Tool provided with a supply cord at least 1,8 m long and without a plug; cord length (m)..... :		N/A
	Information for connection given in the instructions		N/A
	Tool provided with appliance inlet having at least same degree of protection against moisture as required for the tool		N/A
	Tool provided with a supply cord $\geq 0,2$ m and $\leq 0,5$ m and with a plug or other connector having at least same degree of protection against moisture as required for the tool; cord length (m) ..... :		N/A
	Plugs, connectors and inlets suitable for the ratings of the tool		P
24.2	Supply cord assembled to the tool by attachment type (specify X, Y, or Z) ..... :	Type X attachment	P
	Supply cord with type Z attachment is allowed as per relevant part of IEC 62841-2, IEC 62841-3 or IEC 62841-4..... :		N/A
	Supply cords with type X attachment are specially prepared cords only available from the manufacturer or its service agent..... :	Ordinary power cord used	N/A
	Special cord includes part of the tool		N/A
24.3	Plugs fitted with only one flexible cord		P

IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
24.4	Supply cords not lighter than heavy polychloroprene sheathed flexible cable (code designation 60245 IEC 66) or equivalent	H07RN-F, 2 x 1.0mm <sup>2</sup> cord	P
R	PVC cords not used if external metal parts exceed 75 K temperature rise during test of Clause 12		N/A
24.5	Nominal cross-section area of supply cord per Table 8 (mm2)..... :	See Table 24.5	P
24.6	Supply cord of class I tool has green or green/yellow core connected to internal earthing terminal of the tool, and to earthing contact of plug		N/A
24.7	Lead-tin solder not used to consolidate leads under contact pressure, except when clamping means used prevents risk of a bad contact		N/A
	Clamping screws alone not used for securing soldered leads		N/A
24.8	Moulding supply cord to any part has no effect on the insulation of the cord		N/A
24.9	Supply cord protected against damage at its entry by flexible cord guard, or cord inlet, or bushing..... :	A flexible cord guard is provided	P
24.10	Cord inlets and bushings shaped to prevent damage to supply cord		N/A
	Cord inlet and bushings reliably fixed and not removable without the aid of a tool		N/A
24.11	In tools other than transportable tools, supply cord being flexed during operation is protected against excessive flexing at its entry ..... :	See Table 24.11	P
	Flexing test performed in apparatus shown in Fig. 2		P
	Weight attached to cable or cord (kg)..... :	See Table 24.11	—
	Oscillating member moved back and forth through an angle of 90° (45° on either side of the vertical) with rate of 60 flexings per minute		P
	After 10,000 flexings, sample turned through 90° about the centre of the cord entry		P
	Cord guard did not slip out from its location after completion of ten 1 sec lifts over 500 mm		P
	After the test, no conductor disconnected from terminal		P
	Number of strands versus number of broken strands of each conductor ≤ 10% ..... :	See Table 24.11	P
24.12	In tools other than transportable tools, supply cord being flexed during operation is protected against excessive bending at its entry ..... :	See Table 24.12	P

IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
	Cord guard fixed reliably and projects outside tool for a distance beyond inlet opening of at least 5 times the overall diameter of cord		P
	Mass attached to the free end of cord (g)..... :	See Table 24.12	—
	Curvature of cable or cord is nowhere less than 1,5 times the external diameter of cord		P
24.13	Tool provided with cord anchorage to relieve conductors of cord from strain, twisting, and protect them from abrasion.		P
	Pushing cord into the tool not possible		P
	Pull force was applied 25 times at the force shown in Table 9 (N)..... :	See Table 24.13	—
	After pull test, cord, unless on an automatic cord reel, subjected to torque in Table 9 for 1 min (Nm) :	See Table 24.13	P
	The cord was not damaged during the tests		P
	No appreciable strain at the terminals		P
	Cord longitudinal displacement (mm) ..... :	See Table 24.13	P
	No appreciable strain at the connection		P
24.14	Cord anchorage either accessible only with the aid of a tool, or the cord can only be fitted using a tool		P
24.15	Cord anchorages properly designed and located		P
	Cord cannot touch clamping screws of the cord anchorage that not separated from accessible metal parts by supplementary insulation		P
	Cord not clamped by metal screw bearing directly on the cord		P
	Glands are not used as cord anchorages		P
	Class I tool, cord anchorage of insulating material or with insulating lining fulfilling basic insulation, if an insulation fault on the cord could make accessible metal parts live		N/A
	Class I tool, sheath of the cord considered adequate		N/A
	Class II tool, cord anchorage of insulating material or insulated by supplementary insulation (sheath of the cord alone not sufficient)		P
24.16	Cord anchorages for type X attachment properly designed and located		P
	Cord anchorage allows easy replacement of cord		P
	Clear method of relief from strain and prevention of twisting		P

IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
	Screws operated during cord replacement are not used to fix any other part		P
	Screws operated during cord replacement are used to fix other parts and, if omitted or incorrectly mounted, make the tool inoperative or clearly incomplete		N/A
	Parts fastened to the cord anchorage by the same screw could not be removed without the aid of a tool		N/A
	Conductors inserted into terminals, terminal screws tightened sufficiently to prevent conductors from easily changing their position, torque set at (Nm).. :		P
24.17	Knots and tying strings for type X attachment are not used		N/A
24.18	For type X attachment, space for supply cord provided inside or as a part of tool		P
	- permits verification of correct connection and positioning of conductors		P
	- permits covers to be fitted without risk of damage to supply conductors or their insulation		P
	- ensures that uninsulated end of conductor, when detached from a terminal, cannot come into contact with accessible metal parts, or terminations are unlikely to slip free of the conductor		P
	For pillar terminals (with conductors that are not separately clamped $\leq 30$ mm from terminal), and for other terminals with screw clamping, a force of 2 N applied to the wire in any direction and adjacent to the terminal, screw or stud		P
	The uninsulated end of the conductor did not come into contact with accessible metal parts		P
24.19	Appliance inlet prevents access to live parts during insertion or removal of the connector		N/A
	Easy insertion of connector		N/A
	After insertion of connector, tool not supported by the connector in any position of normal use on a flat horizontal surface		N/A
	Test probe B of IEC 61032:1997 applied to tool inlet other than appliance inlet per IEC 60320		N/A
	Appliance inlet complies with IEC 60320		N/A
24.20	Interconnection cords meet the requirements for the supply cord, exceptions as follows		N/A
	Cross-sectional area is based on maximum current through conductor during test of Clause 12		N/A

IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
	Insulation adequate for conductor's working voltage		N/A
	Test of 24.11 restricted to range of motion during normal use.		N/A
24.21	Interconnection cords not detachable without tool if compliance with this standard is impaired when they are disconnected		N/A

<b>25</b>	<b>TERMINALS FOR EXTERNAL CONDUCTORS</b>		P
25.1	Tool provided with terminals or equally effective devices for connection to external conductors		P
	Terminals only accessible with the aid of a tool		P
	Screws and nuts allowed to also clamp internal conductors when they are unlikely to be displaced when fitting supply conductors		N/A
	Screws and nuts do not fix other components		P
	For tool with type X attachment, soldered connections allowed for connection of external conductors, when soldering alone is not used to maintain conductor in position	No soldered connection	N/A
	When provided, barriers prevent creepages and clearances between live parts and other metal parts from being reduced to < 50% of values in 28.1, the conductor can be fixed by soldering alone		N/A
	For type Y and Z attachments, soldered, welded, crimped and similar connections allowed for the connection of external conductors		N/A
	Class II tools, conductor so positioned or fixed that soldering, crimping, or welding alone not relied upon to maintain the conductor in the position		N/A
	Barriers prevent creepages and clearances between live parts and other metal parts from being reduced to < 50% of values in 28.1 for the Class of tool using Type Y or Z attachments		N/A
	Conductors connected by soldering are held in place near termination independent of solder		N/A
	Conductor is "hooked in" before soldering and the hole through which it passes is not too large		N/A
	Terminals of a component built into the tool used to secure external conductors		P
	Conductors connected by other means, leads additionally fixed near terminations		P
	Stranded conductors secured at insulation and conductor		P

IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
25.2	Terminals for supply cords suitable for their purpose		P
	Supply cord terminals withstood pull force of 5 N		P
25.3	For type X attachment, when clamping means tightened or loosened, terminal did work loose, no stress on internal wiring, and creepage and clearances not reduced below values in 28.1		P
	Test per Clause 9.6, using 2/3 torque of that in Table 4, of IEC 60999-1:1999 (Nm)..... :	Considered	P
	Terminals secured by two screws to prevent loosening, or by one screw in a recess, or by other suitable means		N/A
	Correct position of supply terminals maintained by switches and similar devices with recesses and verified after connection of supply cord and repositioning of device		P
	Sealing compound without other means of locking not used		N/A
	Self-hardening resins used only on terminals that are not subject to torsion in normal use		N/A
25.4	Type X attachment using terminals to clamp the conductor between metal surfaces do so without damage to conductor after torque test per Cl. 25.3		P
25.5	End of conductor inserted in the hole of pillar type terminals is visible, or can pass beyond threaded hole for a distance of half nominal diameter of screw, or 2,5 mm, the greater of the two (mm)..... :	Approved switch	P
25.6	For type X attachment, terminals clearly recognizable and accessible after opening the tool		P
	All terminals located behind one cover, or one part of the enclosure		P
25.7	For tool with type X attachment, terminal devices located or shielded to prevent a strand of wire from escaping		P
	No risk of accidental connection between live parts and accessible metal parts		P
	For class II tool, no risk of accidental connection between live parts and metal parts with supplementary insulation only		P
	8 mm long free wire of the stranded supply conductor did not touch any accessible metal part		P
	8 mm long free wire of the stranded supply conductor did not touch any metal parts with supplementary insulation only		P



IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
	8 mm long free wire of stranded conductor connected to an earthing terminal did not touch any live part		N/A
<b>26</b>	<b>PROVISION FOR EARTHING</b>		<b>P</b>
26.1	Accessible metal parts of class I tool permanently connected to an earthing terminal or termination within the tool		N/A
	Accessible metal parts of class I tool permanently connected to the earthing contact of the tool inlet		N/A
	Printed circuit boards are not used to provide continuity of protective earthing circuit		N/A
	No electrical connection between earthing terminals or contacts and neutral terminal		N/A
	No provision for earthing in Class II and III tools	Class II	P
	Rotating motor components with metal-to-metal bearing surfaces considered electrically bonded		N/A
	Metal parts behind a decorative cover that do not withstand test of Clause 20 considered accessible metal parts		N/A
26.2	Clamping means of earthing terminals adequately locked against accidental loosening		N/A
	Earthing connections not possible to loosen without the aid of a tool		N/A
	Terminals with screw clamping comply with the relevant requirements of Clause 25, and screwless terminals comply with IEC 60998-2-2		N/A
	For specially prepared cords, terminals comply with IEC 61210 and table 10		N/A
	Screwless terminals tested per IEC 60998-2-2		N/A
26.3	Earth connection of detachable parts was made before the current-carrying connections established when placing the part in position, and the current carrying connections separated before earth connection was broken when removing the part		N/A
	If cord slips out of cord anchorage, current-carrying conductors become taut before earthing conductor		N/A
26.4	No risk of corrosion between metal parts of earthing terminals and copper of earthing conductor		N/A
	Parts transmitting current in case of an insulation fault, other than parts of metal frame or enclosure, are coated or uncoated metal with adequate resistance to corrosion		N/A

IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
	Thickness of electroplated coating ( $\mu\text{m}$ )..... :		N/A
	Parts of coated or uncoated metal providing or transmitting contact pressure only, adequately protected against rusting		N/A
	Protection provided against risk of corrosion resulting from contact between copper and aluminium (or aluminium alloy)		N/A
	Parts subjected to a treatment such as chromate conversion coating are used only to provide or transmit contact pressure		N/A
	Thickness of coating of steel measured in accordance with ISO 2178 or ISO 1463 ( $\mu\text{m}$ )..... :		N/A
	Resistance to rusting test..... :	See also 15.1	N/A
26.5	Resistance of earthing circuit (max. 0.1 $\Omega$ )..... :		N/A
	Test current (A)..... :		—
	Voltage drop between the earthing terminal and accessible metal part (V)..... :		—

<b>27</b>	<b>SCREWS AND CONNECTIONS</b>		<b>P</b>
27.1	Fixings and electrical connections (earthing connections included) withstand mechanical stresses occurring in normal use		P
	Screws not made of soft metal such as zinc or aluminium		P
	Diameter of screws of insulating material not used for electrical or earthing connection, diameter (mm). ..... :	No insulation screw used	N/A
	Screws transmitting electrical contact pressure screw into metal		N/A
	Screws of insulating material not used if their replacement by a metal screw could impair supplementary or reinforced insulation		N/A
	Screws removed when replacing the supply cord with type X attachment, or during maintenance, are not of insulating material where their replacement by a metal screw could impair basic insulation		N/A
	Screws and nuts tightened and loosened 10 times for screw engaged with a thread of insulating material		P
	Nuts and other screws tightened and loosened five times		P

IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
	Screws engaging with a thread of insulating material completely removed and reinserted each time		P
	When testing terminal screws and nuts, a flexible conductor of the largest cross-sectional area per Clause 24.5 placed, and each time repositioned, in the terminal (mm <sup>2</sup> )..... :	1.0mm <sup>2</sup>	P
	Test using a suitable test screwdriver, spanner or key, torque as in Table 11 and the relevant column		P
	Column I for metal screw without head, flush with surface (Nm) ..... :		N/A
	Column II for other metal screws and nuts (Nm)... :	See Table 27.1	P
	Column II for screws of insulating material, having a hexagonal head with a width across flats exceeding overall thread diameter (Nm)..... :		N/A
	Column II for screws of insulating material, having a cylindrical head and a key socket with a width across corners exceeding overall thread diameter (Nm) .. :		N/A
	Column II for screws of insulating material, with a head having a slot or cross-slots longer than 1,5 times the overall thread diameter (Nm)..... :		N/A
	Column III applied to other screws of insulating material (Nm)..... :		N/A
	No damage impairing further use of fixing or electrical connections		P
27.2	Contact pressure not transmitted through insulating material other than ceramic, unless compensated for shrinkage or distortion		P
27.3	Space-threaded screws not used for connection of current-carrying parts, unless direct clamping and suitable locking provided		P
	No thread-cutting screws used for connection of current-carrying parts	No such construction	N/A
	Use of two space-threaded or thread-cutting screws in earthing circuits		N/A
27.4	Screws making both mechanical and electrical connections are locked against loosening		N/A
	Rivets for current-carrying connections subjected to torsion in normal use locked against loosening		N/A
27.5	Screwless connectors not intended for disconnection in normal use prevent disconnection in normal use		N/A
	Connectors withstood 5 N pull through the wire		N/A
	Neither the connector nor the wire became disconnected		N/A

IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
	Directions of the application and exit of the wire not in line, force applied in both directions, one at a time		N/A
	Connectors fulfilled relevant IEC standards and were considered to fulfil requirements of 27.5.		N/A
27.5.1	Conductors secured by more than one means, unless their detachment does not impair safety		N/A
	Only one means of securing, test with detached conductors		N/A
	Clearances not reduced below 50 % of values in 28.1		N/A

<b>28</b>	<b>CREEPAGE DISTANCES, CLEARANCES AND DISTANCES THROUGH INSULATION</b>		P
28.1	Creepage and clearances not less than the values in Table 12, except for cross-over points of motor windings .....	See Table 28.1	P
	When a resonance voltage occurs, creepage and clearance are not less than specified for the voltage imposed by the resonance; these values increased by 4 mm in case of reinforced insulation		N/A
	Creepage and clearances for a tool with an appliance inlet measured with an appropriate connector inserted		N/A
	Creepage and clearances on a tool with other attachment measured on the tool as delivered		P
	Measurements on tool with belt made with the belt in place and belt tension adjusted to the most unfavourable position within its adjustment range		N/A
	Measurements repeated with the belt removed		N/A
	Movable parts placed in the most unfavourable position		P
	Nuts and screws with non-circular heads tightened in the most unfavourable position		N/A
	Clearances between terminals and accessible metal parts also measured with screws and nuts unscrewed as far as possible and they were not less than 50% of Table 12 .....	See Table 28.1	P
	Distances through slots or openings in external parts of insulating material measured to metal foil in contact with accessible surface with the foil pushed into corners using test probe B of IEC 61032:1997:	See Table 28.1	P

IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
	2 N force applied to internal wiring, bare conductors and uninsulated capillary tubes of thermostats and similar devices during measurement		P
	30 N force applied to enclosure		P
	Measurements made according to Annex A	See Table 28.1	P
	Creepage and clearances on a tool having parts with double insulation and no metal between basic insulation and supplementary insulation		P
	PWB with peak voltage stresses $\leq 150$ V per mm between parts of different potential provided with a min. distance of 0.2 mm, when protected against deposition of dirt	See Table 28.1	N/A
	-PWB with 100 V per mm provided with a min. distance of 0.5 mm, when not protected against deposition of dirt	See Table 28.1	N/A
	Values of the table applied when limits mentioned above resulted in higher values than in the table	See Table 28.1	N/A
	Distances reduced further since the tool complied with the requirements of Clause 18 distances short-circuited one at a time .....	See Table 28.1	N/A
	Creepage and clearances within optocouplers not measured when individual insulation adequately sealed, with air excluded between material layers		N/A
	For live parts of different polarity separated by basic insulation only, creepage and clearances reduced as tool complied with Clause 18 when creepage and clearances short-circuited .....	See Table 28.1	N/A
28.2	Distance through insulation between metal parts was $\geq 1.0$ mm for working voltages $\leq 130$ V when separated by supplementary insulation	See Table 28.2	N/A
	Distance through insulation between metal parts was $\geq 1.5$ mm for working voltages $\leq 130$ V when separated by reinforced insulation	See Table 28.2	N/A
	Distance through insulation between metal parts was $\geq 1.0$ mm for working voltages $> 130\text{V} \leq 280\text{V}$ when separated by supplementary insulation, and $\geq 2.0$ mm when separated by reinforced insulation	See Table 28.2	P
	Distance through reinforced insulation between windings and accessible metal parts was $\geq 1.0$ mm for working voltages $\leq 280\text{V}$	See Table 28.2	P
	Requirement waived as insulation applied was in thin sheet form, other than mica or similar, and for supplementary insulation consisting of at least two layers, one layer having withstood electrical strength test for supplementary insulation		N/A

IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
	Requirement waived as insulation applied was in thin sheet form, other than mica or similar, and for reinforced insulation consisting of at least three layers, two layers having withstood electrical strength test for reinforced insulation		N/A
	Requirement waived as max. temperature rise determined during test of Cl. 12 did not exceed values in 12.5 for inaccessible supplementary or reinforced insulation		N/A
	Requirement waived as inaccessible reinforced or supplementary insulation, after conditioning for 168h at 50 K above max. temperature rise determined per Cl. 12, withstood test of Annex D at the oven temperature and room temperature (°C)..... :	See Table D.2	N/A
	For optocouplers, 168 h of conditioning at 50 K above the max. temperature rise measured on optocouplers during tests of Clauses 12 and 18, while operating under most difficult conditions		N/A

<b>ANNEX B</b>	<b>MOTORS NOT ISOLATED FROM THE SUPPLY MAINS AND HAVING BASIC INSULATION NOT DESIGNED FOR THE RATED VOLTAGE OF THE TOOL</b>		N/A
B.1.1	Motors with working voltage $\leq 42$ V		N/A
B.9.2	Metal parts of motor considered bare live parts		N/A
B.12.4	Temperature rise of body of motor determined instead of the temperature rise of the windings		N/A
B.12.5	Temperature rise of the body of the motor in contact with insulating materials did not exceed values in Table 1 for the relevant insulting material	See Table 12.1	N/A
B.18. 201	Tool operated at rated voltage with the terminals of motor and its capacitors short circuited		N/A
	Tool operated at rated voltage with the supply to the motor open circuited		N/A
	Tool operated at rated voltage with shunt resistor open circuited during operation of motor		N/A
B.21.101	For class I tools with a motor supplied by a rectifier circuit, dc circuit insulated from accessible parts of the tool by double or reinforced insulation		N/A

<b>ANNEX C</b>	<b>LEAKAGE CURRENT</b>		P
C.2	Leakage current measurement of non-operating tool	See Tables C.2A and C.2B	P
C.3	Leakage current measurement of operating tool	See Tables C.3A to C.3D	P

IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
<b>ANNEX D</b>	<b>ELECTRIC STRENGTH</b>		P
D.1	Any protective impedance were disconnected		N/A
	The tools were not connected to the supply		P
	Electric strength is checked by the tests of D.2		P
	For tools with heating elements, test voltages of IEC 60335-1:2010 apply to the heating elements only		N/A
	Insulation between live parts of motor in accordance with Annex B and its other metal parts not subjected to this test		N/A
	Tool in accordance with Annex L, tool is directly connected to the mains or to a non-isolated source		N/A
	Electronic devices bypassed to enable the test to be conducted		N/A
D.2	Test duration 1 min		P
	Voltage of substantially sinusoidal waveform, frequency 50 Hz or 60 Hz		P
	Electric strength test, voltages applied..... :	See Table D.2	P
	To distinguish between capacitor reactance current and unacceptable performance, d.c. potential 1,414 times the that for a.c. was used..... :		N/A
	No flashover or breakdown occurred during the test	See Table D.2	P

<b>ANNEX H</b>	<b>LOW-POWER CIRCUITS</b>		N/A
	Any points closest to the supply at which the maximum power delivered to the variable resistor does not exceed 15 W at the end of 5 s identified as called a low power points..... :		N/A

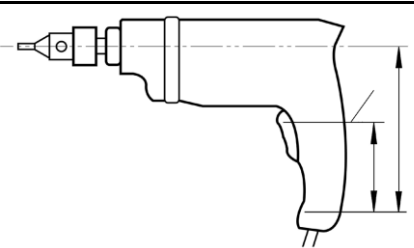
<b>ANNEX K</b>	<b>BATTERY TOOLS AND BATTERY PACKS</b>		N/A
K.1	Rated voltage for tools and battery packs $\leq 75$ V d.c.		N/A
K.5.7	Tests to be done at rated voltage were done with a fully charged battery		N/A
K.5.201	Peak voltage of any superimposed ripple exceeding 10 % of the average value was included		N/A
K.5.202	Measurements of lithium-ion cell voltages were made using a filter as specified		N/A
K.5.203	Test area protected against fire and explosion, and well ventilated		N/A
K.5.204	Discharging and charging as specified		N/A

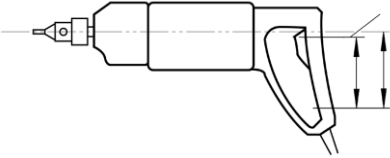
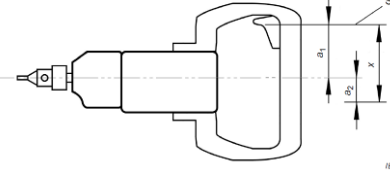
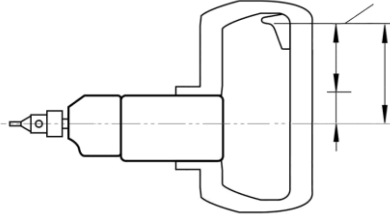
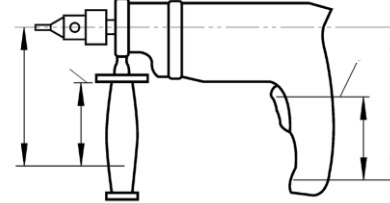
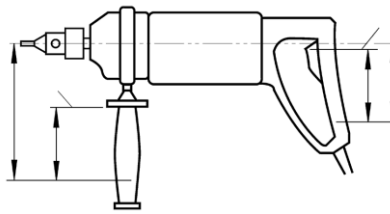
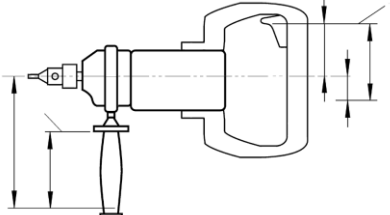
IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
K.5.205	Thermocouples for lithium-ion cell temperature measurement located as specified		N/A
K.5.206	Currents measured during battery charging are average currents		N/A
K.5.207	Fully charged batteries used, after resting for $\geq 2$ h but $\leq 6$ h at an ambient temperature of $(20 \pm 5) ^\circ\text{C}$		N/A
K.5.208	Battery consisting of a single cell not subject to special preparations of a cell in a series configuration		N/A
K.5.209	For series arrangement of parallel clusters of cells, the cluster is treated as single cell for specified tests		N/A
K.5.210	End-of-discharge voltages for common cell chemistries observed .....		N/A
K.8.3	Battery tools and detachable or separable battery packs marked with additional information		N/A
	- Business name and address of the manufacturer and, where applicable, its authorised representative .....		—
	- Designation of series or type.....		—
	Battery tools also marked with additional information		N/A
	- Year of manufacture and a date code identifying at least the month of manufacture.....		—
	- Designation of the tool.....		—
	- identification for parts shipped separately for assembly by the end user		—
	Detachable or separable battery packs marked with additional information		N/A
	- capacity in Ah or mAh.....		—
	- type of battery.....		—
	No misunderstanding by additional markings		N/A
K.8.4	Markings specified in K.8.1, 8.2 and K.8.3 not on a detachable part of the tool		N/A
	Markings specified in 8.2 clearly discernible from the outside of the tool		N/A
	Markings specified in K.8.3 visible with any separable battery pack or detachable battery pack removed		N/A
	Other markings on the tool visible after removal of a cover		N/A
K.8.14.1.1	5) Battery tool use and care		N/A
	6) Service		N/A

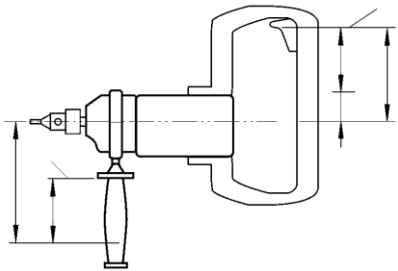
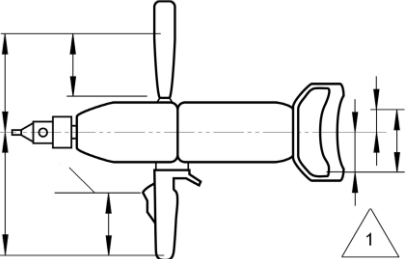


IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
K.8.14.1.10 1 A	Replacement of item 1) d)		N/A
K.8.14.2	e) Instructions for battery tools		N/A
K.9.1	Construction and enclosure provide adequate protection against electric shock		N/A
K.9.3	No two conductive, simultaneously accessible parts where the voltage between them is hazardous		N/A
	Conductive, simultaneously accessible parts provided with protective impedance		N/A
	Short circuit current between two simultaneously accessible parts (mA)..... :		N/A
	Capacitance between two simultaneously accessible parts ( $\mu\text{F}$ )..... :		N/A
K.9.5	Electric strength test of D.2 with 750 V applied to insulating material protecting from electric shock	See Table D.2	N/A
K.12.1	Tool operated at no-load until maximum temperature reached or battery discharged..... :		N/A
	No operation of protective devices during heating test		N/A
	Temperature rises met values in Table 2		N/A
A	The temperature-rise limit has been specified for the external enclosure does not apply to the enclosure of the impact mechanism.		N/A
K.12.201	Charging of lithium-ion battery under normal conditions did not exceed specified operating region for charging of the cell		N/A
	Charging procedure as specified		N/A
	Voltage, temperature and charging current monitored for all individual cells		N/A
	Test repeated with imbalanced battery		N/A
K.13.1	Thermoplastic materials of relevant enclosure parts sufficiently resistant to heat		N/A
	Ball-pressure test of IEC 60695-10-2:2003	See Table 13.1	N/A
K.13.2	Glow-wire test applicable only to external enclosure enclosing the current-carrying parts		N/A
	Non-metallic parts in of detachable or separable battery pack supporting connections that carry $\geq 0,2$ A during charging and those within a distance of 3 mm, subjected to the glow-wire test at 850 °C	See Table 13.2	N/A

IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
K.13.2.210 1	Polymeric battery enclosure material around current-carrying parts at least classified V according to IEC 60695-11-10:2013, unless ...		N/A
	... battery pack was tested to K.18.1 a).		N/A
K.18.1	Risk of fire or electric shock as a result of abnormal operation obviated as far as is practical		N/A
	No charring or burning of gauze or tissue paper resulted when battery tool and battery pack were subjected to any abnormal operations, tests a) to f)	See Table K.18.1	N/A
	No explosion during or after the test		N/A
	Adequate protection against electric shock		N/A
	Component(s) or conductors(s) that interrupt or limit the discharge current that operated operate during the above tests a) to f) ..... :	See Table K.18.1	N/A
	Test repeated two more times for devices relied upon to pass the test; devices opened the circuit in the same manner		N/A
	Test repeated with the open-circuited device bridged for devices not relied upon to pass the test		N/A
	Protective electronic circuits whose function is relied on to pass a test regarded as providing a SCF and comply with 18.8 with a PL = a	See Table 18.8	N/A
K.18.8	Li-ion charging systems are covered by K.18.201		N/A
K.18.201	Risk of fire and explosion as a result of abnormal operation during charging of a lithium-ion battery is obviated as far as is practical		N/A
	No charring or burning of gauze or tissue paper, no explosion resulted when battery tool and battery pack were subjected to any abnormal conditions a) to d)	See Table K.18.201	N/A
	The cells did not exceed the upper limit charging voltage by more than 150 mV unless...		N/A
	...charging system permanently was disabled from recharging the battery		N/A
	No evident damage to the cell vent to impair compliance with Subclause K.21.202.		N/A
K.18.202	No risk of fire or explosion when main discharge connections of a series configured, integral Li-ion battery, detachable or separable Li-ion battery pack were shorted under extreme imbalance		N/A
	All cells fully charged, one cell fully discharged		N/A
	Main discharge connections of the battery were shorted, resistance $\leq 10 \text{ m}\Omega$		N/A

IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
	No explosion during or after the test		N/A
	No charring or burning of the gauze or tissue paper		N/A
	Component(s) or conductors(s) that interrupt or limit the discharge current that operated operate during the above tests ..... :		N/A
	Test repeated two more times for devices relied upon to pass the test; devices opened the circuit in the same manner		N/A
	Test repeated with the open-circuited device bridged		N/A
	Protective electronic circuits whose function is relied on to pass a test regarded as providing a SCF and comply with 18.8 with a PL = a	See Table 18.8	N/A
K.18.203	No risk of fire or explosion during abusive overcharging of batteries comprised of cells other than the Li-ion type		N/A
	Battery was charged during 1,25 h at a rate of 10 times the C5 rate for the battery		N/A
	No explosion during or after the test		N/A
	No charring or burning of the gauze or tissue paper		N/A
K.19.6	Marking with rated no-load speed required, measured no-load speed of the spindle did not exceed 110 % of the rated no-load speed		N/A
	No-load speed measured after - operated for 5 min at no-load - replacing the battery with a fully charged battery - operating for 1 min at no-load		N/A
K.19.102 A	Handles		—
K.19.102.1	General		—
A	The design of the handle(s) is such that the operator can control the static stalling torque during the operation of the tool. (Fig 102-105)		N/A
A	Single handle tool		—
A		$M_{R,max} = 400 \text{ N} \times a$ $M_{meas.} = \text{Nm}$	N/A

IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
A		$M_{R,max} = 400 \text{ N} \times a$ $M_{meas.} = \text{Nm}$	N/A
A		$M_{R,max} = 400 \text{ N} \times a$ $M_{meas.} = \text{Nm}$	N/A
A		$M_{R,max} = 400 \text{ N} \times a$ $M_{meas.} = \text{Nm}$	N/A
A	Multi handle tool		—
A		$M_{R,max} = 400 \text{ N} \times a$ $M_{meas.} = \text{Nm}$	N/A
A		$M_{R,max} = 400 \text{ N} \times a$ $M_{meas.} = \text{Nm}$	N/A
A		$M_{R,max} = 400 \text{ N} \times a$ $M_{meas.} = \text{Nm}$	N/A

IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
A		$M_{R,max} = 400 \text{ N} \times a$ $M_{meas.} = \text{Nm}$	N/A
A		$M_{R,max} = 400 \text{ N} \times a$ $M_{meas.} = \text{Nm}$	N/A
K.19.102.2 A	Test equipment		—
A	a) The torque transducer and the rotational angle sensor has been continuously monitoring the torque and the rotation produced by the output spindle of the tool during the test of 19.102.4.		N/A
A	b) The output of the torque transducer is connected to an oscilloscope or other data acquisition equipment capable of displaying the torque vs. time graph of the tool's output during the test of 19.102.4.		N/A
A	c) The torque transducer is rated to measure a torque of at least 150 % of the static stalling torque of the tool or slip torque of an overload clutch (MR) with a measurement accuracy of $\pm 1 \%$ .		N/A
A	d) The rotational angle is measured with an accuracy of $\pm 2^\circ$ .		N/A
A	e) The data acquisition equipment used for measuring the torque signal during the test has a sampling rate of at least 15 kHz, but the bandwidth is limited by a first order low pass filter with a cut-off frequency of $(1 \pm 0,1) \text{ kHz}$ .		N/A
A	f) The joint that is connected to the tool during the test is capable of stalling the tool over a rotational angle of $30^\circ$ to $60^\circ$ . The joint that fulfils this requirement is a torsional element or other such device that remains in equilibrium during the test.		N/A
K.19.102.4 A	Test procedure		—

IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
A	The measurement is conducted by using seven trial measurements of the same sample, each trial conducted as follows:		—
A	1) Energize the tool to the full “on” position as quickly as possible and allow the joint to be tightened until it comes to a complete stop.		N/A
A	2) Record the measured output torque.		N/A
A	a) For tools without a mechanical overload clutch, the output torque is determined by either i) or ii):		N/A
A	i) For signals that are stable for a minimum of 2 ms after the initial peak, the output torque value is determined by measuring over the stable region for an interval T not exceeding 100 ms. (Fig 109)		N/A
A	ii) For signals that are not stable for a minimum of 2 ms after the initial peak, the output torque value shall be the r.m.s. value of the signal over the rotation from off until peak torque is achieved. (Fig 110)		N/A
A	The tool employs an electric circuit(s), the output torque is either:		—
A	- all functions affecting the output torque are considered SCFs and are evaluated according to 18.8, the applicable value of i) or ii) above with all functions affecting the output torque enabled; or		N/A
A	- all functions affecting the output torque are not evaluated as SCFs according to 18.8, the greatest applicable value of i) or ii) above with:		N/A
A	• all functions affecting the output torque enabled;		N/A
A	• each function affecting the output torque disabled, tested for one trial. If the output torque is greater than the value with all functions enabled, the test resulting in the greatest output torque value is conducted for an additional two trials, where each trial may use a new sample.		N/A
A	b) For tools with a mechanical overload clutch: The output torque is determined by the peak value of the first peak that occurs after starting the trial. Later peaks, even if they appear to have greater values, are not taken into account. (Fig 111)		N/A
A	3) Before the next trial, disconnect the spindle from the test fixture and operate the tool under no-load for a minimum of 3 s. Allow the tool to cool for a minimum of 2 min before the next trial.		N/A

IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
A	MR is computed as the average of five of the measurements from each of the seven trials, with the highest and lowest measurement eliminated. The standard deviation of the five measurements shall also be computed and shall be less than 5 %.		N/A
A	If it is not, then the fixture shall be adjusted to achieve the required repeatability. In cases where an electronic circuit that affects the torque is disabled, MR is computed as an average of the three trials in 19.102.3, item 2) a), last bullet.		N/A
K.19.201	Not possible to install a detachable or separable battery pack in reverse polarity		N/A
K.19.202	Li-ion battery enclosure designed to safely release gases generated as a result of venting		N/A
	Total area of the openings in the enclosure allowing gases to pass without obstruction is $\geq 20 \text{ mm}^2$ ; or...		N/A
	... pressure drop within enclosure was tested , no rupture occurred		N/A
K.20.1	Battery tools and battery packs have adequate mechanical strength and withstand tests of 20.2 and K.20.3.1 or K.20.3.2 and		N/A
	- did not catch fire or explode		N/A
	- met requirements of clauses K.9, K.19 and either K.18.1 (f) or K.28.1 after tests of 20.2 and 28.1		N/A
	Li-ion battery tools and battery packs, after the test of K.20.3.1 or K.20.3.2, - did not have an open circuit voltage below 90 % of the voltage measured immediately prior to the test		N/A
	- demonstrated normal discharging and recharging after the test		N/A
	- showed no damage to the cell vent impairing compliance with K.21.202		N/A
K.20.3.1	Adequate mechanical strength after drop tests on a concrete surface from a height of 1 m		N/A
	Test repeated with the battery pack removed from the tool		N/A
	Test repeated on the battery pack by itself		N/A
	The test was repeated with each attachment or combination of attachments		N/A
K.20.3.2	Impact test with 50 mm, 0,55 kg smooth steel sphere for battery-operated transportable tools ..... :		N/A
	travel of the sphere was 1,3 m ..... :		N/A

IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
	Damage (except to a guard) accepted, tool became incapable of normal operation		N/A
	Test repeated separately on detachable or separable battery packs with a mass $\geq 3$ kg		N/A
	Additional drop test on detachable or separable battery packs with a mass $< 3$ kg		N/A
K.21.17.1.2	The number of cycles is 6 000		N/A
K.21.201	Tool will not accept general purpose batteries as an energy source for their primary function		N/A
K.21.202	Venting of lithium-ion cells, if relied on for safety, not adversely obstructed		N/A
K.21.203	Unsuitable connector types not used for user accessible interfaces between elements of a Li-ion battery system		N/A
K.23.1.10	Power switches have adequate breaking capacity and present no electrical or mechanical failure		N/A
	50 cycles of making and breaking the locked output mechanism current		N/A
K.23.1.201	Power switches withstood, without excessive wear or other harmful effect, the mechanical, electrical, and thermal stresses occurring in normal use		N/A
	6000 cycles of operation making and breaking the no-load of the tool at a fully charged battery		N/A
K.23.201	Battery cells comply with IEC 62133		N/A
K.21.18.Z1 01 A	Rotary hammer with an internal battery has been equipped with an isolation device to prevent the risk of injury from mechanical hazards during servicing or user maintenance, or with a disabling device that prevents unintentional starting of the tool		N/A
	An insulating device must be equipped with:		—
	- a provided disconnection of all poles of the battery from the serviceable region of the tool		N/A
	- an unambiguous indication of the state of the disconnection device which corresponds to each position of its manual control (actuator)		N/A
	- protection against accidental reconnection.		N/A
	A disabling device was achieved by one of the following:		—



IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
	A self-restoring or non-self-restoring lock-off device where two separate and dissimilar actions are necessary before the motor is switched on (e.g. a power switch which has to be pushed in before it can be moved laterally to close the contacts to start the motor). It shall not be possible to achieve these two actions with a single grasping motion or a straight line motion		N/A
	A removable disabling device provided with the tool where it shall not be possible for the tool to be operated when either applied or removed		N/A
K.23.202	Rechargeable battery cells not of lithium-metal type		N/A
K.24.201	External flexible cable or cord of battery tools with separable battery packs have anchorages such that the conductors are relieved from strain, including twisting, where they are connected within the tool, and protected from abrasion		N/A
K.28.1	Creepage distances and clearances not less than the values in millimetres shown in Table K.1..... :	See Table 28.1	N/A
	Smaller clearance and creepage distances for parts of different polarity accepted, shorting of the two parts did not result in the tool starting		N/A
	For parts with a hazardous voltage between them, the sum total of the measured distances between each of these parts and their nearest accessible surface is not less than 1,5 mm clearance and 2,0 mm creepage (Fig. K.1) ..... :		N/A
	Creepage distances and clearances measured as indicated in Annex A		N/A
	Distances through slots or openings in external parts of insulating material measured to metal foil in contact with the accessible surface		N/A
	Foil pushed into corners and the like by means of test probe B of IEC 61032:1997, except not pressed into openings		N/A
	The sum total of distances measured between parts operating at hazardous voltage and accessible surfaces determined by measuring the distance from each part to the accessible surface		N/A
	Distances added together to determine the sum total (see Figure K.1)		N/A
	One of the distances was 1,0 mm or greater (see Annex A, cases 1 to 10)		N/A

IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
	Force applied by means of test probe B of IEC 61032:1997 at the following values:		N/A
	– 2 N for bare conductors		N/A
	– 30 N for enclosures		N/A
	Means provided for securing the tool to a support considered to be accessible		N/A

<b>ANNEX L</b>	<b>BATTERY TOOLS AND BATTERY PACKS PROVIDED WITH MAINS CONNECTION OR NON-ISOLATED SOURCES</b>		N/A
L.1	Rated voltage for battery pack $\leq 250$ V a.c. (single phase) or d.c. mains source and $\leq 75$ V d.c. battery source		N/A
	Rated voltage for battery pack $\leq 75$ V d.c.		N/A
L.5.7	Tests to be done at rated voltage were done with a fully charged battery		N/A
L.5.201	Peak voltage of any superimposed ripple exceeding 10 % of the average value was included		N/A
L.5.202	Measurements of lithium-ion cell voltages were made using a filter as specified		N/A
L.5.203	Test area protected against fire and explosion, and well ventilated		N/A
L.5.204	Discharging and charging as specified		N/A
L.5.205	Thermocouples for lithium-ion cell temperature measurement located as specified		N/A
L.5.206	Currents measured during battery charging are average currents		N/A
L.5.207	Fully charged batteries used, after resting for $\geq 2$ h but $\leq 6$ h at an ambient temperature of $(20 \pm 5) ^\circ\text{C}$		N/A
L.5.208	Battery consisting of a single cell not subject to special preparations of a cell in a series configuration		N/A
L.5.209	For series arrangement of parallel clusters of cells, the cluster is treated as single cell for specified tests		N/A
L.5.210	End-of-discharge voltages for common cell chemistries observed .....		N/A
L.8.1	Non-isolated sources that can supply a tool, or tool that can be supplied directly from the mains, marked with as required by the standard:		N/A
	Rated voltage(s) or voltage range(s), (V) .....		—
	Symbol for nature of supply or frequency (Hz) .....		—

IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
	Rated input, (W) or rated current (A) .....		—
	Symbol for class II .....		—
L.8.3	Tools and detachable or separable battery packs marked with additional information		N/A
	- Business name and address of the manufacturer and, where applicable, its authorised representative .....		—
	- Designation of series or type.....		—
	Tools also marked with additional information		N/A
	- Year of manufacture and a date code identifying at least the month of manufacture.....		—
	- Designation of the tool.....		—
	- identification for parts shipped separately for assembly by the end user		—
	Detachable or separable battery packs marked with additional information		N/A
	- capacity in Ah or mAh.....		—
	- type of battery .....		—
	No misunderstanding by additional markings		N/A
L.8.4	Markings of L.8.1, 8.2 and L.8.3 not on a detachable part of the tool		N/A
	Markings of 8.2 clearly discernible from outside the tool		N/A
	Markings of L.8.3 visible with any separable or detachable battery pack removed		N/A
	Other markings may be visible after removing cover		N/A
	Indications for switches and controls placed on or in vicinity of components		N/A
	Not placed on parts which can be repositioned		N/A
	Not positioned such that making the marking is misleading		N/A
L.8.14.1.1	5) Battery tool use and care		N/A
	6) Service		N/A
L.8.14.2	e) Instructions for battery tools		N/A
L.9	Construction and enclosure provide adequate protection against electric shock		N/A
	Tools connected to the mains or supplied by a non-isolated source.		N/A

IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
	Tool also evaluated with the battery pack removed when removal without the use of a tool was possible		N/A
L.9.201	There are no two conductive simultaneously accessible parts where the voltage between them is hazardous, except when provided with protective impedance		N/A
	Short circuit current between two simultaneously accessible parts (mA)..... :		N/A
	Capacitance between two simultaneously accessible parts ( $\mu\text{F}$ )..... :		N/A
L.10	Applied only when tool is directly connected to mains, or to a non-isolated source		N/A
L.11	Applied only when tool is directly connected to mains, or to a non-isolated source		N/A
	Test on tool capable of charging the battery while performing its function conducted while charging a discharged battery pack		N/A
L.12	Applied only when tool directly connected to mains, or to a non-isolated source		N/A
	Test on tool capable of charging the battery while performing its function conducted while charging a previously discharged battery pack with the charger connected		N/A
	Tool operated at no-load until maximum temperature reached or battery discharged..... :		N/A
	Test repeated, allowing the battery pack to charge while the tool was not operating		N/A
L.12.201	Charging of lithium-ion battery under normal conditions did not exceed specified operating region for charging of the cell		N/A
	Charging procedure as specified		N/A
	Voltage, temperature and charging current monitored for all individual cells		N/A
	Test repeated with imbalanced battery		N/A
L.13.1	Applied only when tool directly connected to mains, or to a non-isolated source	See Table 13.1	N/A
	Tool capable of charging the battery while performing its function also evaluated with charger connected to the mains		N/A
	Tool also evaluated with battery power alone when more unfavourable temperatures may result		N/A

IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
L.13.2	Non-metallic parts in of detachable or separable battery pack supporting connections that carry $\geq 0,2$ A during charging and those within a distance of 3 mm, subjected to the glow-wire test at 850 °C	See Table 13.2	N/A
L.14	Applied only when tool directly connected to mains, or to a non-isolated source		N/A
L.16	Applied only when tool directly connected to mains, or to a non-isolated source		N/A
L.17	Applied only when tool directly connected to mains, or to a non-isolated source		N/A
	Tools not capable of continuous operation operated under battery power for the duration of the test, except evaluated for electric strength with their charger connected		N/A
L.18	Applied only when tool directly connected to mains, or to a non-isolated source, except L.18.8 and L.18.201 to L.18.204,		N/A
L.18.8	Applied only to charging systems other than Li-ion		N/A
L.18.201	Risk of fire or electric shock as a result of abnormal operation obviated as far as is practical		N/A
	No charring or burning of gauze or tissue paper resulted when battery tool and battery pack were subjected to any abnormal operations, tests a) to f)	See Table L.18.201	N/A
	No explosion during or after the test		N/A
	Adequate protection against electric shock		N/A
	Component(s) or conductors(s) that interrupt or limit the discharge current that operated operate during the above tests a) to f) .....	See Table L.18.201	N/A
	Test repeated two more times for devices relied upon to pass the test; devices opened the circuit in the same manner		N/A
	Test repeated with the open-circuited device bridged		N/A
	Protective electronic circuits whose function is relied on to pass a test regarded as providing a SCF and comply with 18.8 with a PL = a	See Table 18.8	N/A
L.18.202	Risk of fire and explosion as a result of abnormal operation during charging of a lithium-ion battery is obviated as far as is practical		N/A
	No charring or burning of gauze or tissue paper, no explosion resulted when battery tool and battery pack were subjected to any abnormal conditions a) to d)	See Table L.18.202	N/A

IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
	The cells did not exceed the upper limit charging voltage by more than 150 mV unless...		N/A
	...charging system permanently was disabled from recharging the battery		N/A
	No evident damage to the cell vent to impair compliance with Subclause K.21.202.		N/A
L.18.203	No risk of fire or explosion when main discharge connections of a series configured, integral Li-ion battery, detachable or separable Li-ion battery pack were shorted under extreme imbalance		N/A
	All cells fully charged, one cell fully discharged		N/A
	Main discharge connections of the battery were shorted, resistance $\leq 10 \text{ m}\Omega$		N/A
	No explosion during or after the test		N/A
	No charring or burning of the gauze or tissue paper		N/A
	Component(s) or conductors(s) that interrupt or limit the discharge current that operated operate during the above tests ..... :		N/A
	Test repeated two more times for devices relied upon to pass the test; devices opened the circuit in the same manner		N/A
	Test repeated with the open-circuited device bridged		N/A
	Protective electronic circuits whose function is relied on to pass a test regarded as providing a SCF and comply with 18.8 with a PL = a	See Table 18.8	N/A
L.18.204	No risk of fire or explosion during abusive overcharging of batteries comprised of cells other than the Li-ion type		N/A
	Battery was charged during 1,25 h at a rate of 10 times the C5 rate for the battery		N/A
	No explosion during or after the test		N/A
	No charring or burning of the gauze or tissue paper		N/A
L.19.102.1	The handles are considered controllable when compliance with Subclause K.19.102.		N/A
L.19.201	Not possible to connect a battery pack in reverse polarity		N/A
L.19.202	Li-ion battery enclosure designed to safely release gases generated as a result of venting		N/A
	Total area of the openings in the enclosure allowing gases to pass without obstruction is $\geq 20 \text{ mm}^2$ ; or...		N/A
	... pressure drop within enclosure was tested , no rupture occurred		N/A

IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
L.20	Applied only when tool directly connected to mains, or to a non-isolated source, except L.20.201 and L.20.202		N/A
L.20.201	Battery tools with its battery pack attached have adequate mechanical strength and withstand tests of L.9, L.19, L.28.1 and either L.18.201 f) or L.28.201, and		N/A
	- did not catch fire or explode		N/A
	- demonstrated normal discharging and recharging after the test		N/A
	- showed no damage to the cell vent impairing compliance with L.21.202		N/A
L.20.202	For hand-held battery tools, L.20.202.1 applies; for transportable battery tools, L.20.202.2 applies		N/A
L.20.202.1	Adequate mechanical strength after drop tests on a concrete surface from a height of 1 m		N/A
	Test repeated with the battery pack removed from the tool		N/A
	Test repeated on the battery pack by itself		N/A
	The test was repeated with each attachment or combination of attachments		N/A
L.20.202.2	Impact test with 50 mm, 0,55 kg smooth steel sphere for battery-operated transportable tools .....		N/A
	travel of the sphere was 1,3 m .....		N/A
	Damage (except to a guard) accepted, tool became incapable of normal operation		N/A
	Test repeated separately on detachable or separable battery packs with a mass $\geq 3$ kg		N/A
	Additional drop test on detachable or separable battery packs with a mass $< 3$ kg		N/A
L.21	Applied only when tool directly connected to mains, or to a non-isolated source, except L.21.201 and L.21.202		N/A
L.21.18.Z1 01 A	Rotary hammer with an internal battery has been equipped with an isolation device to prevent the risk of injury from mechanical hazards during servicing or user maintenance, or with a disabling device that prevents unintentional starting of the tool		N/A
	An insulating device must be equipped with:		—
	- a provided disconnection of all poles of the battery from the serviceable region of the tool		N/A

IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
	- an unambiguous indication of the state of the disconnection device which corresponds to each position of its manual control (actuator)		N/A
	- protection against accidental reconnection.		N/A
	A disabling device was achieved by one of the following:		—
	A self-restoring or non-self-restoring lock-off device where two separate and dissimilar actions are necessary before the motor is switched on (e.g. a power switch which has to be pushed in before it can be moved laterally to close the contacts to start the motor). It shall not be possible to achieve these two actions with a single grasping motion or a straight line motion		N/A
	A removable disabling device provided with the tool where it shall not be possible for the tool to be operated when either applied or removed		N/A
L.21.201	Tool will not accept general purpose batteries as an energy source for their primary function		N/A
L.21.202	Venting of lithium-ion cells, if relied on for safety, not adversely obstructed		N/A
L.21.203	Unsuitable connector types not used for user accessible interfaces between elements of a Li-ion battery system		N/A
L.22	Applied only when tool directly connected to mains, or to a non-isolated source		N/A
L.23	Components		N/A
L.23.1.10	Applied only to power switches of tools capable of performing their intended operation when connected to the mains or to a non-isolated source		N/A
L.23.1.10.2 01	Switches controlling the primary operating means of the tool, except as indicated in L.23.1.10, have adequate breaking capacity and presented no electrical or mechanical failure		N/A
L.23.1.10.2 02	Power switches withstood, without excessive wear or other harmful effect, the mechanical, electrical, and thermal stresses occurring in normal use		N/A
	6000 cycles of operation making and breaking the no-load of the tool at a fully charged battery		N/A
L.23.201	Battery cells comply with IEC 62133		N/A
L.23.202	Rechargeable battery cells not of lithium-metal type		N/A
L.24.1	Also applied to the flexible cord between a non-isolated power source and the tool		N/A



IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
L.24.3	Also applied to the flexible cord between a non-isolated power source and the tool		N/A
L.24.4	This subclause applied, except flexible cord provided between a non-isolated power source and the tool not provided with a plug that can be connected directly to the mains		N/A
L.24.5	Not applied to flexible cord provided between a non-isolated power source and the tool		N/A
L.24.20	Requirements of this Subclause applied, except the flexible cord between a non-isolated power source and the tool not provided with an appliance inlet that can allow direct connection to mains		N/A
L.24.201	External flexible cable and cord have anchorages such that the conductors are relieved from strain, including twisting, where they are connected within the tool, and protected from abrasion		N/A
L.25	Not applied to interconnecting cords		N/A
L.26	Applied to the tool directly connected to the mains or to a non-isolated source		N/A
L.28.1	Applied when tool is directly connected to the mains or to a non-isolated source		N/A
	Battery packs connected to the tool during the evaluation		N/A
	Tool also evaluated with the battery pack removed when the removal could be accomplished without the use of a tool		N/A
	Creepage distances and clearances of IEC 60335-1: 2010 applied as applicable		N/A
L.28.201	Creepage distances and clearances not less than the values in millimetres shown in Table L.1		N/A
	Smaller clearance and creepage distances for parts of different polarity accepted, shorting of the two parts did not result in the tool starting		N/A
	For parts having a hazardous voltage between them, the sum of the measured distances between each of these parts and their nearest accessible surface is not less than 1.5 mm clearance and 2.0 mm creepage (Fig. L.1)		N/A
	Creepage distances and clearances measured as indicated in Annex A		N/A
	Distances through slots or openings in external parts of insulating material measured to metal foil in contact with the accessible surface		N/A

IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
	Foil pushed into corners and the like by means of test probe B of IEC 61032:1997, except not pressed into openings		N/A
	The sum total of distances measured between parts operating at hazardous voltage and accessible surfaces determined by measuring the distance from each part to the accessible surface		N/A
	Distances added together to determine the sum total (see Figure L.1)		N/A
	One of the distances was 1,0 mm or greater (see Annex A, cases 1 to 10)		N/A
	Force applied by means of test probe B of IEC 61032:1997 at the following values:		N/A
	– 2 N for bare conductors		N/A
	– 30 N for enclosures		N/A
	Means provided for securing the tool to a support considered to be accessible		N/A

IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict

8.12 A	TABLE: Label Heating Test			N/A
Test Conditions .....		Conditioned in oven for 24 h at (120 ± 2) °C Y/N Conditioned in oven for 200 h at: °C Y/N Amount of samples: 3		
Test Specimen	Material type	Good adhesion and no curling of edges	Label resists defacement and removal when scraped	
—	—	—	—	
Supplementary information:				

8.12 B	TABLE: Label immersion tests – Water			N/A
Test Conditions .....		Pre Treating for 24 h at relative humidity of 45 % and temperature: °C Time of labels in water: 48 h Amount of samples: 3		
Test Specimen	Material type	Good adhesion and no curling of edges	Label resists defacement and removal when scraped	
—	—	—	—	
Supplementary information:				

8.12 C	TABLE: Label immersion tests - Oil (IRM 903)			N/A
Test Conditions .....		Pre Treating for 24 h at relative humidity of 45 % and temperature: °C Time of labels in oil: 48 h Amount of samples: 3		
Test Specimen	Material type	Good adhesion and no curling of edges	Label resists defacement and removal when scraped	
—	—	—	—	
Supplementary information:				

8.12 D	TABLE: Label Standard atmosphere tests			N/A
Test Conditions ..... :		Time of labels in controlled atmosphere at relative humidity of 45%: 72h Controlled atmosphere temperature: °C Amount of samples: 3		
Test Specimen	Material type	Good adhesion and no curling of edges	Label resists defacement and removal when scraped	
—	—	—	—	
Supplementary information:				

<b>9.1</b>	<b>TABLE: Protection against access to live parts</b>				N/A
Measurement between relevant parts and poles of supply source	Rated voltage U (V)	Measured voltage (V)	Measured current (A)	Measured capacitance (µF)	
—	—	—	—	—	

IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict

Supplementary information:

11	TABLE: Input data under no-load conditions					P
Input deviation of/at:		Rated P (W)	Measured P (W)	Ratio (%)	Required ratio (%)	Remark
220.0V~, 50Hz		800	315.6	253.5	110	Tested on DL- DC26-E1
230.0V~, 50Hz			341.5	234.3		
240.0V~, 50Hz			373.0	214.5		
220.0V~, 60Hz			319.5	250.4		
230.0V~, 60Hz			349.5	228.9		
240.0V~, 60Hz			367.0	218.0		
220.0V~, 50Hz		1000	554.0	180.5	110	Tested on DL- DC28-E2
230.0V~, 50Hz			580.6	172.2		
240.0V~, 50Hz			595.3	168.0		
220.0V~, 60Hz			556.5	179.7		
230.0V~, 60Hz			608.0	164.5		
240.0V~, 60Hz			621.2	161.0		
Supplementary information: none.						

12.1A	TABLE: Temperature rise measurements under the conditions of 12.2 to 12.5			P
Test voltage (V).....:	206.8	254.4	—	
Ambient temperature, t <sub>1</sub> (°C):	18.6	18.6	—	
Ambient temperature, t <sub>2</sub> (°C):	19.5	19.8		
Operating time (min, s).....:	Operate intermittently for 30 cycles , 30s “on”, 90s”off”		—	
Speed (min <sup>-1</sup> ).....:	663	944	—	
Input Wattage (W) .....	730.1	863.0	—	
Input current (A) .....	3.789	3.586	—	
Torque (Nm) .....	5.682	4.808	—	
Thermocouple Locations		Temperature rise measured (K)	Temperature rise limit (K)	
Stator winding		91.6	68.4	115
Stator core		66.3	50.3	Ref.
Internal wire		19.5	14.1	50
Capacitor surface		1.4	1.0	60 (T-25)
Power cord		1.5	1.3	50

IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
Switch ambient	4.9	3.8	30
Brush holder	35.0	28.4	Ref.
Handle	1.2	0.7	50
Enclosure	25.7	22.6	60
Switch button	1.5	1.2	50
Supplementary information: tested on DL-DC26-E1.			

12.1A	TABLE: Temperature rise measurements under the conditions of 12.2 to 12.5			P
Test voltage (V).....:	206.8	254.4	—	—
Ambient temperature, $t_1$ (°C):	21.8	21.8	—	—
Ambient temperature, $t_2$ (°C):	20.9	21.5	—	—
Operating time (min, s).....:	Operate intermittently for 30 cycles, 30s “on”, 90s “off”			—
Speed ( $\text{min}^{-1}$ ).....:	748	1051	—	—
Input Wattage (W) .....	941.9	1127	—	—
Input current (A) .....	4.984	4.672	—	—
Torque (Nm) .....	6.204	5.119	—	—
Thermocouple Locations		Temperature rise measured (K)		Temperature rise limit (K)
Stator winding		94.6	73.7	115
Stator core		66.2	52.4	Ref.
Internal wire		25.8	21.9	50
Capacitor surface		5.8	4.4	60 (T-25)
Power cord		4.5	3.7	50
Switch ambient		13.1	11.1	30
Brush holder		45.7	48.2	Ref.
Handle		5.0	4.2	50
Enclosure		36.9	33.5	60
Switch button		8.2	7.3	50
Supplementary information: tested on DL-DC28-E2.				

12.1B	TABLE: Heating test, resistance method			P
	Test voltage (V).....:	206.8	254.4	—
	Ambient, $t_1$ (°C).....:	18.6	18.6	—
	Ambient, $t_2$ (°C).....:	19.5	19.8	—

IEC 62841-2-6					
Clause	Requirement + Test			Result - Remark	Verdict
Temperature rise of winding	R <sub>1</sub> (Ω)	R <sub>2</sub> (Ω)	ΔT measured (K)	ΔT Limit (K)	Insulation class
206.8V~, Armature winding (1- 4 plates)	1.713	2.404	101.2	115	Class 155
206.8V~, Stator winding	2.833	3.950	98.9	115	Class 155
254.4V~, Armature winding (1- 4 plates)	1.713	2.303	86.0	115	Class 155
254.4V~, Stator winding	2.833	3.643	71.2	115	Class 155
Supplementary information: 1) Tested on DL-DC26-E1. 2) Rotor winding (diagonal): 4.276Ω at 18.6°C.					

<b>12.1B</b>	<b>TABLE: Heating test, resistance method</b>				P
	Test voltage (V)..... :	206.8	254.4	—	
	Ambient, t <sub>1</sub> (°C)..... :			—	
	Ambient, t <sub>2</sub> (°C)..... :			—	
Temperature rise of winding	R <sub>1</sub> (Ω)	R <sub>2</sub> (Ω)	ΔT measured (K)	ΔT Limit (K)	Insulation class
206.8V~, Armature winding (1- 4 plates)	1.246	1.754	105.4	115	Class 155
206.8V~, Stator winding	2.012	2.795	100.6	115	Class 155
254.4V~, Armature winding (1- 4 plates)	1.246	1.674	88.3	115	Class 155
254.4V~, Stator winding	2.012	2.639	80.2	115	Class 155
Supplementary information: 1) Tested on DL-DC28-E2. 2) Rotor winding (diagonal): 2.805Ω at 21.8°C.					

13.1	TABLE: Ball Pressure Test of Thermoplastics				P
Allowed impression diameter (mm) .....			2.0		—
Object/ Part No.	Material	Manufacturer/ trademark	Test temperature (°C)	Impression diameter (mm)	
Enclosure	PA6-GF35	Zhejiang Hangbo Power Tools Co., Ltd.	125	1.24	
Rear cover	PA6-GF30		75	0.87	
Brush bracket	PA66-GF30		125	1.44	
Bobbin of motor	PA66		125	1.16	
Supplementary information: none.					

<b>13.2</b>	<b>TABLE: Glow Wire Test</b>					P
Object/ Part No.	Material	Manufacturer/ trademark	Test temperature (°C)	Material ignited, Yes/No	Layer under Test Sample ignited, Yes/No	Verdict

IEC 62841-2-6						
Clause	Requirement + Test			Result - Remark		Verdict
Enclosure	PA6-GF35	Zhejiang Hangbo Power Tools Co., Ltd.	550	No	No	P
Rear cover	PA6-GF30		550	No	No	P
Brush bracket	PA66-GF30		550	No	No	P
Bobbin of motor	PA66		550	No	No	P
Supplementary information: none.						

16	TABLE: Overload Protection of Transformers and Associated Circuits		N/A
Test voltage :	—	—	
Ambient temperature (°C) :	—	—	
Input current (A) / Input Wattage (W) :	—	—	
Applied short-circuit or overload:	—	—	
Measurement at:	Temperature rise (K)	Allowed Limit (K)	
—	—	—	
Supplementary Information:			

18.6.1	TABLE: Fault Condition Tests				N/A
	Ambient temperature (°C) .....		—		—
	Fuse-link Current (A)		—		—
Component	Fault Condition		Test Voltage (V)	Test Duration*	Comment/Result Test repeated Yes/No**
—	—		—	—	—
Supplementary Information: * Tests were continued until - a protective device operates, or - until steady conditions are established or - an open circuit occurs. ** Test was repeated on a second sample due to an intentionally weak part permanently open-circuited to terminate the test.					

<b>18.8.1A</b>	<b>TABLE: Performance levels of Safety Critical Functions</b>			N/A	
Type and purpose of SCF		Min. PL determined based on: <sup>1,2</sup>		Min. PL	Actual PL
Power switch – provide desired switch-off for rotary hammers in rotary hammer mode and drill only mode that require bracing in accordance with 8.14.1.101		1		evaluated using the fault conditions of 18.6.1 without loss of this SCF	
Provide desired direction of rotation for rotary hammers that require bracing in accordance with 8.14.1.101		1		c	—

IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
Any electronic control to pass the test of 18.3	1	a	—
Prevent exceeding thermal limits as in 18.4	1	a	—
Limit the torque to comply with 19.102	1	c	—
Power switch – prevent unwanted switch-on for rotary hammers in rotary hammer mode and drill only mode with $M_R \leq 25 \text{ Nm}^{(3)}$	1	a	—
Power switch – prevent unwanted switch-on for rotary hammers in rotary hammer mode and drill only mode with $M_R > 25 \text{ Nm}^{(3)}$	1	b	—
Power switch – provide desired switch-off for rotary hammers in rotary hammer mode and drill only mode with $M_R \leq 25 \text{ Nm}^{(3)}$	1	b	—
Power switch – provide desired switch-off for rotary hammers in rotary hammer mode and drill only mode with $M_R > 25 \text{ Nm}^{(3)}$	1	c	—
Prevent unwanted lock-on of the power switch function for rotary hammers in rotary hammer mode and drill only mode with $M_R \leq 25 \text{ Nm}^{(3)}$	1	b	—
Prevent unwanted lock-on of the power switch function for rotary hammers in rotary hammer mode and drill only mode with $M_R > 25 \text{ Nm}^{(3)}$	1	c	—
Prevent self-resetting as required in 23.3 for rotary hammers in rotary hammer mode and drill only mode with $M_R \leq 25 \text{ Nm}^{(3)}$	1	a	—
Prevent self-resetting as required in 23.3 for rotary hammers in rotary hammer mode and drill only mode with $M_R > 25 \text{ Nm}^{(3)}$	1	b	—
Supplementary Information: <sup>1</sup> IEC 62841-2-6 <sup>2</sup> For safety critical functions not listed in Table 4 of IEC 62841-1 and provided by electronic circuits, PL values were determined using the methods of ISO 13849-1. <sup>3</sup> as measured in accordance with 19.102			

<b>18.8.1B</b>	<b>TABLE: Software in Safety Critical Functions</b>	N/A
H.11.12.3 from IEC 60730-1:2010		
H.11.12.3	Measures to avoid errors	—
H.11.12.3.1	For controls with software Class B or C the V-model for the software life cycle was applied	—
	Measures used for software class C are inherently acceptable for software class B	—



IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
	Other methods applied if they incorporate disciplined and structured processes including design and test phases .....		—
H.11.12.3.2	Specification		—
H.11.12.3.2.1	Software safety requirements		—
H.11.12.3.2.1.1	The specification of the software safety requirements includes:		—
	<ul style="list-style-type: none"> <li>A description of each safety related function to be implemented, including its response time(s):               <ul style="list-style-type: none"> <li>functions related to the application including their related software classes</li> <li>functions related to the detection, annunciation and management of software or hardware faults</li> </ul> </li> </ul>		—
	<ul style="list-style-type: none"> <li>A description of interfaces between software and hardware</li> </ul>		—
	<ul style="list-style-type: none"> <li>A description of interfaces between any safety and non-safety related functions</li> </ul>		—
H.11.12.3.2.2	Software architecture		—
H.11.12.3.2.2.1	The description of software architecture shall include the following aspects:		—
	<ul style="list-style-type: none"> <li>Techniques and measures to control software faults/errors (refer to H.11.12.2)</li> </ul>		—
	<ul style="list-style-type: none"> <li>Interactions between hardware and software</li> </ul>		—
	<ul style="list-style-type: none"> <li>Partitioning into modules and their allocation to the specified safety functions</li> </ul>		—
	<ul style="list-style-type: none"> <li>Hierarchy and call structure of the modules (control flow)</li> </ul>		—
	<ul style="list-style-type: none"> <li>Interrupt handling</li> </ul>		—
	<ul style="list-style-type: none"> <li>Data flow and restrictions on data access</li> </ul>		—
	<ul style="list-style-type: none"> <li>Architecture and storage of data</li> </ul>		—
	<ul style="list-style-type: none"> <li>Time based dependencies of sequences and data</li> </ul>		—
H.11.12.3.2.2.2	The architecture specification was verified against the specification of the software safety requirements by static analysis. Acceptable methods are:		—
	<ul style="list-style-type: none"> <li>Control flow analysis</li> </ul>		—
	<ul style="list-style-type: none"> <li>Data flow analysis</li> </ul>		—

IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
	• Walk-throughs / design reviews		—
H.11.12.3.2.3.1	Based on the architecture design, software is suitably refined into modules. Software module design and coding are implemented in a way that is traceable to the software architecture and requirements		—
H.11.12.3.2.3.2	Software code is structured		—
H.11.12.3.2.3.3	Coded software is verified against the module specification, and the module specification is verified against the architecture specification by static analysis		—
H.11.12.3.2.4	Design and coding standards		—
	Program design and coding standards is consequently used during software design and maintenance		—
	Coding standards specify programming practice, proscribe unsafe language features, and specify procedures for source code documentation as well as for data naming conventions		—
H.11.12.3.3	Testing		—
H.11.12.3.3.1	Module design (software system design, software module design and coding)		—
H.11.12.3.3.1.1	A test concept with suitable test cases is defined based on the module design specification.		—
H.11.12.3.3.1.2	Each software module is tested as specified within the test concept		—
H.11.12.3.3.1.3	Test cases, test data and test results are documented		—
H.11.12.3.3.1.4	Code verification of a software module by static means includes such techniques as software inspections, walk-throughs, static analysis and formal proof		—
	Code verification of a software module by dynamic means includes functional testing, white-box testing and statistical testing		—
H.11.12.3.3.2	Software integration testing		
H.11.12.3.3.2.1	A test concept with suitable test cases is defined based on the architecture design specification		—
H.11.12.3.3.2.2	The software is tested as specified within the test concept		—

IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
H.11.12.3.3.2.3	Test cases, test data and test results are documented		—
H.11.12.3.3.3	Software validation		—
H.11.12.3.3.3.1	A validation concept with suitable test cases is defined based on the software safety requirements specification		—
H.11.12.3.3.3.2	The software is validated with reference to the requirements of the software safety requirements specification as specified within the validation concept.		—
	The software is exercised by simulation or stimulation of:		—
	• input signals present during normal operation		—
	• anticipated occurrences		—
	• undesired conditions requiring system action		—
H.11.12.3.3.3.4	Test cases, test data and test results are documented		—
H.11.12.3.4	Other Items		—
H.11.12.3.4.1	Tools, programming languages are assumed to be suitable if they comply with "increased confidence from use" according to IEC 61508-7, C.4.4	Only applicable for SCF with PL $\geq c$	—
H.11.12.3.4.2	Management of software versions: All versions are uniquely identified for traceability		—
H.11.12.3.4.3	Software modification		—
H.11.12.3.4.3.1	Software modifications are based on a modification request which details the following:		—
	• the hazards which may be affected		—
	• the proposed change		—
	• the reasons for change		—
H.11.12.3.4.3.2	An analysis is carried out to determine the impact of the proposed modification on functional safety.		—
H.11.12.3.4.3.3	A detailed specification for the modification is generated including the necessary activities for verification and validation, such as a definition of suitable test cases		—
H.11.12.3.4.3.4	The modification are carried out as planned		—

IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
H.11.12.3.4.3.5	The assessment of the modification is carried out based on the specified verification and validation activities. This may include:		—
	• a reverification of changed software modules		—
	• a reverification of affected software modules		—
	• a revalidation of the complete system		—
H.11.12.3.4.3.6	All details of modification activities are documented		—
H.11.12.3.5	For class C control functions: One of the combinations (a–p) of analytical measures given in the columns of table H.9 is used during hardware development.....:		—

23.1	TABLE: Critical components information (see attachment 1)					P
Object / part No.	Manufacturer/ trademark	Type / model	Technical data	Standard	Mark(s) of conformity <sup>1)</sup>	
—	—	—	—	—	—	

<sup>1)</sup> Provided evidence ensures the agreed level of compliance. See OD-CB2039.

24.1	TABLE: Length of supply cord				P
Manufacturer of Cable	Cable type	Nominal cross-section used (mm <sup>2</sup> )	Length of supply cord measured (m)		
—	H07RN-F	1.0	1.97		

Supplementary information: none.

24.5	TABLE: Nominal cross-section area of supply cord					P
Rated current (A) <sup>1</sup> :	—	Current measured during clause 12ff. (A):	4.927	Nominal cross-section required per table 6:	0.75mm <sup>2</sup>	
Manufacturer of Cable	Cable Type	Nominal cross-section used				
—	H07RN-F	1.0mm <sup>2</sup>				

Supplementary information: none.  
<sup>1</sup> Current measured during test of clause 12.1, if no current rating marked.

24.11	TABLE: Flexing and lifting				P
Weight of tool (kg):	3.165	> 10 000 flexings, sample turned about 90° (Yes/No):		Yes	
Weight attached to cable or cord (kg):	3.165	Cord guard slipped out after 10 completed 1 s lifts (Yes/No):		No	
Manufacturer of Cable	Cable type	No. of strands (total)	No. of strands (broken)	Deviation in %	

IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict

—	H07RN-F	L: 32 / N: 32	L: 0 / N: 0	0
Supplementary information: one.				

<b>24.12</b>	<b>TABLE: Cord guard</b>						P
Cable manufacturer	Cable type	Overall Ø of cord (mm)	Cord guard length min. (mm)	Cord guard length meas. (mm)	Mass attached (g)	Radius of curvature (mm)	
—	H07RN-F	8.06	40.3	60.16	650	15	
Supplementary information: none.							

<b>24.13</b>	<b>TABLE: Cord anchorage</b>						P
Manufacturer of Cable	Cable type	Cord is pulled 25 times at (N)	Cord is twisted for 1 min at (Nm)	Cord damaged	Longitudinal displacement	Conductors movement	
—	H07RN-F	60	0.25	No	0.48mm	0mm	
Supplementary information: none.							

<b>27.1</b>	<b>TABLE: Torque Test for screws and nuts</b>					P
Threaded part identification		Thread diameter (mm)	Column number (I, II, or III)	Applied torque (Nm)	Number of cycles (5 or 10)	
Handle		4.15	II	1.8	10	
		4.11	II	1.8	10	
Switch terminal		2.93	II	0.5	5	
Cord anchorage		3.92	II	1.2	10	
Supplementary information: none.						

<b>28.1</b>	<b>TABLE: Clearance And Creepage Distance Measurements</b>						P
clearance cl and creepage distance cr at/of:	Up (V)	U r.m.s. (V)	Required cl (mm)	cl (mm)	required cr (mm)	cr (mm)	
Two polarity of switch	—	220-240	2.5	6.0	3.0	6.0	
Internal wire to accessible surface of handle	—	220-240	4.0	4.9	4.0	4.9	
Wire terminal (wrapped a layer heat-shrinkable tube) to accessible surface of enclosure	—	220-240	4.0	4.1	4.0	4.1	
Motor terminal to accessible surface of enclosure	—	220-240	8.0	12.5	8.0	12.5	
Switch terminal to accessible surface of handle	—	220-240	8.0	17.7	8.0	17.7	

IEC 62841-2-6						
Clause	Requirement + Test			Result - Remark		Verdict
Switch terminal to accessible surface of handle through mould-hole	—	220-240	8.0	8.2	8.0	8.2
Brush to Internal wire to accessible screw	—	220-240	8.0	9.0	8.0	9.0
Brush holder to switch button	—	220-240	8.0	10.0	8.0	10.0
Live part of motor reversal device to accessible surface of enclosure	—	220-240	8.0	11.0	8.0	11.0
Rotor winding to output shaft	—	220-240	6.0	8.7	6.0	15.7
Commutator to output shaft	—	220-240	8.0	8.7	8.0	15.7
Rotor winding to Rotor core	—	220-240	2.0	2.1	2.0	2.1
Stator winding to stator core	—	220-240	2.0	2.1	2.0	2.1
Supplementary information: measured for DL-DC26-E1.						

28.1	TABLE: Clearance And Creepage Distance Measurements					P
clearance cl and creepage distance cr at/of:	Up (V)	U r.m.s. (V)	Required cl (mm)	cl (mm)	required cr (mm)	cr (mm)
Two polarity of switch	—	220-240	2.5	6.0	3.0	6.0
Internal wire to accessible surface of handle	—	220-240	4.0	4.9	4.0	4.9
Wire terminal (wrapped a layer heat-shrinkable tube) to accessible surface of enclosure	—	220-240	4.0	4.1	4.0	4.1
Motor terminal to accessible surface of enclosure	—	220-240	8.0	12.5	8.0	12.5
Switch terminal to accessible surface of handle	—	220-240	8.0	17.7	8.0	17.7
Switch terminal to accessible surface of handle through mould-hole	—	220-240	8.0	8.2	8.0	8.2
Brush to Internal wire to accessible screw	—	220-240	8.0	9.0	8.0	9.0
Brush holder to switch button	—	220-240	8.0	10.0	8.0	10.0
Live part of motor reversal device to accessible surface of enclosure	—	220-240	8.0	11.0	8.0	11.0
Rotor winding to output shaft	—	220-240	6.0	8.7	6.0	15.7
Commutator to output shaft	—	220-240	8.0	8.7	8.0	15.7

IEC 62841-2-6						
Clause	Requirement + Test			Result - Remark		Verdict
Rotor winding to Rotor core	—	220-240	2.0	2.5	2.0	2.5
Stator winding to stator core	—	220-240	2.0	2.5	2.0	2.5
Supplementary information: measured for DL-DC28-E2.						

28.2	TABLE: Distance Through Insulation Measurements				P
Distance through insulation dti at/of:		U r.m.s. (V)	Test voltage (V)	Required dti (mm)	dti (mm)
Roto core to shaft		220-240	—	1.0	1.25
Roto winding to shaft		220-240	—	1.0	2.1
Supplementary information: measured for DL-DC26-E1.					

28.2	TABLE: Distance Through DL-DC26-E1.Insulation Measurements				P
Distance through insulation dti at/of:		U r.m.s. (V)	Test voltage (V)	Required dti (mm)	dti (mm)
Roto core to shaft		220-240	—	1.0	1.1
Roto winding to shaft		220-240	—	1.0	2.0
Supplementary information: measured for DL-DC28-E2.					

C.2A	TABLE: Leakage Current of the non-operating tool as per clause 14.1					P
Points of application	Test voltage (rated V)	Freq. (Hz)	Selector Switch Position	Allowed leakage current (mA)	Measured leakage (mA)	
L/N – accessible enclosure	240.0	60	OFF	≤0.25	0.021	
Supplementary Information: none.						

C.2B	TABLE: Leakage Current of the non-operating tool as per clause 14.4					N/A
Points of application	Test voltage (rated V)	Freq. (Hz)	Selector Switch Position	Allowed leakage current (mA)	Measured leakage (mA)	
—	—	—	—	—	—	
Supplementary Information:						

<b>C.3A</b>	<b>TABLE: Leakage Current of the operating tool as per clause 12.1</b>					P
Points of application	Test voltage (1.06 X rated V)	Freq. (Hz)	Selector Switch Position (ON /OFF <sup>1</sup> )	Allowed leakage current (mA)	Measured leakage (mA)	
L/N – accessible enclosure (For DL-DC26-E1)	254.4	60	ON	≤0.25	0.016	

IEC 62841-2-6					
Clause	Requirement + Test			Result - Remark	Verdict
L/N – accessible enclosure (For DL-DC28-E2)	254.4	60	ON	≤0.25	0.019
Supplementary Information: none.					

C.3B	TABLE: Leakage Current of the operating tool as per clause 14.3					N/A
Points of application	Test voltage (rated V)	Freq. (Hz)	Selector Switch Position (ON /OFF <sup>1</sup> )	Allowed leakage current (mA)	Measured leakage (mA)	
—	—	—	—	—	—	
Supplementary Information:						

C.3C	TABLE: Leakage Current of the operating tool as per clause 18.5.1					P
Points of application	Test voltage (rated V)	Freq. (Hz)	Selector Switch Position (ON /OFF <sup>1</sup> )	Allowed leakage current (mA)	Measured leakage (mA)	
L/N – accessible enclosure (For DL-DC26-E1)	240.0	60	ON	≤2	0.442	
L/N – accessible enclosure (For DL-DC28-E2)	240.0	60	ON	≤2	0.424	
Supplementary Information: none.						

C.3D	TABLE: Leakage Current of the operating tool as per clause 18.5.4					N/A
Points of application	Test voltage (rated V)	Freq. (Hz)	Selector Switch Position (ON /OFF <sup>1</sup> )	Allowed leakage current (mA)	Measured leakage (mA)	
—	—	—	—	—	—	
Supplementary Information:						

D.2	TABLE: Dielectric Strength			P
Test voltage applied between:		Test during or after clause	Test potential applied (V)	Breakdown / flashover (Yes/No)
- windings and metal core of the motor field over <b>basic insulation</b>		12.6	1250	N/A
- commutator and metal core of the motor armature over <b>basic insulation</b>		12.6	1250	N/A
- metal core and motor armature spindle of the motor armature over <b>supplementary insulation</b>		12.6	2500	N/A
- commutator and motor armature spindle over <b>reinforced insulation</b>		12.6	3750	N/A



IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
- between live parts and other metal parts over <b>basic insulation</b>	14.1	1250	No
- between inaccessible metal parts and accessible parts over <b>supplementary insulation</b>	14.1	2500	No
- between live parts and accessible parts over <b>reinforced insulation</b>	14.1	3750	No
- accessible metal parts in class I tools and the supply cord wrapped with metal foil	14.1	1250	N/A
- accessible metal parts in class II tools and the supply cord wrapped with metal foil	14.1	1750	No
- between live parts and other metal parts over <b>basic insulation</b>	14.2.2	1250	N/A
- between inaccessible metal parts and accessible parts over <b>supplementary insulation</b>	14.2.2	2500	N/A
- between live parts and accessible parts over <b>reinforced insulation</b>	14.2.2	3750	N/A
- live parts and accessible parts over <b>basic insulation</b>	14.3	1250	N/A
- live parts and accessible parts over <b>reinforced insulation</b>	14.3	3750	N/A
- live parts and accessible parts over <b>basic insulation</b>	14.4	1250	N/A
- live parts and accessible parts over <b>reinforced insulation</b>	14.4	3750	N/A
- between live parts and other metal parts over <b>basic insulation</b>	17.2 and 17.3	937,5	No
- between inaccessible metal parts and accessible parts over <b>supplementary insulation</b>	17.2 and 17.3	1875	No
- between live parts and accessible parts over <b>reinforced insulation</b>	17.2 and 17.3	2812,5	No
- live parts and accessible parts over <b>basic insulation</b>	18.3 and 18.4	1250	N/A
- live parts and accessible parts over <b>reinforced insulation</b>	18.3 and 18.4	3750	No
- live parts and accessible parts not grounded, if the tool does not operate anymore	18.5.1	1500	No
- live parts and accessible parts not grounded, if the tool still operates	18.5.1	2500	N/A
- commutator segments and armature shaft in series motors with class II armature construction	18.5.2	1500	N/A
- live parts and accessible parts not grounded, if any winding is open circuited	18.5.4	1500	N/A
- live parts and accessible parts not grounded, if no windings are open circuited	18.5.4	2500	N/A

IEC 62841-2-6			
Clause	Requirement + Test	Result - Remark	Verdict
- live parts and accessible parts over <b>basic insulation</b>	20.2 to 20.4	1250	No
- live parts and accessible parts over <b>reinforced insulation</b>	20.2 to 20.4	3750	No
- between the handles and grasping surfaces in contact with foil and the output shaft of the tool	20.5	1250	No
- between live parts and other metal parts over <b>basic insulation</b>	21.12	937,5	N/A
- between inaccessible metal parts and accessible parts over <b>supplementary insulation</b>	21.12	1875	N/A
- between live parts and accessible parts over <b>reinforced insulation</b>	21.12	2812,5	N/A
- shafts of operating knobs, handles, levers etc. and their insulating covering wrapped in metal foil	21.29	1250	N/A
- live parts and accessible parts over <b>basic insulation</b>	22.6	1250	N/A
- live parts and accessible parts over <b>reinforced insulation</b>	22.6	3750	N/A
- basic insulation	28.2.b)	1250	N/A
- supplementary insulation	28.2.b)	2500	N/A
- reinforced insulation	28.2.b)	3750	N/A
- over insulation protecting from electric shock	K.9.5	750	N/A
Supplementary information: none.			

K12.1	TABLE: Normal Temperature Test for Battery Tool			N/A
Ambient temperature (°C) .....		—		—
Measurement at:		Temperature rise (K)	Allowed Limit (K)	
—		—	—	
Supplementary Information:				
Status of overload protector at end of test [ ] No change [ ] Opened during the Test [ ] N/A				

<b>K.18.1</b>	<b>TABLE: Battery Tool Abnormal Operation</b>					N/A
	Resistance applied (max. 10 mΩ)	Protective device operated during first test?	Test repeated 2 more times with device in place?	Test repeated 1 more time with device bridged?	Explosion, charring or burning of test materials?	
a) Terminals of detachable battery pack with exposed terminals shorted	—	—	—	—	—	
b) Motor terminals shorted	—	—	—	—	—	
c) Motor rotor locked	—	—	—	—	—	

IEC 62841-2-6					
Clause	Requirement + Test			Result - Remark	
d) Cord between battery tool and separable battery pack shorted	—	—	—	—	—
e) Cord between tool and charger shorted	—	—	—	—	—
f) Any two uninsulated parts of opposite polarity in battery tools shorted	—	—	—	—	—
Supplementary Information:					

K.18.201	TABLE: Lithium-ion charging systems – Abnormal Conditions					N/A
Abnormal conditions	Explosion occurred?	Charring or burning of test materials?	Upper limit charging voltage not exceeded by >150 mV <sup>1)</sup>	Charging system permanently disabled? <sup>2)</sup>	Cell vent damaged?	
a) Components in the charging system faulted as in 18.6.1 b) to f)	—	—	—	—	—	
b) One cell 50% charged in a fully discharged battery	—	—	—	—	—	
c) Charging of a series configured battery with all cells 50% charged, one cell shorted	—	—	—	—	—	
d) Short across a component or between adjacent PCB tracks	—	—	—	—	—	
Supplementary Information: One of conditions <sup>1)</sup> or <sup>2)</sup> is sufficient to achieve compliance with this subclause.						

L.18.1	TABLE: Battery Tool Abnormal Operation					N/A
Abnormal conditions	Resistance applied (max. 10 mΩ)	Protective device operated during first test?	Test repeated 2 more times with device in place?	Test repeated 1 more time with device bridged?	Explosion, charring or burning of test materials?	
a) Terminals of detachable battery pack with exposed terminals shorted	—	—	—	—	—	
b) Motor terminals shorted	—	—	—	—	—	
c) Motor rotor locked	—	—	—	—	—	
d) Cord between battery tool and separable battery pack shorted	—	—	—	—	—	
e) Cord between tool and charger shorted	—	—	—	—	—	
f) Any two uninsulated parts of opposite polarity in battery tools shorted	—	—	—	—	—	
Supplementary Information:						

<b>L.18.202</b>	<b>TABLE: Lithium-ion charging systems – Abnormal Conditions</b>					N/A
-----------------	--	--	--	--	--	-----

IEC 62841-2-6					
Clause	Requirement + Test			Result - Remark	Verdict
Abnormal conditions	Explosion occurred?	Charring or burning of test materials?	Upper limit charging voltage not exceeded by >150 mV <sup>1)</sup>	Charging system permanently disabled? <sup>2)</sup>	Cell vent damaged?
a) Components in the charging system faulted as in 18.6.1 b) to f)	—	—	—	—	—
b) One cell 50% charged in a fully discharged battery	—	—	—	—	—
c) Charging of a series configured battery with all cells 50% charged, one cell shorted	—	—	—	—	—
d) Short across a component or between adjacent PCB tracks	—	—	—	—	—
Supplementary Information: One of conditions <sup>1)</sup> or <sup>2)</sup> is sufficient to achieve compliance with this subclause.					

EUROPEAN GROUP DIFFERENCES			
Clause	Requirement + Test	Result - Remark	Verdict

<b>ATTACHMENT TO TEST REPORT IEC 62841-1</b> <b>EUROPEAN GROUP DIFFERENCES AND NATIONAL DIFFERENCES</b> <b>Electric Motor-Operated Hand-Held, Transportable Tools and Lawn and Garden Machinery - Safety -</b> <b>Part 1: General requirements</b>			
Differences according to ..... : EN 62841-1:2015 + AC.2015 + A11:2022			
Attachment Form No..... : EU_GD_IEC62841_1F			
Attachment Originator..... : DEKRA Certification B.V.			
Master Attachment..... : 2023-05-30			
Copyright © 2022 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved.			

	CENELEC COMMON MODIFICATIONS (EN)		—
8	MARKINGS AND INSTRUCTIONS		P
8.4	Replace the 2nd paragraph with the following:		—
	Markings specified in 8.2 and 8.3 are clearly discernible from the outside of the tool.		P
	Other markings on the tool may be visible after removal of a cover, provided that the location of the markings is readily accessible.		N/A
8.14	The words "Original instructions" appear on the language version(s) verified by the manufacturer or his authorised representative.	English	P
	Where no "Original instructions" exist in the official language(s) of the country where the tool is to be used, a translation into that/those language(s) is provided by the manufacturer or his authorised representative or by the person bringing the tool into the language area in question.		N/A
	The translations bear the words "Translation of the original instructions", and they are accompanied by a copy of the "Original instructions".		N/A
8.12	Markings easily legible		P
	Markings withstood durability test: - 15 s with water soaked cloth - 15 s with petroleum spirit soaked cloth		P
	Signs are in contrast to their background, clearly legible from a distance of not less than 500 mm		P
	Effect of normal use taken into account		P

EUROPEAN GROUP DIFFERENCES			
Clause	Requirement + Test	Result - Remark	Verdict
	Adhesive backing durable, meets requirements of Annex ZB or...		P
	... withstands specified tests		N/A
8.14.2 Za)	The noise emission, which is measured in accordance with I.2		P
	A-weighted sound pressure level $L_{pA}$ and its uncertainty $K_{pA}$ , where $L_{pA}$ exceeds 70 dB(A) $L_{pA}$ [dB(A)] .....: $K_{pA}$ [dB(A)] .....:	Considered	P
	Where $L_{pA}$ does not exceed 70 dB(A), this fact is indicated		N/A
	A-weighted sound power level $L_{WA}$ and its uncertainty $K_{WA}$ , where the A-weighted sound pressure level $L_{pA}$ exceeds 80 dB(A); $L_{WA}$ [dB(A)] .....: $K_{WA}$ [dB(A)] .....:	Considered	P
	peak C-weighted instantaneous sound pressure value $L_{pCpeak}$ , where this exceeds 63 Pa (130 dB in relation to 20 $\mu$ Pa) $L_{pCpeak}$ (dB) .....: $K_{pCpeak}$ (dB) .....:		N/A
	The vibration total value and its uncertainty which is measured in accordance with I.3.		P
	When the vibration total value exceeds 2,5 m/s <sup>2</sup> , its value is given in the instructions. Work mode - vibration emission value a (m/s <sup>2</sup> )....: Uncertainty K (m/s <sup>2</sup> ).....:	Considered	P
	When the vibration total value does not exceed 2,5 m/s <sup>2</sup> , this is stated.		N/A
	Information that the declared vibration total value has been measured in accordance with a standard test method and may be used for comparing one tool with another		P
	Information that the declared vibration total value may also be used in a preliminary assessment of exposure.		P
	A warning that the vibration emission during actual use of the power tool can differ from the declared total value depending on the ways in which the tool is used		P

EUROPEAN GROUP DIFFERENCES			
Clause	Requirement + Test	Result - Remark	Verdict
	A warning of the need to identify safety measures to protect the operator that are based on an estimation of exposure in the actual conditions of use (taking account of all parts of the operating cycle such as the times when the tool is switched off and when it is running idle in addition to the trigger time).		P
<b>18</b>	<b>ABNORMAL OPERATION</b>		P
18.8.1	In Table 4, replace the table footnote by the following: * Performance levels are to be specified in the relevant part of EN 62841-2, EN 62841-3 or EN 62841-4.		N/A
	Delete the 5th paragraph and the subsequent NOTE 3.		—
<b>21</b>	<b>CONSTRUCTION</b>		P
21.18.1	delete the 2nd paragraph.		—
21.18.1.Z1	Unless hand-held tools are equipped with a momentary power switch without lock-on device, voltage recovery following an interruption of the supply do not give rise to a hazard.		N/A
	The relevant part of EN 62841-2 specifies if this subclause applies and gives specific requirements.		N/A
21.18.2.1	Unless transportable tools are equipped with a momentary power switch without lock-on device, voltage recovery following an interruption of the supply do not give rise to a hazard.		N/A
	The relevant part of EN 62841-3 specifies if this subclause applies and gives specific requirements.		N/A
21.Z1	Noise reduction of tools as an integral part of the design process achieved by particularly applying measures at source to control noise, such as example EN ISO 11688-1:2009		P
	Success of the applied noise reduction measures assessed based on the actual noise emission values, measured in accordance with I.2, in relation to other machines of the same type with comparable non acoustical technical data		P
21.Z2	Vibration at the handles kept as low as possible without unduly affecting the performance or the ergonomics (weight, handling, etc.) of the tool.		P
	Vibration reduced by the application of engineering measures as given in CR 1030-1:1995		P

EUROPEAN GROUP DIFFERENCES			
Clause	Requirement + Test	Result - Remark	Verdict
	Success of the applied vibration measures is assessed by comparing the vibration levels for the tool, measured in accordance with I.3, with those for other tools of the same type and with a comparable specification and performance.		P
<b>ANNEX E</b>	<b>METHODS OF APPLYING ISO 13849-1 TO POWER TOOLS</b>		N/A
	(Void)		—
<b>ANNEX I</b>	<b>MEASUREMENT OF NOISE AND VIBRATION EMISSIONS</b>		P
	Replace the title of Annex I by the following <b>ANNEX I – (NORMATIVE)</b>		—
I.2	Noise test code (grade 2)		P
I.2.Z1	Noise reduction		P
I.2.1	General		P
	The noise emission determined by using a machine which has design and technical specifications replicating the machine concerned.		P
	The overall noise can be divided into the pure machine noise and the noise generated from the processed workpiece.		P
	The load conditions for particular tools are therefore specified in the relevant part of IEC 62841-2, IEC 62841-3 or IEC 62841-4.		P
I.2.2	Sound power level measured according to ISO 3744		P
I.2.2.2	Hand-held power tools		P
	For all hand-held power tools, the sound power level is determined by using a hemispherical / cylindrical measurement surface according to Figure I.2.		P
I.2.2.3	For all transportable power tools, the sound power level is determined by using a cubic measurement surface according to Figure I.3.		N/A
I.2.2.4	The sound power level of lawn and garden machinery is determined as specified in the relevant part of IEC 62841-4.		N/A
I.2.3	Emission sound pressure level determination		P
I.2.3.1	The A-weighted emission sound pressure level of hand-held tools at the work station $L_{pA}$ according to ISO 11203:2009 with $L_{pA} = L_{WA} - Q$ , in dB where $Q = 8$ , in dB.		P
	If required, $L_{pCpeak}$ is measured at each of the five measurement positions specified in I.2.2		N/A



EUROPEAN GROUP DIFFERENCES			
Clause	Requirement + Test	Result - Remark	Verdict
I.2.3.2	The A-weighted emission sound pressure level of transportable tools at the work station, LpA, is determined according to ISO 11201, grade 2.		N/A
	If required, the C-weighted peak emission sound pressure level LpCpeak is measured at the same operator's position as the A-weighted sound pressure level LpA.		N/A
I.2.3.3	The emission sound pressure level of lawn and garden machinery is determined as specified in the relevant part of IEC 62841-4.		N/A
I.2.4	Installation and mounting conditions of the power tools during noise tests		P
	The power tool under test is new and equipped with accessories which affect the acoustic properties, as recommended by the manufacturer.		P
	Prior to commencing testing, the power tool (including any required ancillary equipment) is set up in a stable condition in accordance with the manufacturer's instructions for safe use.		P
	A hand-held tool is held by the operator or suspended in such a way as to correspond to normal use, as specified in the relevant part of IEC 62841-2		P
	A transportable tool is so positioned, either placed on the test bench of Figure I.1		N/A
	Lawn and garden machinery is used and positioned as specified in the relevant part of IEC 62841-4.		N/A
I.2.5	Operating conditions		P
	Tools are tested under the two operating conditions "no-load" or "load" as appropriate for the type of tool and specified in the relevant part of IEC 62841-2, IEC 62841-3 or IEC 62841-4.		P
I.2.6	Measurement uncertainties		P
	Uncertainties according to standard determined, recorded and reported		P
I.2.7	Information and deviations are recorded.		P
I.2.8	Information to be reported		P
	- reference to this noise test code / basic standard		P
	- description of the power tool;		P
	- description of mounting and operating conditions		P

EUROPEAN GROUP DIFFERENCES			
Clause	Requirement + Test	Result - Remark	Verdict
	Sound power level $L_{WA}$ (dB(A)).....:	For DL-DC26-E1: $L_{WA}=104.07\text{dB(A)}$ , $K=3\text{dB(A)}$  For DL-DC28-E2: $L_{WA}=103.76\text{dB(A)}$ , $K=3\text{dB(A)}$	P
	Sound pressure level $L_{pA}$ (dB(A)).....:	For DL-DC26-E1: $L_{pA}=96.07\text{dB(A)}$ , $K=3\text{dB(A)}$  For DL-DC28-E2: $L_{pA}=95.76\text{dB(A)}$ , $K=3\text{dB(A)}$	P
	C-weighted peak emission sound pressure level $L_{pCpeak}$ (dB).....:		N/A
I.2.9	Declaration and verification of noise emission values		P
	Sound power level $L_{WA}$ (dB(A)).....:	For all models: $L_{WA}=104\text{dB(A)}$ , $K=3\text{dB(A)}$	P
	Sound pressure level $L_{pA}$ (dB(A)).....:	For all models: $L_{pA}=96\text{dB(A)}$ , $K=3\text{dB(A)}$	P
	C-weighted peak emission sound pressure level $L_{pCpeak}$ (dB).....:		N/A
I.3	Vibration		P
I.3.Z1	Vibration reduction		P
I.3.1	Vibration measurement – General		P
	Details for particular types of tools are given in the relevant part of IEC 62841-2, IEC 62841-3 or IEC 62841-4.		P
	The vibration total value may be determined by using the measurements from a machine which has design and technical specifications replicating the machine concerned.		P
I.3.2	Symbols		P
I.3.3	Characterization of vibration		P
I.3.3.1	Direction of measurement		P
	Directions may be defined in the relevant part of IEC 62841-2, IEC 62841-3 or IEC 62841-4.		P
	If not defined the three orthogonal directions X, Y and Z as shown in Figure I.4. are related		P
I.3.3.2	Location of measurement		P
	The measurement positions for particular types of tools are specified in the relevant part of IEC 62841-2, IEC 62841-3 or IEC 62841-4.		P

EUROPEAN GROUP DIFFERENCES			
Clause	Requirement + Test	Result - Remark	Verdict
I.3.3.3	Magnitude of vibration		P
I.3.3.4	Combination of vibration directions		P
I.3.4	Instrumentation requirements		P
	The vibration measurement equipment is in accordance with ISO 8041.		P
	Instrumentation for measuring other parameters whose characteristics are not covered by ISO 8041, is specified in the relevant part of IEC 62841-2, IEC 62841-3 or IEC 62841-4.		P
I.3.4.2	Transducers		P
I.3.5	Testing and operating conditions of the tool		P
I.3.5.1	Replace the 4th paragraph with the following:		P
	When the test procedure is not provided in a relevant part of EN 62841-2, EN 62841-3 or EN 62841-4, an operating condition is specified that is reproducible and representative of the noisiest operation in typical usage of the machine.		P
	The vibration test may simulate a single phase of a task or a working cycle, consisting of a set of operations where the operator is being exposed to vibration.		P
	However, the operating condition for the noise emission test is, if practicable, also used for the vibration test.		P
I.3.5.2	Attachment, workpiece and task		P
	Details for task and workpiece are given in the relevant part of IEC 62841-2, IEC 62841-3 or IEC 62841-4.		P
I.3.5.3	Operating conditions		P
	The relevant part of IEC 62841-2, IEC 62841-3 or IEC 62841-4 describes the modes of operation and the calculation of the declared emission value.		P
I.3.5.4	Operator		P
I.3.6	Measurement procedure and validity		P
I.3.6.1	Reported vibration values		P
	Details are specified in the relevant part of IEC 62841-2, IEC 62841-3 or IEC 62841-4.		P

EUROPEAN GROUP DIFFERENCES			
Clause	Requirement + Test	Result - Remark	Verdict
	Work mode - vibration emission value $a$ ( $m/s^2$ )....:	<p>For DL-DC26-E1:</p> <p>Hammer drilling into concrete:</p> <p>main handle:  <math>a_{h,HD}=10.64m/s^2</math>            auxiliary handle:  <math>a_{h,HD}=11.59m/s^2</math></p> <p>Chiselling:</p> <p>main handle:  <math>a_{h,NL}=11.02m/s^2</math>  <math>a_{h,CH}=10.39m/s^2</math>  <math>a_{h,Cheq}=10.52m/s^2</math>            auxiliary handle:  <math>a_{h,NL}=8.27m/s^2</math>  <math>a_{h,CH}=8.38m/s^2</math>  <math>a_{h,Cheq}=8.36m/s^2</math></p> <p>For DL-DC28-E2:</p> <p>Hammer drilling into concrete:</p> <p>main handle:  <math>a_{h,HD}=11.22m/s^2</math>            auxiliary handle:  <math>a_{h,HD}=10.90m/s^2</math></p> <p>Chiselling:</p> <p>main handle:  <math>a_{h,NL}=9.90m/s^2</math>  <math>a_{h,CH}=12.25m/s^2</math>  <math>a_{h,Cheq}=11.82m/s^2</math>            auxiliary handle:  <math>a_{h,NL}=8.55m/s^2</math>  <math>a_{h,CH}=11.16m/s^2</math>  <math>a_{h,Cheq}=10.69m/s^2</math></p>	P
	Uncertainty $K$ ( $m/s^2$ ).....:	$K=1.5m/s^2$ for above	P
I.3.6.2	Declaration of the vibration total value		P
	If required by the relevant part of IEC 62841-2, IEC 62841-3 or IEC 62841-4, the work mode description corresponding to the vibration emission is stated next to each declared value.		P

EUROPEAN GROUP DIFFERENCES			
Clause	Requirement + Test	Result - Remark	Verdict
	Work mode - vibration emission value $a$ ( $m/s^2$ )....:	For DL-DC26-E1 and DL-DC26-E2: Hammer drilling into concrete: $a_{h,HD}=11.59m/s^2$ Chiselling: $a_{h,Cheq}=10.52m/s^2$  For DL-DC28-E2 and DL-DC28-E3: Hammer drilling into concrete: $a_{h,HD}=11.22m/s^2$ Chiselling: $a_{h,Cheq}=11.82m/s^2$	P
	Uncertainty $K$ ( $m/s^2$ ).....:	$K=1.5m/s^2$ for above	P
I.3.7	Measurement report		P
	The report includes the following information:		P
	a) reference to this standard		P
	b) specification of the machine		P
	c) attachments or accessories;		P
	d) operating and testing conditions		P
	e) measuring institution		P
	f) date of measurement		P
	g) instrumentation		P
	h) position and fastening of transducers, measuring directions and individual vibration values when relevant		P
	i) the arithmetic mean total vibration $a_h$ , for each operator the total vibration value $a_{hv}$ and the three single axes weighted acceleration values $a_{hw}$ . It is good practice to report all the measured values		P
	j) the uncertainty $K$ of the vibration total value $a_h$ .		P
	Any deviations from the vibration test code in this standard is reported together with the technical justification for such deviations.		P
<b>ANNEX K</b>	<b>BATTERY TOOLS AND BATTERY PACKS</b>		N/A
K8.14.2 Z1	For battery tools with integral battery: instruction, how the integral battery can be removed safely from the tool after the tool's end of life, and information about the type of battery such as Li-Ion, NiCd and NiMH.		N/A

EUROPEAN GROUP DIFFERENCES			
Clause	Requirement + Test	Result - Remark	Verdict
<b>ANNEX L</b>	<b>BATTERY TOOLS AND BATTERY PACKS PROVIDED WITH MAINS CONNECTION OR NON-ISOLATED SOURCES</b>		N/A
K8.14.2 Z1	For battery tools with integral battery: instruction, how the integral battery can be removed safely from the tool after the tool's end of life, and information about the type of battery such as Li-Ion, NiCd and NiMH.		N/A
<b>ANNEX ZB</b>	<b>DURABILITY REQUIREMENTS FOR ADHESIVE LABELS</b>		N/A
ZB.1	This annex covers adhesive-attached labels for use as permanent nameplates or markers	Approved by UL 969	N/A
ZB.2	Performance		N/A
ZB.2.1	Labels applied or bonded to representative test surfaces and exposed to the applicable conditions described in ZB.5 show permanence and legibility as per Table ZB.1.		N/A
	Visual examination The labels are viewed with normal vision from a distance of (500 ± 50) mm		N/A
	A label shall adhere to the test surface without any significant curling or loosening around the perimeter greater than 10 % of the label area, or other indication of loss of adhesion such as wrinkles or bubbles. It shall not excessively craze, shrink more than 10 % of the label area or slip from its original position on the test panel more than 5 mm.		N/A
	Overlamination, if present, shows no separation, excessive darkening or shrinkage of more than 10 % of the label area		N/A
	Printing legible, no significant deterioration of legibility such as fading or bleeding; significant change in print colours to be noted		N/A
	Legibility test Printed surfaces of labels are rubbed with thumb or finger back and forth ten times with a downward force of approximately 18 N and then examined for legibility as in the visual examination.		N/A
	Subsurface printed labels and labels in which printing is protected by an overlamination are not subject to the legibility test		N/A
	Printing legible, no significant deterioration or blurring of legibility		N/A

EUROPEAN GROUP DIFFERENCES			
Clause	Requirement + Test	Result - Remark	Verdict
	Defacement test Labels are scraped back and forth ten times across printed areas and edges, with a downward force of between 7,2 N and 9 N using the edge of a 1,65 mm to 2,5 mm thick steel blade held at a right angle to the test surface, the portion of the blade contacting the test surface having a radius of curvature of 25 mm to 33 mm and the edges of the blade being rounded to a radius of 0,41 mm $\pm$ 0.08 mm		N/A
	Label, including overlamination or overprint coating, if present, remains in place and is not torn, uplifted, or otherwise damaged		N/A
	Scratching or defacement of unprotected printing, either text or background, is not considered a noncompliance.		N/A
	Adhesion test (see ZB.6) Test conducted if it is possible to remove test strips from surfaces		N/A
	If removal as described in ZB.6 is not possible because of breaking, tearing, or excessive rigidity of the label material, adhesion is determined by attempting to remove the entire sample by hand.		N/A
	Average quantitative adhesion value not less than 0,088 N/mm width at any point		N/A
	Adhesion not less than 0,0175 N/mm at any point		N/A
	In case it is not possible to separate test strips from the surface, sample shows good adhesion to the surface when removal by hand is attempted		N/A
ZB.2.2	If after any exposure condition the test surface excessively warps, bubbles, deteriorates, melts, chips, or otherwise renders it impossible to determine compliance of the <b>label</b> with the requirements of this Annex, the evaluation of the sample applied to the test surface is considered to be inconclusive.		N/A
ZB.2.3	Samples are representative of the construction of the label to be tested. Significant construction variables such as top-surface or subsurface printing; top coating; face stock; overlamination or adhesive thickness range; partial adhesive coverage; differing types or colours of similar face stock or adhesive (for example, clear, pigmented, or metallized); and alternative printing processes and inks (including floodcoating for subsurface printed constructions) are represented in the samples provided.		N/A

EUROPEAN GROUP DIFFERENCES			
Clause	Requirement + Test	Result - Remark	Verdict
ZB.2.4	The minimum recommended sample size is 50 mm x 50 mm		N/A
ZB.3	Test surfaces		N/A
ZB.3.1	Test surface panels provided for each material on which the samples are to be tested		N/A
	Panels are essentially flat, smooth, and rigid, and measure approximately 75 mm x 280 mm		N/A
	Larger panels that can be cut, or smaller panels, if sufficient in number, may be used.		N/A
	If samples are investigated for use on a curved surface, curved surfaces or tubing of representative radius are provided.		N/A
	When samples are investigated for use on a textured surface, panels of the specific textured surface are provided.		N/A
ZB.3.2	Test surfaces is cleaned as described in ZB.3.3 to ZB.3.4, before the samples are applied		N/A
ZB.3.3	Test panel is repeatedly wiped with cheesecloth (bleached cotton gauze) dampened with denatured ethyl alcohol or isopropanol until it appears clean; surface then wiped once more, with the dampened cheesecloth turned to expose a clean area, and then allowed to dry in air for at least 1 min		N/A
ZB.3.4	If alcohol affects the surface or is not considered the solvent of choice for a particular test surface:		N/A
	– An alternative solvent that does not affect the surface or leave a film is used; or		N/A
	– A detergent and water solution is used, after which the surface is thoroughly rinsed with demineralized water, wiped with clean dry cheesecloth, and allowed to dry in air for 1 h		N/A
ZB.4	Application of labels to surfaces		N/A
ZB.4.1	Two or more samples of a particular construction are applied to one or more panels of a test surface material for each exposure.		N/A
	Separate panels used for each exposure; number of samples applied to a panel may vary, depending upon sample size, and panel size		N/A
ZB.4.2	Samples applied to the test surface panels are stored at (23 ± 5) °C and a relative humidity of 50 % ± 20 % until they are subjected to the applicable exposure conditions.		N/A
ZB.5	Exposure conditions		N/A



EUROPEAN GROUP DIFFERENCES			
Clause	Requirement + Test	Result - Remark	Verdict
ZB.5.1	Labels subjected to each of the conditions given in Table ZB.2: – 72 h in a standard atmosphere (as received); – 24 h in a standard atmosphere followed by immersion in demineralized water for $(48 \pm 0,5)$ h at $(23 \pm 2)$ °C (water immersion); – 24 h in a standard atmosphere followed by $(240 \pm 1)$ h in an air-circulating oven at the test temperature corresponding to the maximum temperature rating (elevated temperature); – 24 h in a standard atmosphere followed by $(7 \pm 0,25)$ h in a cold box maintained at the temperature $(\pm 2)$ °C corresponding to the minimum temperature rating (low temperature)		N/A
ZB.5.2	Test temperatures applicable to the maximum temperature rating are given in Table ZB.3 .....		N/A
ZB.5.3	Labels are conditioned for at least 24 h in a standard atmosphere of $(23 \pm 2)$ °C and a relative humidity of $50 \% \pm 10 \%$		N/A
	Samples are then immersed in IRM903 lubricating oil for $(48 \pm 0,5)$ h		N/A
	After being immersed, samples are evaluated in accordance with the water immersion exposure in Table ZB.2 for compliance with the requirements in Table ZB.1 except that label panels removed from the lubricating oil are permitted to drain up to 5 min before being evaluated		N/A
	When exposure to the oil should be avoided, the legibility test (see Table ZB.1) is conducted using a thin, smooth-surfaced latex or nitrile rubber glove		N/A
Z.6	Adhesion test		N/A
	Samples tested as specified		N/A

EUROPEAN GROUP DIFFERENCES			
Clause	Requirement + Test	Result - Remark	Verdict

<p align="center"><b>ATTACHMENT TO TEST REPORT</b>  <b>IEC 62841-2-6:2020</b>  <b>EUROPEAN GROUP DIFFERENCES AND NATIONAL DIFFERENCES</b>  <b>Electric motor-operated hand-held tools, transportable tools and lawn and garden machinery</b>  <b>- Safety -</b>  <b>Part 2-6: Particular requirements for hand-held hammers</b></p>			
<p>Differences according to .....: EN IEC 62841-2-6:2020  to be used in conjunction with EN 62841-1:2015 + A11:2022</p>			
<p>TRF template used.....: IEC EE OD-2020-F2:2020, Ed. 1.1</p>			
<p>Attachment Form No.....: EU_GD_IEC62841_2_6B</p>			
<p>Attachment Originator.....: DEKRA Certification B.V.</p>			
<p>Master Attachment.....: Dated 2023-08-04</p>			
<p>Copyright © 2023 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved.</p>			

	<b>CENELEC COMMON MODIFICATIONS (EN)</b>	—
<b>ANNEX I</b>	<b>MEASUREMENT OF NOISE AND VIBRATION EMISSIONS</b>	P
	Replace the title of Annex I by the following <b>ANNEX I - (NORMATIVE)</b>	—
I.2	Noise test code (grade 2)	P
	This clause of Part 1 is applicable except as follows:	—
I.2.2.2	Hand-held power tools	P
	<i>Additional subclauses:</i>	—
I.2.2.2.101	Percussion hammers	N/A
	The sound power level shall be determined by using a hemispherical measurement surface according to Figure I.101. The location of the six microphone positions distributed on the surface of the hemisphere of radius <i>r</i> are listed in the form of Cartesian coordinates in Table I.101.	N/A
I.2.2.2.102	Rotary hammers	P
	For rotary hammers, I.2.2.2 of Part 1 applies.	P
I.2.4	Installation and mounting conditions of the power tools during noise tests	P
I.2.4.101	Percussion hammers are fixed in vertical position to the test equipment described in I.2.5.101.	N/A

EUROPEAN GROUP DIFFERENCES			
Clause	Requirement + Test	Result - Remark	Verdict
I.2.4.102	Rotary hammers are held by the operator for drilling vertically down in accordance with I.2.5.102.		P
I.2.5	Operating conditions		P
	<i>Addition:</i> The temperature requirements of 5.6 are not applicable.		P
	For battery operated tools, the tests are conducted with the lightest battery in accordance with K.8.14.2 e) 2).		N/A
I.2.5.101	Percussion hammers		N/A
	Percussion hammers shall be coupled during the test run to a tool embedded in a cube-shaped concrete block placed in a concrete pit, sunk into the ground.		N/A
	The block shall be in the shape of a cube ( $600 \pm 2$ ) mm long at the edge and as regular as possible; it shall be made of reinforced concrete and thoroughly vibrated in layers of up to 200 mm to avoid excessive sedimentation.		N/A
	The quality of the concrete shall correspond to C 50/60 of EN 206:2013.		N/A
	The cube shall be reinforced by 8 mm-diameter steel rods without ties, each rod being independent of the other; the design concept is illustrated in Figure I.102.		N/A
	The support tool shall be sealed into the block and shall consist of a rammer of no less than 178 mm or no more than 220 mm diameter and a tool chuck component identical to that normally used with the appliance being tested. Its upper end protruding above the screening slab (see dimension "X" in Figure I.103) shall be as short as possible, while allowing for a sufficient distance between the tool chuck and the screening slab (key item 2 in Figure I.103).		N/A
	The exposed part of the support tool between the tool chuck and the screening slab shall be covered by noise absorbing material.		N/A
	Suitable treatment shall be carried out to integrate the two components of the support tool. The support tool shall be fixed in the block so that the bottom of the rammer is 300 mm from the upper face of the block (see Figure I.102).		N/A

EUROPEAN GROUP DIFFERENCES			
Clause	Requirement + Test	Result - Remark	Verdict
	The block shall remain mechanically sound, particularly at the point where the support tool and the concrete meet. Before and after each test, it shall be established that the tool sealed in the concrete block is integrated with it.		N/A
	The cube shall be set in a pit cemented throughout, covered by a screening slab of at least 100 kg/m <sup>2</sup> , as indicated in Figure I.103, so that the upper surface of the screening slab is flush with the ground. To avoid any parasitic noise, the block shall be insulated against the bottom and the sides of the pit by elastic blocks, the cut-off frequency of which shall not be more than half the striking rate of the appliance tested, expressed as strokes per second.		N/A
	The opening in the screening slab through which the tool chuck component passes shall be as small as possible and sealed by a flexible sound-proof joint.		N/A
	All speed setting devices shall be adjusted to the highest value.		N/A
	The percussion hammer is tested under load, connected to the support tool. The feed force applied to the hammer by an appropriate fixture shall be sufficient to achieve stable operation.		N/A
I.2.5.102	Rotary hammers		P
	For rotary hammers, the speed setting shall be that recommended by the manufacturer for the drill bit size defined for the test for hammer drilling in concrete.		P
	Rotary hammers are tested under load as shown in Figure I.104 and in accordance with the conditions shown in Table I.102.		P
I.3	Vibration		P
	This clause of Part 1 is applicable except as follows:		—
I.3.3.2	Location of measurement		P
	<i>Addition:</i> Figure I.105 and Figure I.106 show the positions for different types of hammers.		P
I.3.5.1	General		P

EUROPEAN GROUP DIFFERENCES			
Clause	Requirement + Test	Result - Remark	Verdict
	<i>Addition:</i> For battery operated tools, the tests are conducted with the lightest battery in accordance with K.8.14.2 e) 2) that has a sufficient capacity to – operate the tool as specified in Table I.106 for at least 5 min; or – complete fifteen measurements as specified in Table I.107.		N/A
I.3.5.3	Operating conditions		P
	<i>Addition:</i> If rotary hammers have a separate percussion only mode, they shall be tested both in the percussion only and in the rotary hammer mode according to I.3.5.3.101 and I.3.5.3.102.		P
I.3.5.3.101	Hammers with percussion only mode		P
	Percussion hammers and rotary hammers with a percussion only mode are first tested under load in the loading device shown in Annex AA and in accordance with the conditions shown in Table I.106, all speed setting devices adjusted to the highest value.		P
	Annex AA specifies all details of the loading device depending on the size of the hammer and its connection end.		P
	In addition, the hammers are equipped with a typical bull point chisel and tested five times under "no load" for a minimum of 8 s each, by lifting the hammer up so that its weight is totally supported by the hands of the operator.		P
	The no load measurements may be done in rotation with the load measurements or as a separate test sequence.		P
I.3.5.3.102	Rotary hammers		P
	For rotary hammers, the speed setting shall be that recommended by the manufacturer for the drill bit size defined for the test for hammer drilling in concrete.		P
	Rotary hammers are tested under load as shown in Figure I.104 and in accordance with the conditions shown in Table I.107.		P
I.3.6.1	Reported vibration value		P
	<i>Replacement:</i>		—

EUROPEAN GROUP DIFFERENCES			
Clause	Requirement + Test	Result - Remark	Verdict
	Three series of five consecutive tests shall be carried out using a different operator for each series. If it can be shown that the vibration is not affected by operator characteristics, it is acceptable to perform all 15 measurements with one operator only.		P
	The measurements are made in three axes and the results of each direction shall be combined using Equation (I.3) to obtain the vibration total value $a_{hv}$ .		P
	The measurement result $a_h$ shall be determined as the arithmetic mean of vibration total values over the tests and operators.		P
	<p>If more than one operating mode was measured, the result <math>a_h</math> for each operating mode applicable shall be reported:</p> <p> <math>a_{h,HD}</math> = mean vibration "hammer drilling" in accordance with I.3.5.3.102;  <math>a_{h,CH}</math> = mean vibration "chiselling" on loading device in accordance with I.3.5.3.101;  <math>a_{h,NL}</math> = mean vibration "no load" in accordance with I.3.5.3.101;  <math>a_{h,Cheq}</math> = <math>[0,2 (a_{h,NL})^2 + 0,8 (a_{h,CH})^2]^{0,5}</math>  = equivalent chiselling value (representing time contents of 20 % with no load and 80 % with full load). </p>		P
I.3.6.2	Declaration of the vibration total value		P
	<p><i>Addition:</i></p> <p>The vibration total value of the handle with the highest emission and the uncertainty <math>K</math> shall be declared:</p> <ul style="list-style-type: none"> <li>– for <b>rotary hammers</b> without percussion only mode the value of <math>a_{h,HD}</math>, with the work mode description "hammer drilling into concrete";</li> <li>– for <b>rotary hammers</b> with percussion only mode the value of <math>a_{h,HD}</math>, with the work mode description "hammer drilling into concrete" and the value of <math>a_{h,Cheq}</math>, with the work mode description "chiselling";</li> <li>– for <b>percussion hammers</b> the value of <math>a_{h,Cheq}</math>, with the work mode description "chiselling".</li> </ul>		P
I.3.7	Measurement report		P
	<p><i>Replacement of item d):</i></p> <p>d) operating and testing conditions (voltage, current, feed force applied for each measurement, the force applied to the stamper due to vacuum for air-cooling, speed setting, duration and number of test runs, etc.);</p>		P
<b>ANNEX K</b>	<b>BATTERY TOOLS AND BATTERY PACKS</b>		N/A
	Add the following new subclause:		—
<b>K.21.18.Z1 01</b>	<b>Isolation and disabling device</b>		N/A

EUROPEAN GROUP DIFFERENCES			
Clause	Requirement + Test	Result - Remark	Verdict
	<b>Rotary hammers</b> with an <b>integral battery</b> shall be equipped — with an isolation device to prevent the risk of injury from mechanical hazards during servicing or <b>user maintenance</b> ; or — with a disabling device that prevents unintentional starting of the tool. An isolation device shall — provide disconnection of all poles of the <b>battery</b> from the serviceable region of the tool; — be equipped with an unambiguous indication of the state of the disconnection device which corresponds to each position of its manual control (actuator); — be provided with protection against accidental reconnection.		N/A
	A disabling device may be achieved by any of the following: — a self-restoring or non-self-restoring lock-off device where two separate and dissimilar actions are necessary before the motor is switched on (e.g. a <b>power switch</b> which has to be pushed in before it can be moved laterally to close the contacts to start the motor). It shall not be possible to achieve these two actions with a single grasping motion or a straight-line motion; — a removable disabling device provided with the tool where it shall not be possible for the tool to be operated when either applied or removed.		N/A
	Compliance is checked by inspection.		N/A
<b>ANNEX L</b>	<b>BATTERY TOOLS AND BATTERY PACKS PROVIDED WITH MAINS CONNECTION OR NON-ISOLATED SOURCES</b>		N/A
	<b>Add</b> the following new subclause:		—
<b>L.21.18.Z101</b>	<b>Isolation and disabling device</b>		N/A
	<b>Rotary hammers</b> with an <b>integral battery</b> shall be equipped — with an isolation device to prevent the risk of injury from mechanical hazards during servicing or <b>user maintenance</b> ; or — with a disabling device that prevents unintentional starting of the tool. An isolation device shall — provide disconnection of all poles of the <b>battery</b> from the serviceable region of the tool; — be equipped with an unambiguous indication of the state of the disconnection device which corresponds to each position of its manual control (actuator); — be provided with protection against accidental reconnection.		N/A

EUROPEAN GROUP DIFFERENCES																			
Clause	Requirement + Test	Result - Remark	Verdict																
	A disabling device may be achieved by any of the following: — a self-restoring or non-self-restoring lock-off device where two separate and dissimilar actions are necessary before the motor is switched on (e.g. a <b>power switch</b> which has to be pushed in before it can be moved laterally to close the contacts to start the motor). It shall not be possible to achieve these two actions with a single grasping motion or a straight-line motion; — a removable disabling device provided with the tool where it shall not be possible for the tool to be operated when either applied or removed.		N/A																
	Compliance is checked by inspection.		N/A																
<b>ANNEX AA</b>	<b>LOADING DEVICE</b>		P																
	Replace the title of Annex AA with the following <b>ANNEX AA</b> <b>(NORMATIVE)</b>		—																
<b>ANNEX ZA</b>	<b>NORMATIVE REFERENCES TO INTERNATIONAL PUBLICATIONS WITH THEIR CORRESPONDING EUROPEAN PUBLICATIONS</b>		P																
	Add the following annex: <b>ANNEX ZA</b> <b>(NORMATIVE)</b>		—																
	The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.		P																
	<p>This annex from Part 1 is applicable, except as follows:</p> <table border="1"> <tr> <td>Publication</td><td>Year</td><td>EN/HD</td><td>Year</td></tr> <tr> <td>Addition:</td><td>--</td><td>EN 206</td><td>2013</td></tr> <tr> <td>Title</td><td colspan="3">Concrete - Specification, performance, production and conformity</td></tr> <tr> <td>--</td><td>--</td><td>+A1</td><td>2016</td></tr> </table>	Publication	Year	EN/HD	Year	Addition:	--	EN 206	2013	Title	Concrete - Specification, performance, production and conformity			--	--	+A1	2016		P
Publication	Year	EN/HD	Year																
Addition:	--	EN 206	2013																
Title	Concrete - Specification, performance, production and conformity																		
--	--	+A1	2016																
<b>ANNEX ZZ</b>	<b>RELATIONSHIP BETWEEN THIS EUROPEAN STANDARD AND THE ESSENTIAL REQUIREMENTS OF DIRECTIVE 2006/42/EC [2006 OJ L157] AIMED TO BE COVERED</b>		P																
	Add the following annex: <b>ANNEX ZZ</b> <b>(INFORMATIVE)</b>		—																



EUROPEAN GROUP DIFFERENCES			
Clause	Requirement + Test	Result - Remark	Verdict
	This European Standard has been prepared under a Commission's standardization request M/396 to provide one voluntary means of conforming to essential requirements of Directive 2006/42/EC of the European Parliament and of the Council of 17 May 2006 on machinery, and amending Directive 95/16/EC.		P
	Once this standard is cited in the Official Journal of the European Union under that Directive, compliance with the normative clauses of this standard given in Table ZZ.1 confers, within the limits of the scope of this standard, a presumption of conformity with the corresponding essential requirements of that Directive, and associated EFTA regulations.		P
	<b>WARNING 1:</b> Presumption of conformity stays valid only as long as a reference to this European standard is maintained in the list published in the Official Journal of the European Union. Users of this standard should consult frequently the latest list published in the Official Journal of the European Union.		P
	<b>WARNING 2:</b> Other Union legislation may be applicable to the product(s) falling within the scope of this standard.		P

- END OF TEST REPORT -

**TÜV Rheinland Group****Critical component list**

Page 1 of 3

License holder	: Ningbo Deli tools Co., Ltd. No.128, Chezhan West Road, Huangtan Town, Ninghai County, Ningbo, 315000 Zhejiang P.R. China
Factory	: Zhejiang Hangbo Power Tools Co., Ltd. No.1255, East Tiychang Road, Bantan Industrial Zone, Jiaojiang District Taizhou City, 318000 Zhejiang P.R. China
Type of Appliance	: Electric hammer
Type Designation	: 1) DL-DC26-E1, DL-DC26-E2 2) DL-DC28-E2, DL-DC28-E3
Rating	: 1) 220-240V~, 50-60Hz, 800W 2) 220-240V~, 50-60Hz, 1000W
Protection Class	: Class II
Supply connection	: <input checked="" type="checkbox"/> fixed power cord <input type="checkbox"/> permanent connection <input type="checkbox"/> appliance inlet <input type="checkbox"/> direct plug in <input type="checkbox"/> battery operated
Please tick above box <input checked="" type="checkbox"/> when applicable	
Additional information	: Continuous operation Enclosure material: PA6-GF30

**Critical Components**

Material: e.g. external enclosure, PCB, closed-end connector, sleeves, cord anchorage etc

Components with winding: e.g. motor, transformer, magnetic coil etc.

Other components: e.g. switch, thermostat, heater, plug, internal wire, capacitor, relay, varistor etc.

Object/part No.	Manufacturer/ trademark	Type/ model	Technical data	Standard	Mark(s) of conformity
Motor (For DL-DC26-E1 and DL-DC26-E2)	Zhejiang Hangbo Power Tools Co., Ltd.	--	Stator winding: 2.833Ω x 2 (18.6°C) Rotor winding: 4.276Ω (18.6°C, diagonal) Class 155	EN 62841-1 EN IEC 62841-2-6	Tested with appliance
Motor (For DL-DC28-E2 and DL-DC28-E3)	Zhejiang Hangbo Power Tools Co., Ltd.	--	Stator winding: 2.012Ω x 2 (21.8°C) Rotor winding: 2.805Ω (21.8°C, diagonal) Class 155	EN 62841-1 EN IEC 62841-2-6	Tested with appliance

**TÜV Rheinland Group**

2024.05.30

Stephen Xu

**Date****Name****Signature**

## Critical component list

Page 2 of 3

Power plug and power cord	Wenling Antong Electric Appliance Co., Ltd.	AT-07A	AC 250V, 16A	DIN VDE 0620-2-1	VDE 40029138
		H07RN-F	2 x 1.0mm <sup>2</sup>	DIN EN 50525-2-21	VDE 40017864
(Alternative)	Zhejiang Anda Electric Wire and Cable Co., Ltd.	AD-001	AC 250V, 16A	DIN VDE 0620-1	VDE 40025050
		H07RN-F	2 x 1.0mm <sup>2</sup>	DIN EN 50525-2-21	VDE 40049698
(Alternative)	Shanghai Chuangqi Cable Co., Ltd.	CQ-01	AC 250V, 16A	DIN VDE 0620-2-1	VDE 40026406
		H07RN-F	2 x 1.0mm <sup>2</sup>	DIN EN 50525-2-21	VDE 40025408
BS non-rewireable plug and power cord (For UK market)	Yongkang Kangda Electric Appliance Co., Ltd.	KD-368	AC 250V	BS 1363-1	BSI KM 71081
	Shaoxing Nanyang Cable Co., Ltd.	H07RN-F	2 x 1.0mm <sup>2</sup>	DIN EN 50525-2-21	VDE 40016379
BS rewireable plug (For UK market)	Yongkang Kangda Electric Appliance Co., Ltd.	KD-166	AC 250V, 13A	BS 1363-1	BSI KM 71081
(Alternative)	Hangzhou Hongshi Electrical Co., Ltd.	SW 258	AC 250V, 13A	BS1363-1	BSI KM 95288
Fuse for BS Plug	Dongguan Cooper Electronic Co., Ltd.	TDC180	AC 240V, 10A or 13A	BS 1362	Intertek ASTA 658
(Alternative)	Group Talents Limited	SEM 11-10A	AC 240V, 10A	BS 1362	BSI KM 21062
Switch	Zhejiang Changlong Electric Co., Ltd.	FA2-4/1BEK-5	250V~, 6(6)A, 5E4	EN 61058-1-2	TÜV Rh R 50271936
		FA2-4/1BEK-6	250V~, 6(6)A, 5E4	EN IEC 61058-1	
(Alternative)	Ruian Angu Electrical Equipment Co., Ltd.	RG18	250V~, 8(6)A, 5E4	EN 61058-1-2 EN IEC 61058-1	TÜV Rh R 50310763
		RG601	250V~, 6(6)A, 5E4	EN 61058-1-2	TÜV Rh R 50310773
		RG602	250V~, 6(6)A, 5E4	EN IEC 61058-1	
(Alternative)	Yueqing Feihong Technology Co., Ltd.	FA12-6/E-K11	250V~, 6(6)A, 5E4	EN 61058-1-2	TÜV Rh R 50568487
		FA12-6/E-K12		EN IEC 61058-1	

**Critical component list**

Page 3 of 3

X2 Capacitor	Aid Electronic Corporation	MEX	AC 275V, 0.33μF, 40/085/21/C or 40/100/21/C	DIN EN 60384-14	VDE 40028973
(Alternative)	Tenta Electric Industrial Co., Ltd.	MEX	AC 275V, 0.33μF, 40/100/21/B	DIN EN 60384-14	VDE 119119
(Alternative)	Wujiang Taixing Electronic Co., Ltd.	TNS-2TH	AC 275V, 0.33μF, 40/085/21/C or 40/100/21/C	DIN EN 60384-14	VDE 117515
Internal wire	Zhengjiang Xinda Electric Cable Co., Ltd.	227IEC08 (RV-90)	300/500V, 0.5mm <sup>2</sup>	EN 62841-1 EN IEC 62841-2-6	Tested with appliance
Inductor	Zhejiang Hangbo Power Tools Co., Ltd.	--	130μH	EN 62841-1 EN IEC 62841-2-6	Tested with appliance
Heat-shrinkable tube	SHENZHEN WOER HEAT-SHRINKABLE MATERIAL CO LTD	RSFR RSFR-H	600V, 125°C, VW-1	EN 62841-1 EN IEC 62841-2-6	Tested with appliance + UL E203950
Label	WUXI ZHENG FENG SPECIAL PRINTING CO LTD	ZF/01	- 40-80°C, affixed to PA enclosure	UL969	UL MH45085
		ZF/02	- 40-100°C, affixed to PA enclosure		
		ZF04	- 40-80°C, affixed to PA enclosure		

## Remark:

- 1) License available upon request.  
 2) The plug and power cord shall be matched in accordance with the plug certificate.